

C-WP-D-TR Series


Traditional-Style LED Wall Pack with Glass Lens

Replaces up to 400W PSMH

C-LITE
LED LIGHTING

PACK UP THIS ONE

Our dimmable cULus Listed Traditional-Style LED Wall Pack has a glass lens, delivers up to 23,400 lumens, is available in 4000K and 5000K, and comes with a 5-year limited warranty. It also features four ½" NPS tapped conduit knockouts for flexibility with mounting options.

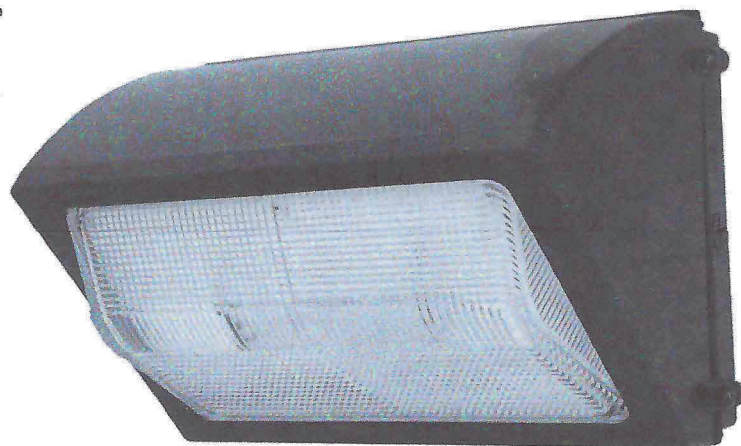

PRODUCT SPECIFICATIONS

OVERVIEW

- Max. Delivered Lumens: Up to 23,400 Lumens
- CRI: ≥ 80 (4L, 6L, 9L & 14L), ≥ 70 (18L & 23L)
- CCT: 4000K or 5000K
- Input Power: 30W (4L), 45W (6L), 67W (9L), 106W (14L), 136W (18L), 166W (23L)
- Estimated L70 Lifetime @ 25°C: > 100,000 Hours
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: <20% at full load
- Limited Warranty: 5-Year*
- Replaces: 100W PSMH (4L), 150W PSMH (6L), 250W MH (9L), 320W PSMH (14L), 400W MH (18L), 400W PSMH (23L)

FEATURES	RECOMMENDED USE	INPUT VOLTAGE
• Borosilicate prismatic glass lens • 0-10V Dimming to 10% • Extremely efficient with over 130LPW on every fixture • Easy installation • FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions	• Entryways • General Area Lighting • Perimeter Lighting • Storage Facilities	• Universal (120V - 277V)

CERTIFICATIONS:



CA RESIDENTS WARNING: Cancer and Reproductive Harm –
www.p65warnings.ca.gov



C-WP-D-TR Series

FIXTURE SPECIFICATIONS

HOUSING	Heavy-duty dark bronze die-cast aluminum
LENS ASSEMBLY	Borosilicate prismatic glass lens
MOUNTING	Four 1/2" NPS tapped conduit knockouts for flexibility with mounting options

LUMINAIRE AND ELECTRICAL PERFORMANCE

OPERATING TEMPERATURE RANGE	ESTIMATED L ₇₀ LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION
-40°F to 104°F (-40°C to 40°C)	> 100,000 Hours	> 0.9 at full load	<20% at full load

SKU	REPLACES	LUMEN OUTPUT	BUG RATINGS*	SYSTEM WATTS	CURRENT DRAW (AMPS)			
					120V	208V	240V	277V
C-WP-D-TR-4L-40K-UL-BZ	100W PSMH	4300 L	B1-U3-G3	30W	0.251	0.15	0.132	0.117
C-WP-D-TR-4L-50K-UL-BZ		4200 L						
C-WP-D-TR-6L-40K-UL-BZ	150W PSMH	6200 L	B1-U3-G4	45W	0.384	0.227	0.20	0.176
C-WP-D-TR-6L-50K-UL-BZ		6400 L						
C-WP-D-TR-9L-40K-UL-B	250W MH	9100 L	B2-U4-G3	67W	0.57	0.35	0.31	0.30
C-WP-D-TR-9L-50K-UL-BZ		9200 L	B2-U4-G4					
C-WP-D-TR-14L-40K-UL-BZ	320W PSMH	14,000 L	B3-U4-G4	106W	0.89	0.53	0.46	0.42
C-WP-D-TR-14L-50K-UL-BZ		14,300 L	B2-U4-G5					
C-WP-D-TR-18L-40K-UL-BZ	400W MH	18,600 L	B3-U4-G4	136W	1.20	0.67	0.59	0.52
C-WP-D-TR-18L-50K-UL-BZ		18,700 L						
C-WP-D-TR-23L-40K-UL-BZ	400W PSMH	22,600 L	B3-U5-G5	166W	1.43	0.83	0.73	0.63
C-WP-D-TR-23L-50K-UL-BZ		23,400 L						

* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>. Valid with no tilt.

C-WP-D-TR Series

ORDERING INFORMATION



Example SKU: C-WP-D-TR-4L-40K-UL-BZ

C-WP	D	TR				UL	BZ
PRODUCT	SERIES	STYLE	LUMEN PACKAGE			COLOR TEMP	HOUSING COLOR
C-WP	D	TR Traditional-Style	4L 4300 (4000K) 4200 (5000K) 30W	9L 9100 (4000K) 9200 (5000K) 67W	18L 18,600 (4000K) 18,700 (5000K) 136W	40K Neutral White (4000K) 50K Cool White (5000K)	UL Universal (120-277V) BZ Dark Bronze
			6L 6200 (4000K) 6400 (5000K) 45W	14L 14,000 (4000K) 14,300 (5000K) 106W	23L 22,600 (4000K) 23,400 (5000K) 166W		

C-WP-D-TR-4L, 6L, 9L & 14L

14" W



9-1/4" D

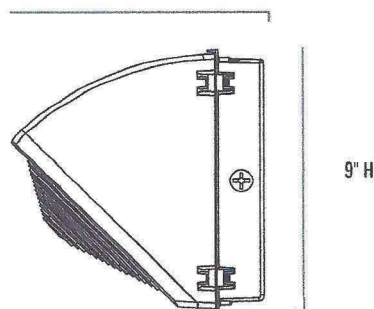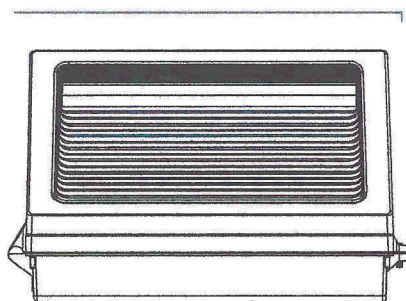

C-WP-D-TR-18L & 23L

18" W

10" D

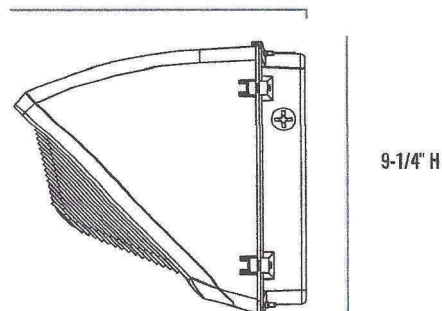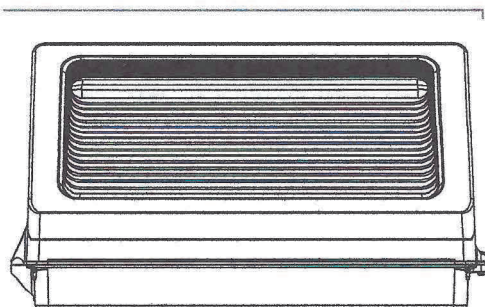

SERIES OVERVIEW


DIMENSIONS	PRODUCT WEIGHT	MOUNTING HEIGHT	SPACING
9-1/4" D x 14" W x 9" H (4L, 6L, 9L & 14L), 10" D x 18" W x 9-1/4" H (18L & 23L)	8.4 lbs. (4L), 9.08 lbs. (6L), 10.05 lbs. (9L), 10.34 lbs. (14L), 15.92 lbs. (18L), 17.4 lbs. (23L)	10 to 15 feet (4L) & 20 to 25 feet (6L, 9L, 14L, 18L, 23L)	2 to 3 times the mounting height

C-WP-D-TR Series

ISO PLOT CHARTS


C-WP-D-TR-4L-50K

Mounting Height: 10'

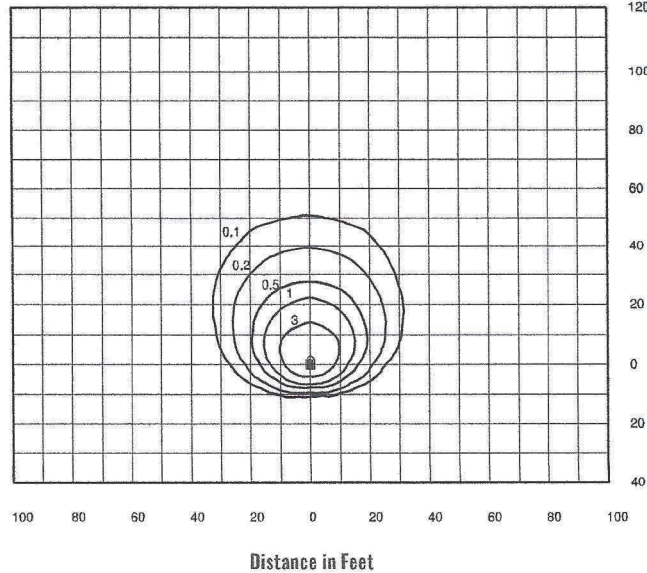


C-WP-D-TR-6L-50K

Mounting Height: 15'

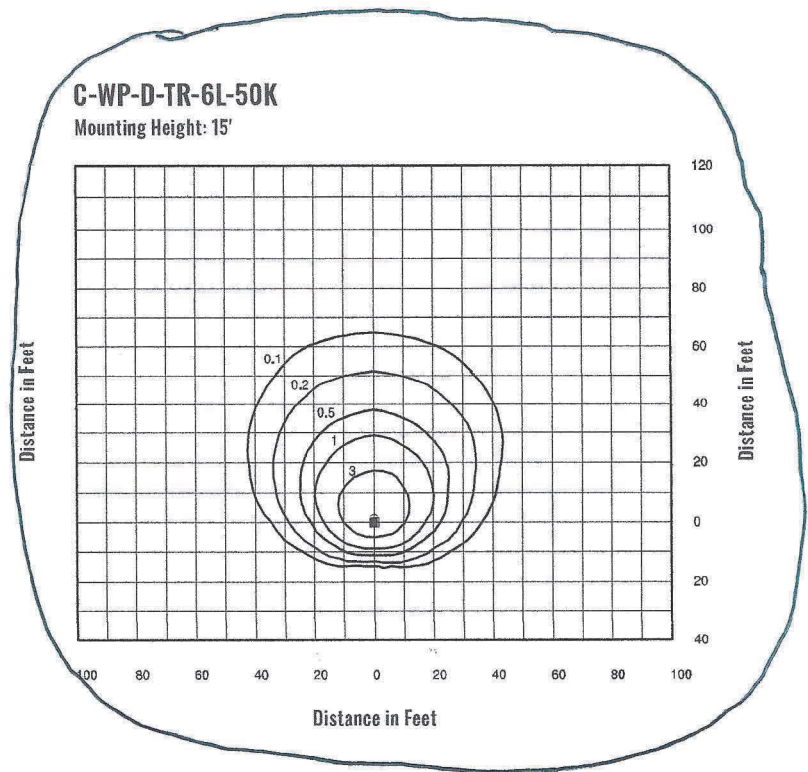


C-WP-D-TR-9L-50K

Mounting Height: 20'

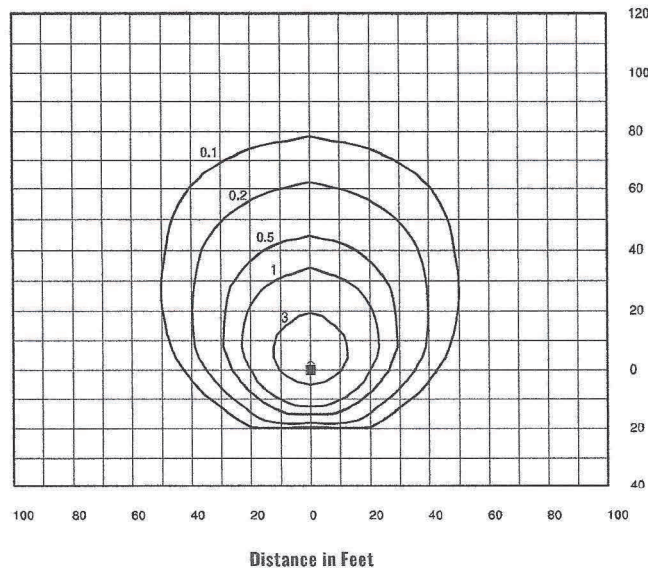

C-WP-D-TR-14L-50K

Mounting Height: 25'

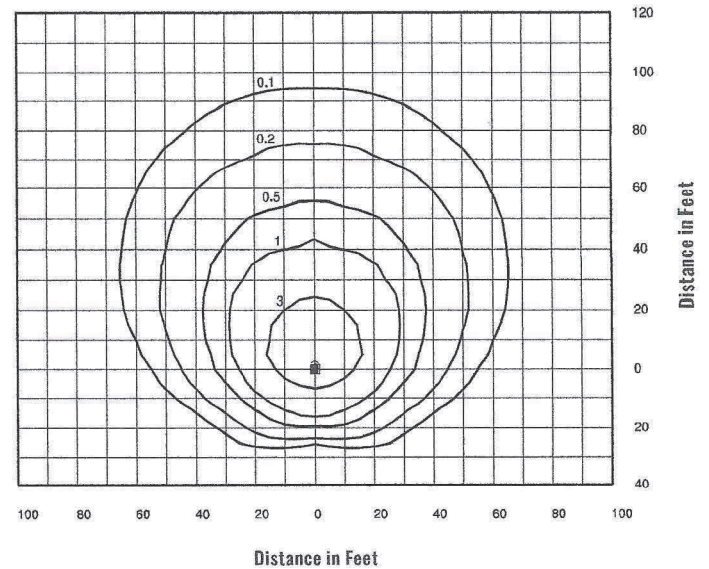

Note: All published photometric testing performed to IES LM-79 standards. Fixture photometry was completed on a single representative fixture. Foot candle levels are noted inside graph.