

PARKS, RECREATION & FORESTRY

1900 AVIATION DRIVE
WAUKESHA, WISCONSIN 53188-2471
TELEPHONE 262/524-3737 FAX 262/524-3713

Ron Grall, Director
rgrall@waukesha-wi.gov

To: Parks, Recreation & Forestry Board (PRFB)
From: Melissa Lipska, Parks & Forestry Operations Manger
Date: January 17, 2022

Re: PRFB Agenda Item – Approve the Purchase of a 2022 ASV Compact Tracked Loader with Attachments and Trailer

This request is for the final approval to purchase a new 2022 ASV Compact Tracked Loader with Trailer for \$124,301.23. A bucket and forestry cutting head attachments are also included. This was approved in the 2021 Fleet CIP Budget with an amount of \$111,500. The additional funds needed will come from the savings realized from the #62 Hi Range Aerial Lift replacement purchase. This is replacing a grader that due to its size no longer fits our operational needs. This was sent out to bid in accordance with the finance polices. This compact tracked loader with attachments and trailer meets all specifications as written into the bid. Attached you will find supporting documentation.

Thank you,

Melissa Lipska

Melissa Lipska
Parks and Forestry Operations Manager

Approval at WPRF Board meeting 1/17/22



CITY OF WAUKESHA
PARKS, RECREATION AND FORESTRY DEPARTMENT
ASV Compact Tracked Loader and Trailer 2022 Bid

BIDS RECEIVED: 1/12/2022

LUMP SUM BID

LF George Inc.
W231 N1129 County Road F
Waukesha, WI 53186
ATTN: Dan McCarthy


\$124,301.33 includes bucket,
forestry head, and trailer.
Meets all specifications
as written.

R Equipment
2252 Munz Road
Dodgeville, WI 53533
ATTN: Chuck

Could not meet deadline.

Duffy Sales
1660 Hwy 8
Barron, WI 54812
ATTN: Russ Rydberg

Declined to Bid.



PARKS, RECREATION & FORESTRY
 1900 AVIATION DRIVE
 WAUKESHA, WISCONSIN 53188-2471
 TELEPHONE 262/524-3737
 FAX 262/524-3713

Ron Grall, Director
rgrall@waukesha-wi.gov

Bids Due: January 12, 2022 at 3:00 P.M.

EMAIL TO:

mlipska@waukesha-wi.gov

**CITY OF WAUKESHA PARKS, RECREATION AND FORESTRY
 1900 AVIATION DRIVE
 WAUKESHA, WI 53188**

BID FORM

BIDDER: LF George Inc

ADDRESS: W231 N1129 County Hwy F

Waukesha WI 53186

DOES EQUIPMENT BID MEET MINIMUM SPECIFICATIONS? YES

IF ABOVE ANSWER IS "NO", LIST EXCEPTIONS:

tool box on trailer is frame mounted and Belshe OEM

INDICATE WHEN DELIVERY WILL BE MADE AFTER RECEIPT OF ORDER: _____

8-12 months

LIST PRICE PER "SPECS": 160,305

COST OF 2022 ASV Compact Track Loader with Loftness Forestry Head: 110,670.²³

COST OF 2022 TB16-2EP Belshe Trailer: 13,631

NET COST OF 2022 ASV Compact Track Loader with Loftness Forestry Head and Belshe Trailer: 124,301.²³

MAX-SERIES

RT-75

HEAVY DUTY

BUILT FOR THE HEAVIEST DUTIES.



Introducing the RT-75 HD MAX-Series Posi-Track® compact track loader—a machine that's built to get more done, especially in forestry and mulching applications, while requiring less maintenance. The RT-75 HD provides the industry's highest ground clearance, lowest ground pressure, longest track life and best traction over all types of surfaces while also providing some heavy-duty extras. And with the MAX-Series cab features—like premium 360-degree visibility, a state-of-the-art control panel and more room than ever—operators will experience the best in performance, comfort, durability and productivity in even the toughest conditions.

// NEXT-LEVEL DURABILITY / PREMIUM CAB / MAXIMUM PRODUCTIVITY

asv

RT-75 HEAVY DUTY COMPACT TRACK LOADER

OPERATING SPECIFICATIONS

LOADER ARMS	Radial
OPERATING WEIGHT	9,210 lbs (4,178 kg)
SHIPPING WEIGHT	8,463 lbs (3,839 kg)
GROUND PRESSURE AT OPERATING WEIGHT	3.6 psi (24.8 kPa)
RATED OPERATING CAPACITY (35% of tipping load)	2,800 lbs (1,270 kg)
OPERATING CAPACITY (50% of tipping load)	4,000 lbs (1,814 kg)
TIPPING LOAD	8,000 lbs (3,629 kg)
TRAVEL SPEED, MAXIMUM- 1 ST SPEED	6.3 mph (10.1 kph)
TRAVEL SPEED, MAXIMUM- 2 ND SPEED	9.3 mph (15 kph)

ENGINE

TYPE	Diesel, 4-cylinder, intercooled, turbocharged
MODEL	Cummins QSF2.8
DISPLACEMENT	171 in. ³ (2.8 L)
GROSS POWER RATING AT 2600 RPM	74.0 hp (55 kW)
TORQUE, PEAK	221 ft-lb (300 Nm)
COOLING SYSTEM	Temperature-controlled variable speed hydraulically-driven auto-reversing fan and coolant/anti-freeze-filled radiator
INTAKE AIR CLEANER	Dual stage
EMISSION CONTROLS	Meets all U.S. EPA Tier 4 final standards

UNDERCARRIAGE

TRACK TYPE: General purpose track constructed of rubber compound with embedded co-polymer cords and all-purpose treads.

TRACK WIDTH	18 in. (475 mm)
LENGTH OF TRACK ON GROUND	71 in. (1,803 mm)
GROUND CONTACT AREA	2,556 in. ² (1.65 m ²)
DRIVE SYSTEM	Two hydrostatic direct drive sprockets controlled by single joystick
TRACK DRIVE SPROCKET	Elevated with low-friction, replaceable sprocket rollers
UNDERCARRIAGE SUSPENSION	Two independent torsion axles per undercarriage
ROLLER WHEELS	24 high-density polyurethane and rubber wheels per track. Wheels include sealed bearings
ROLLER WHEEL DIAMETER	Front & rear wheels: 15 in. (381 mm) Middle wheels: 10 in. (254 mm)

AUXILIARY HYDRAULIC SYSTEM

STANDARD PUMP CAPACITY	0-22.6 gpm (85.5 lpm)
OPTIONAL HIGH FLOW	35.7 gpm (135 lpm)
SYSTEM PRESSURE, MAX.	3,300 psi (22,750 kPa)
CONTROLS	Intermittent via joystick button or continuous via console switch, mode selectable via dash-mounted switch
COUPLERS	Push-to-connect quick couplers mounted on loader arms. Pressure relief valve mounted to coupler block
COOLING SYSTEM	High efficiency side-by-side radiator, auto-reversing fan and oil cooler

ELECTRICAL SYSTEM

NOMINAL CHARGE	12 V
BATTERY	950 CCA
CHARGING SYSTEM	120 amp alternator
OUTLETS	1-12 V port inside operator station
WIRING	Pre-wired for all factory-available accessories

OPERATOR STATION

SEAT: Vinyl seat with built in operator presence switch, Operator Manual pouch, and 2 in (51 mm) wide seat belt, adjustable position seat optional


LOADER CONTROL: Right-hand pilot hydraulic joystick controls loader lift, lower and tilt, plus intermittent control of auxiliary hydraulic.

DRIVE CONTROL: Left-hand pilot hydraulic joystick controls machine speed and direction.

ENGINE SPEED: Hand-operated dial and foot throttle.

MACHINE DISPLAY: Engine RPM, engine oil pressure, hydraulic oil high temperature, engine coolant temperature, battery voltage, hourmeter, fuel level, trip meter, engine diagnostics, system monitoring, fault logging. Deluxe includes: 7" color touch screen, integrated rear view camera, password protection with user profiles, job clock, maintenance schedules

ROPS	Restraint-ISO 6683, SAE J2292, Cal OSHA 1596, ISO 3471
FOPS	Meets ISO 3449: Level I and II
ILLUMINATION	2 - Fixed forward-facing halogen lights 2 - Adjustable rear-facing halogen lights 2 - LED Side lights (optional) 1 - Interior light
CONVENIENCE	12 V power port
STANDARD FEATURES	Horn, backup alarm, cupholder, phoneholder, behind seat storage, rear view mirror, lapbar, roof escape hatch, roof panel & rear cab windows. Premium Features: Adjustable joystick & arm rest positions, adjustable directional & air flow HVAC vents, radio with bluetooth & USB, frameless front door, attachment control kit, wiper/washer, beacon switch/outlet, easy-off door

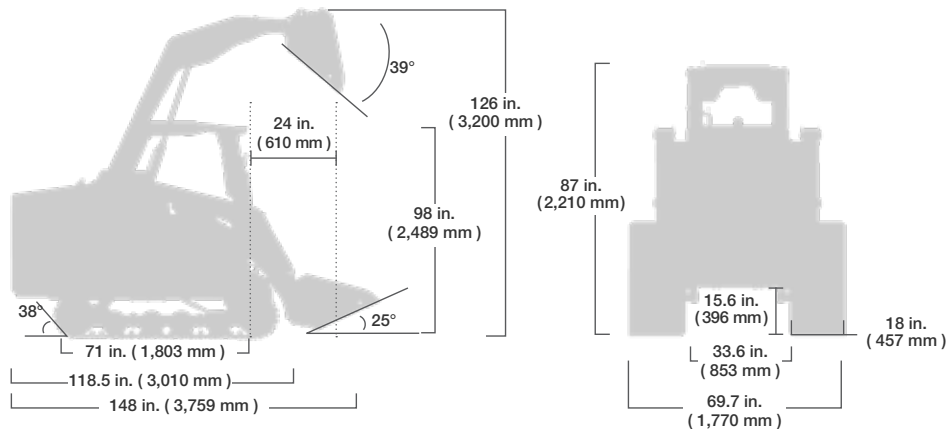


Belshe

INDUSTRIES INC.

Model TB16-2EP

GVWR:
16000 LBS.

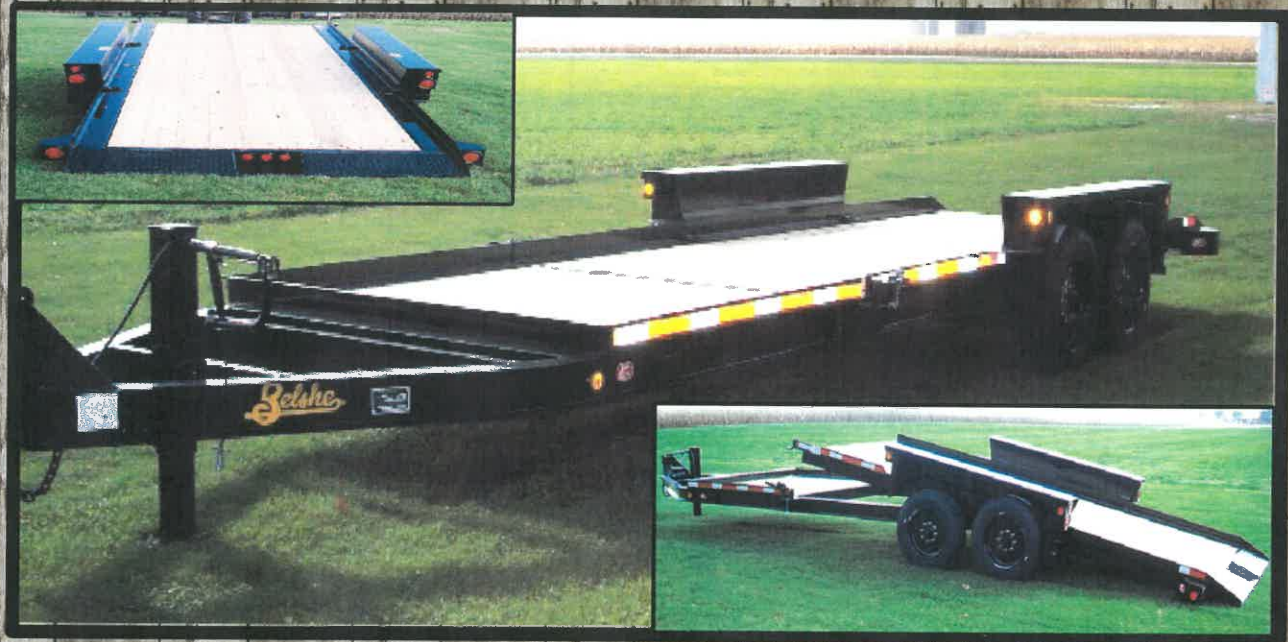

Pictured w/Optional 6' Stationary Deck

Specifications:

Overall Length.....	23'5"
Overall Width.....	102"
Deck Length.....	16'
Deck Height.....	23"

Equipped With:

- Rubber Mounted Lights
- Tag Light and Safety Chains
- 12,000# Drop Leg Jack
- 215/75R 17.5" 16 Ply

Check out our Website:
www.belshetrailers.com

Note: GVWR equals the total
of empty weight + load

A rugged, well-built trailer is
just as important as the
equipment you haul on it!
You just can't do better than
a Belshe Trailer!

Standard Features

Capacities

GVWR: 16,000 lbs.
Trailer Wt: 4,460 lbs.

Dimensions

Dove Width: Full width
Overall Width: 102"
Between Fenders: 81.5"
Deck Height: 23" level
Fender Height: 12" from deck
Tongue Length: 50" to hitch plate
Deck Length: 16'
Dove Length: 12"
Overall Length: 23.5' from hitch plate to rear

Running Gear

Axle Capacity: 8,000 lbs. x 2 each w/grease lube
Brakes: 12" x 2" electric
Suspension: Torsion axles
Wheels: 17.5" 8 bolt
Tires: 215/75R 17.5" 16 ply

Frame Material

Outer Rails: 6" wide flange I-beam
Cross Members: 4" channel
Outer Rail: 6" wide flanged I-beam
Fenders: 10 gauge formed

Features:

Coupling: Adjustable pintle ring
Safety Chains: .375" grade 70 w/slip hooks
Jack: 12,000 lbs. Drop leg
Flooring: 2" x 8" nominal lumber
Tie Downs: 4 ea. D-rings
Lighting: 12 volt sealed beam, rubber mounted lights; meets DOT specs
Breakaway System: 12 volt w/battery, battery box, tow charger & switch; meets DOT specs
Paint: Manufacture's standard yellow enamel & primer
Warranty: 1 year against defects in workmanship & materials

HOME OFFICE:

BELSHE INDUSTRIES, INC.
P.O. Box 626
TECUMSEH, OK 74873
PHONE: (405) 273-1690
FAX: (405) 273-2399

OHIO BRANCH:

BELSHE INDUSTRIES, INC.
11289 MANGEN RD.
VERSAILLES, OHIO 45380
PHONE: (866) 217-7440
FAX: (937) 526-9120

Colors

BLUE, RED, BLACK,
YELLOW, GREEN

OTHER COLORS ARE AVAILABLE WITH
A NOMINAL CHARGE.

DEALER: