



# D-Series Size 1 LED Wall Luminaire



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.


d#series

## Specifications Luminaire

|                |                   |                |                 |
|----------------|-------------------|----------------|-----------------|
| <b>Width:</b>  | 13-3/4" (34.9 cm) | <b>Weight:</b> | 12 lbs (5.4 kg) |
| <b>Depth:</b>  | 10" (25.4 cm)     |                |                 |
| <b>Height:</b> | 6-3/8" (16.2 cm)  |                |                 |

## Back Box (BBW, ELCW)

|                |                   |                     |                 |
|----------------|-------------------|---------------------|-----------------|
| <b>Width:</b>  | 13-3/4" (34.9 cm) | <b>BBW Weight:</b>  | 5 lbs (2.3 kg)  |
| <b>Depth:</b>  | 4" (10.2 cm)      | <b>ELCW Weight:</b> | 10 lbs (4.5 kg) |
| <b>Height:</b> | 6-3/8" (16.2 cm)  |                     |                 |

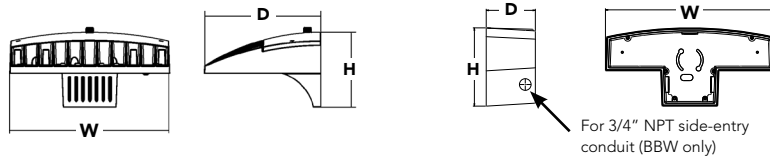

## Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

## Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DBBTD

| Series           | LEDs   | Drive Current   | Color temperature  | Distribution  | Voltage   | Mounting  | Control Options  |
|------------------|--|---|--|---|---|---|--|
| <b>DSXW1 LED</b> | <b>10C</b> 10 LEDs (one engine)<br><b>20C</b> 20 LEDs (two engines) <sup>1</sup> | <b>350</b> 350 mA<br><b>530</b> 530 mA<br><b>700</b> 700 mA<br><b>1000</b> 1000 mA (1 A) <sup>1</sup> | <b>30K</b> 3000 K<br><b>40K</b> 4000 K<br><b>50K</b> 5000 K<br><b>AMBPC</b> Amber phosphor converted | <b>T2S</b> Type II Short<br><b>T2M</b> Type II Medium<br><b>T3S</b> Type III Short<br><b>T3M</b> Type III Medium<br><b>T4M</b> Type IV Medium<br><b>TFTM</b> Forward Throw Medium | <b>MVOLT</b> <sup>2</sup><br><b>120</b> <sup>3</sup><br><b>208</b> <sup>3</sup><br><b>240</b> <sup>3</sup><br><b>277</b> <sup>3</sup><br><b>347</b> <sup>3,4</sup><br><b>480</b> <sup>3,4</sup> | <b>Shipped included</b><br>(blank) Surface mounting bracket<br><b>BBW</b> Surface-mounted back box (for conduit entry) <sup>5</sup> | <b>Shipped installed</b><br><b>PE</b> Photoelectric cell, button type <sup>6</sup><br><b>DMG</b> 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)<br><b>PIR</b> 180° motion/ambient light sensor, <15' mtg ht <sup>1,7</sup><br><b>PIRH</b> 180° motion/ambient light sensor, 15-30' mtg ht <sup>1,7</sup><br><b>PIR1FC3V</b> Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>1,7</sup><br><b>PIRH1FC3V</b> Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>1,7</sup><br><b>ELCW</b> Emergency battery backup (includes external component enclosure), CA Title 20 Noncompliant <sup>8,9</sup> |

### Other Options

### Finish (required)

#### Shipped installed

|            |  |
|------------|--|
| <b>SF</b>  | Single fuse (120, 277 or 347V) <sup>3,10</sup> |
| <b>DF</b>  | Double fuse (208, 240 or 480V) <sup>3,10</sup> |
| <b>HS</b>  | House-side shield <sup>11</sup>                |
| <b>SPD</b> | Separate surge protection <sup>12</sup>        |

#### Shipped separately<sup>11</sup>

|            |                       |
|------------|-----------------------|
| <b>BSW</b> | Bird-deterrent spikes |
| <b>WG</b>  | Wire guard            |
| <b>VG</b>  | Vandal guard          |
| <b>DDL</b> | Diffused drop lens    |

|              |                  |               |                           |
|--------------|------------------|---------------|---------------------------|
| <b>DDBXD</b> | Dark bronze      | <b>DSSXD</b>  | Sandstone                 |
| <b>DBLXD</b> | Black            | <b>DBBTD</b>  | Textured dark bronze      |
| <b>DNAXD</b> | Natural aluminum | <b>DBLBXD</b> | Textured black            |
| <b>DWHXD</b> | White            | <b>DNATXD</b> | Textured natural aluminum |

|               |                    |
|---------------|--------------------|
| <b>DWHGXD</b> | Textured white     |
| <b>DSSTXD</b> | Textured sandstone |

## Accessories

Ordered and shipped separately.

|           |  |
|-----------|--|
| DSXWHS U  | House-side shield (one per light engine) |
| DSXWBSW U | Bird-deterrent spikes                    |
| DSXW1WG U | Wire guard accessory                     |
| DSXW1VG U | Vandal guard accessory                   |

### NOTES

- 20C 1000 is not available with PIR, PIRH, PIR1FC3V or PIRH1FC3V.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Reference Motion Sensor table on page 3.
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at [www.lithonia.com](http://www.lithonia.com)
- Not available with SPD.
- Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- Not available with ELCW.



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| LEDs      | Drive Current (mA) | System Watts | Dist. Type | 30K (3000 K, 70CRI) |   |   |     |       | 40K (4000 K, 70CRI) |   |   |     |       | 50K (5000 K, 70CRI) |   |   |     |       | AMBPC (Amber Phosphor Converted) |   |   |    |     |
|-----------|--------------------|--------------|------------|---------------------|---|---|-----|-------|---------------------|---|---|-----|-------|---------------------|---|---|-----|-------|----------------------------------|---|---|----|-----|
|           |                    |              |            | Lumens              | B | U | G   | LPW   | Lumens              | B | U | G   | LPW   | Lumens              | B | U | G   | LPW   | Lumens                           | B | U | G  | LPW |
| (10 LEDs) | 350mA              | 13W          | T2S        | 1,415               | 0 | 0 | 1   | 109   | 1,520               | 0 | 0 | 1   | 117   | 1,530               | 0 | 0 | 1   | 118   | 894                              | 0 | 0 | 1  | 69  |
|           |                    |              | T2M        | 1,349               | 0 | 0 | 1   | 104   | 1,448               | 0 | 0 | 1   | 111   | 1,458               | 0 | 0 | 1   | 112   | 852                              | 0 | 0 | 1  | 66  |
|           |                    |              | T3S        | 1,399               | 0 | 0 | 1   | 108   | 1,503               | 0 | 0 | 1   | 116   | 1,512               | 0 | 0 | 1   | 116   | 884                              | 0 | 0 | 1  | 68  |
|           |                    |              | T3M        | 1,385               | 0 | 0 | 1   | 107   | 1,488               | 0 | 0 | 1   | 114   | 1,497               | 0 | 0 | 1   | 115   | 876                              | 0 | 0 | 1  | 67  |
|           |                    |              | T4M        | 1,357               | 0 | 0 | 1   | 104   | 1,458               | 0 | 0 | 1   | 112   | 1,467               | 0 | 0 | 1   | 113   | 858                              | 0 | 0 | 1  | 66  |
|           |                    |              | TFTM       | 1,411               | 0 | 0 | 1   | 109   | 1,515               | 0 | 0 | 1   | 117   | 1,525               | 0 | 0 | 1   | 117   | 892                              | 0 | 0 | 1  | 69  |
|           | 530 mA             | 19W          | ASYDF      | 1,262               | 1 | 0 | 1   | 97    | 1,354               | 1 | 0 | 1   | 104   | 1,363               | 1 | 0 | 1   | 105   | 797                              | 0 | 0 | 1  | 61  |
|           |                    |              | T2S        | 2,053               | 1 | 0 | 1   | 108   | 2,205               | 1 | 0 | 1   | 116   | 2,220               | 1 | 0 | 1   | 117   | 1,264                            | 0 | 0 | 1  | 67  |
|           |                    |              | T2M        | 1,957               | 1 | 0 | 1   | 103   | 2,102               | 1 | 0 | 1   | 111   | 2,115               | 1 | 0 | 1   | 111   | 1,205                            | 0 | 0 | 1  | 63  |
|           |                    |              | T3S        | 2,031               | 1 | 0 | 1   | 107   | 2,181               | 1 | 0 | 1   | 115   | 2,194               | 1 | 0 | 1   | 115   | 1,250                            | 0 | 0 | 1  | 66  |
|           |                    |              | T3M        | 2,010               | 1 | 0 | 1   | 106   | 2,159               | 1 | 0 | 1   | 114   | 2,172               | 1 | 0 | 1   | 114   | 1,237                            | 0 | 0 | 1  | 65  |
|           |                    |              | T4M        | 1,970               | 1 | 0 | 1   | 104   | 2,115               | 1 | 0 | 1   | 111   | 2,129               | 1 | 0 | 1   | 112   | 1,212                            | 0 | 0 | 1  | 64  |
|           | 700 mA             | 26W          | TFTM       | 2,047               | 0 | 0 | 1   | 108   | 2,198               | 1 | 0 | 1   | 116   | 2,212               | 1 | 0 | 1   | 116   | 1,260                            | 0 | 0 | 1  | 66  |
|           |                    |              | ASYDF      | 1,831               | 1 | 0 | 1   | 96    | 1,966               | 1 | 0 | 1   | 103   | 1,978               | 1 | 0 | 1   | 104   | 1,127                            | 0 | 0 | 1  | 59  |
|           |                    |              | T2S        | 2,623               | 1 | 0 | 1   | 101   | 2,816               | 1 | 0 | 1   | 108   | 2,834               | 1 | 0 | 1   | 109   | 1,544                            | 0 | 0 | 1  | 59  |
|           |                    |              | T2M        | 2,499               | 1 | 0 | 1   | 96    | 2,684               | 1 | 0 | 1   | 103   | 2,701               | 1 | 0 | 1   | 104   | 1,472                            | 0 | 0 | 1  | 57  |
|           |                    |              | T3S        | 2,593               | 1 | 0 | 1   | 100   | 2,785               | 1 | 0 | 1   | 107   | 2,802               | 1 | 0 | 1   | 108   | 1,527                            | 0 | 0 | 1  | 59  |
|           |                    |              | T3M        | 2,567               | 1 | 0 | 1   | 99    | 2,757               | 1 | 0 | 1   | 106   | 2,774               | 1 | 0 | 1   | 107   | 1,512                            | 0 | 0 | 1  | 58  |
|           | 1000 mA            | 39W          | T4M        | 2,515               | 1 | 0 | 1   | 97    | 2,701               | 1 | 0 | 1   | 104   | 2,718               | 1 | 0 | 1   | 105   | 1,481                            | 0 | 0 | 1  | 57  |
|           |                    |              | TFTM       | 2,614               | 1 | 0 | 1   | 101   | 2,808               | 1 | 0 | 1   | 108   | 2,825               | 1 | 0 | 1   | 109   | 1,539                            | 0 | 0 | 1  | 59  |
|           |                    |              | ASYDF      | 2,337               | 1 | 0 | 1   | 90    | 2,510               | 1 | 0 | 1   | 97    | 2,525               | 1 | 0 | 1   | 97    | 1,376                            | 1 | 0 | 1  | 53  |
|           |                    |              | T2S        | 3,685               | 1 | 0 | 1   | 94    | 3,957               | 1 | 0 | 1   | 101   | 3,982               | 1 | 0 | 1   | 102   | 2,235                            | 1 | 0 | 1  | 57  |
|           |                    |              | T2M        | 3,512               | 1 | 0 | 1   | 90    | 3,771               | 1 | 0 | 1   | 97    | 3,794               | 1 | 0 | 1   | 97    | 2,130                            | 1 | 0 | 1  | 55  |
|           |                    |              | T3S        | 3,644               | 1 | 0 | 1   | 93    | 3,913               | 1 | 0 | 1   | 100   | 3,938               | 1 | 0 | 1   | 101   | 2,210                            | 1 | 0 | 1  | 57  |
| (20 LEDs) | 350mA              | 23W          | T3M        | 3,607               | 1 | 0 | 1   | 92    | 3,873               | 1 | 0 | 1   | 99    | 3,898               | 1 | 0 | 1   | 100   | 2,187                            | 1 | 0 | 1  | 56  |
|           |                    |              | T4M        | 3,534               | 1 | 0 | 2   | 91    | 3,796               | 1 | 0 | 2   | 97    | 3,819               | 1 | 0 | 2   | 98    | 2,143                            | 1 | 0 | 1  | 55  |
|           |                    |              | TFTM       | 3,673               | 1 | 0 | 1   | 94    | 3,945               | 1 | 0 | 1   | 101   | 3,969               | 1 | 0 | 1   | 102   | 2,228                            | 1 | 0 | 1  | 57  |
|           |                    |              | ASYDF      | 3,284               | 1 | 0 | 2   | 84    | 3,527               | 1 | 0 | 2   | 90    | 3,549               | 1 | 0 | 2   | 91    | 1,992                            | 1 | 0 | 1  | 51  |
|           |                    |              | T2S        | 2,820               | 1 | 0 | 1   | 123   | 3,028               | 1 | 0 | 1   | 132   | 3,047               | 1 | 0 | 1   | 132   | 1,777                            | 1 | 0 | 1  | 77  |
|           |                    |              | T2M        | 2,688               | 1 | 0 | 1   | 117   | 2,886               | 1 | 0 | 1   | 125   | 2,904               | 1 | 0 | 1   | 126   | 1,693                            | 1 | 0 | 1  | 74  |
|           | 530 mA             | 35W          | T3S        | 2,789               | 1 | 0 | 1   | 121   | 2,994               | 1 | 0 | 1   | 130   | 3,014               | 1 | 0 | 1   | 131   | 1,757                            | 0 | 0 | 1  | 76  |
|           |                    |              | T3M        | 2,760               | 1 | 0 | 1   | 120   | 2,965               | 1 | 0 | 1   | 129   | 2,983               | 1 | 0 | 1   | 130   | 1,739                            | 1 | 0 | 1  | 76  |
|           |                    |              | T4M        | 2,704               | 1 | 0 | 1   | 118   | 2,905               | 1 | 0 | 1   | 126   | 2,922               | 1 | 0 | 1   | 127   | 1,704                            | 1 | 0 | 1  | 74  |
|           |                    |              | TFTM       | 2,811               | 1 | 0 | 1   | 122   | 3,019               | 1 | 0 | 1   | 131   | 3,038               | 1 | 0 | 1   | 132   | 1,771                            | 0 | 0 | 1  | 77  |
|           |                    |              | ASYDF      | 2,514               | 1 | 0 | 1   | 109   | 2,699               | 1 | 0 | 1   | 117   | 2,716               | 1 | 0 | 1   | 118   | 1,584                            | 1 | 0 | 1  | 69  |
|           |                    |              | T2S        | 4,079               | 1 | 0 | 1   | 117   | 4,380               | 1 | 0 | 1   | 125   | 4,407               | 1 | 0 | 1   | 126   | 2,504                            | 1 | 0 | 1  | 72  |
|           | 700 mA             | 46W          | T2M        | 3,887               | 1 | 0 | 1   | 111   | 4,174               | 1 | 0 | 1   | 119   | 4,201               | 1 | 0 | 1   | 120   | 2,387                            | 1 | 0 | 1  | 68  |
|           |                    |              | T3S        | 4,033               | 1 | 0 | 1   | 115   | 4,331               | 1 | 0 | 1   | 124   | 4,359               | 1 | 0 | 1   | 125   | 2,477                            | 1 | 0 | 1  | 71  |
|           |                    |              | T3M        | 3,993               | 1 | 0 | 2   | 114   | 4,288               | 1 | 0 | 2   | 123   | 4,315               | 1 | 0 | 2   | 123   | 2,451                            | 1 | 0 | 1  | 70  |
|           |                    |              | T4M        | 3,912               | 1 | 0 | 2   | 112   | 4,201               | 1 | 0 | 2   | 120   | 4,227               | 1 | 0 | 2   | 121   | 2,402                            | 1 | 0 | 1  | 69  |
|           |                    |              | TFTM       | 4,066               | 1 | 0 | 2   | 116   | 4,366               | 1 | 0 | 2   | 125   | 4,394               | 1 | 0 | 2   | 126   | 2,496                            | 1 | 0 | 1  | 71  |
|           |                    |              | ASYDF      | 3,636               | 1 | 0 | 2   | 104   | 3,904               | 1 | 0 | 2   | 112   | 3,928               | 1 | 0 | 2   | 112   | 2,232                            | 1 | 0 | 1  | 64  |
|           | 1000 mA            | 73W          | T2S        | 5,188               | 1 | 0 | 1   | 113   | 5,572               | 1 | 0 | 1   | 121   | 5,607               | 1 | 0 | 1   | 122   | 3,065                            | 1 | 0 | 1  | 67  |
|           |                    |              | T2M        | 4,945               | 1 | 0 | 2   | 108   | 5,309               | 1 | 0 | 2   | 115   | 5,343               | 1 | 0 | 2   | 116   | 2,921                            | 1 | 0 | 1  | 64  |
|           |                    |              | T3S        | 5,131               | 1 | 0 | 2   | 112   | 5,510               | 1 | 0 | 2   | 120   | 5,544               | 1 | 0 | 2   | 121   | 3,031                            | 1 | 0 | 1  | 66  |
|           |                    |              | T3M        | 5,078               | 1 | 0 | 2   | 110   | 5,454               | 1 | 0 | 2   | 119   | 5,487               | 1 | 0 | 2   | 119   | 3,000                            | 1 | 0 | 1  | 65  |
|           |                    |              | T4M        | 4,975               | 1 | 0 | 2   | 108   | 5,343               | 1 | 0 | 2   | 116   | 5,376               | 1 | 0 | 2   | 117   | 2,939                            | 1 | 0 | 1  | 64  |
|           |                    |              | TFTM       | 5,172               | 1 | 0 | 2   | 112   | 5,554               | 1 | 0 | 2   | 121   | 5,589               | 1 | 0 | 2   | 122   | 3,055                            | 1 | 0 | 1  | 66  |
| 1000 mA   | 73W                | ASYDF        | 4,624      | 1                   | 0 | 2 | 101 | 4,965 | 1                   | 0 | 2 | 108 | 4,996 | 1                   | 0 | 2 | 109 | 2,732 | 1                                | 0 | 1 | 59 |     |
|           |                    | T2S          | 7,204      | 1                   | 0 | 2 | 99  | 7,736 | 2                   | 0 | 2 | 106 | 7,784 | 2                   | 0 | 2 | 107 | 4,429 | 1                                | 0 | 1 | 61 |     |
|           |                    | T2M          | 6,865      | 1                   | 0 | 2 | 94  | 7,373 | 2                   | 0 | 2 | 101 | 7,419 | 2                   | 0 | 2 | 102 | 4,221 | 1                                | 0 | 1 | 58 |     |
|           |                    | T3S          | 7,125      | 1                   | 0 | 2 | 98  | 7,651 | 1                   | 0 | 2 | 105 | 7,698 | 1                   | 0 | 2 | 105 | 4,380 | 1                                | 0 | 1 | 60 |     |
|           |                    | T3M          | 7,052      | 1                   | 0 | 2 | 97  | 7,573 | 2                   | 0 | 2 | 104 | 7,620 | 2                   | 0 | 2 | 104 | 4,335 | 1                                | 0 | 2 | 59 |     |
|           |                    | T4M          | 6,909      | 1                   | 0 | 2 | 95  | 7,420 | 1                   | 0 | 2 | 102 | 7,466 | 1                   | 0 | 2 | 102 | 4,248 | 1                                | 0 | 2 | 58 |     |
|           |                    |              | TFTM       | 7,182               | 1 | 0 | 2   | 98    | 7,712               | 1 | 0 | 2   | 106   | 7,761               | 1 | 0 | 2   | 106   | 4,415                            | 1 | 0 | 2  | 60  |
|           |                    |              | ASYDF      | 6,421               | 2 | 0 | 2   | 88    | 6,896               | 2 | 0 | 3   | 94    | 6,938               | 2 | 0 | 3   | 95    | 3,947                            | 1 | 0 | 2  | 54  |



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient |       | Lumen Multiplier |
|---------|-------|------------------|
| 0°C     | 32°F  | 1.02             |
| 10°C    | 50°F  | 1.01             |
| 20°C    | 68°F  | 1.00             |
| 25°C    | 77°F  | 1.00             |
| 30°C    | 86°F  | 1.00             |
| 40°C    | 104°F | 0.98             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the DSXW1 LED 20C 1000 platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours          | 0   | 25,000 | 50,000 | 100,000 |
|--------------------------|-----|--------|--------|---------|
| Lumen Maintenance Factor | 1.0 | 0.95   | 0.93   | 0.88    |

### Electrical Load

| LEDs | Drive Current (mA) | System Watts | Current (A) |      |      |      |      |      |
|------|--------------------|--------------|-------------|------|------|------|------|------|
|      |                    |              | 120V        | 208V | 240V | 277V | 347V | 480V |
| 10C  | 350                | 14 W         | 0.13        | 0.07 | 0.06 | 0.06 | -    | -    |
|      | 530                | 20 W         | 0.19        | 0.11 | 0.09 | 0.08 | -    | -    |
|      | 700                | 27 W         | 0.25        | 0.14 | 0.13 | 0.11 | -    | -    |
|      | 1000               | 40 W         | 0.37        | 0.21 | 0.19 | 0.16 | -    | -    |
| 20C  | 350                | 24 W         | 0.23        | 0.13 | 0.12 | 0.10 | -    | -    |
|      | 530                | 36 W         | 0.33        | 0.19 | 0.17 | 0.14 | -    | -    |
|      | 700                | 47 W         | 0.44        | 0.25 | 0.22 | 0.19 | 0.15 | 0.11 |
|      | 1000               | 74 W         | 0.69        | 0.40 | 0.35 | 0.30 | 0.23 | 0.17 |

### Motion Sensor Default Settings


| Option                | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|-----------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| *PIR or PIRH          | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use with Inline Dusk to Dawn or timer


## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isfootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

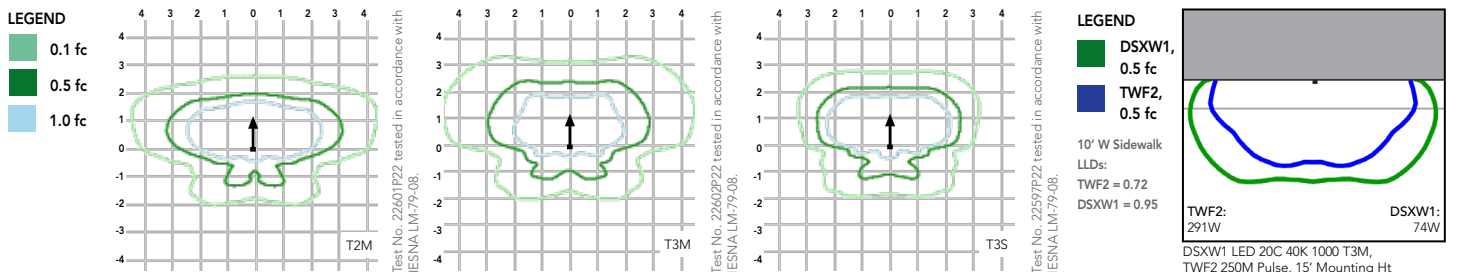

## Options and Accessories

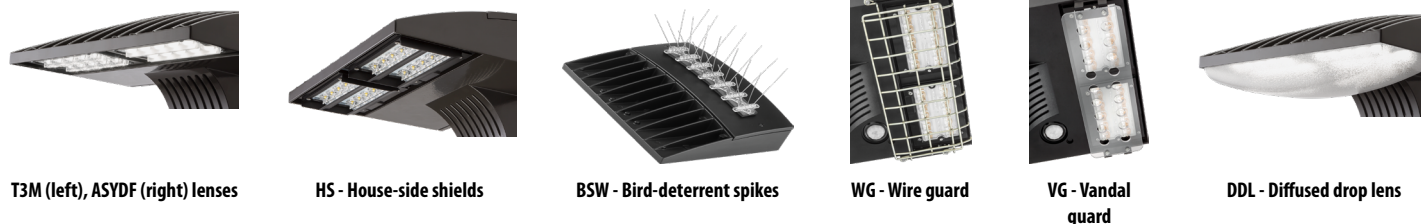

## FEATURES & SPECIFICATIONS

### INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

### CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

### ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

### INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

### LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/resources/terms-and-conditions](http://www.acuitybrands.com/resources/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





# D-Series Size 1 LED Wall Luminaire



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.


d#series

## Specifications Luminaire

|                |                   |                |                 |
|----------------|-------------------|----------------|-----------------|
| <b>Width:</b>  | 13-3/4" (34.9 cm) | <b>Weight:</b> | 12 lbs (5.4 kg) |
| <b>Depth:</b>  | 10" (25.4 cm)     |                |                 |
| <b>Height:</b> | 6-3/8" (16.2 cm)  |                |                 |

## Back Box (BBW, ELCW)

|                |                   |                     |                 |
|----------------|-------------------|---------------------|-----------------|
| <b>Width:</b>  | 13-3/4" (34.9 cm) | <b>BBW Weight:</b>  | 5 lbs (2.3 kg)  |
| <b>Depth:</b>  | 4" (10.2 cm)      | <b>ELCW Weight:</b> | 10 lbs (4.5 kg) |
| <b>Height:</b> | 6-3/8" (16.2 cm)  |                     |                 |

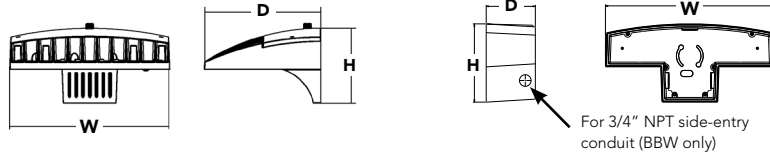

## Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

## Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DBBTD

| Series           | LEDs   | Drive Current  | Color temperature   | Distribution   | Voltage   | Mounting  | Control Options   |
|------------------|--|--|---|--|---|---|---|
| <b>DSXW1 LED</b> | <b>10C</b> 10 LEDs (one engine)<br><b>20C</b> 20 LEDs (two engines) <sup>1</sup> | 350 350 mA<br>530 530 mA<br><b>700</b> 700 mA<br>1000 1000 mA (1 A) <sup>1</sup> | 30K 3000 K<br>40K 4000 K<br><b>50K</b> 5000 K<br>AMBPC Amber phosphor converted | T2S Type II Short<br>T2M Type II Medium<br>T3S Type III Short<br><b>T3M</b> Type III Medium<br>T4M Type IV Medium<br>TFTM Forward Throw Medium | <b>MVOLT</b> <sup>2</sup><br>120 <sup>3</sup><br>208 <sup>3</sup><br>240 <sup>3</sup><br>277 <sup>3</sup><br>347 <sup>3,4</sup><br>480 <sup>3,4</sup> | <b>Shipped included</b><br>(blank) Surface mounting bracket<br><b>BBW</b> Surface-mounted back box (for conduit entry) <sup>5</sup> | <b>Shipped installed</b><br>PE Photoelectric cell, button type <sup>6</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)<br>PIR 180° motion/ambient light sensor, <15' mtg ht <sup>1,7</sup><br>PIRH 180° motion/ambient light sensor, 15-30' mtg ht <sup>1,7</sup><br>PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>1,7</sup><br>PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>1,7</sup><br>ELCW Emergency battery backup (includes external component enclosure), CA Title 20 Noncompliant <sup>8,9</sup> |

| Other Options   | Finish (required)   |
|---|---|
| <b>Shipped installed</b><br>SF Single fuse (120, 277 or 347V) <sup>3,10</sup><br>DF Double fuse (208, 240 or 480V) <sup>3,10</sup><br>HS House-side shield <sup>11</sup><br>SPD Separate surge protection <sup>12</sup> | <b>Shipped separately</b> <sup>11</sup><br>BSW Bird-deterrent spikes<br>WG Wire guard<br>VG Vandal guard<br>DDL Diffused drop lens  |
|   | DDBXD Dark bronze<br>DBLXD Black<br>DNAXD Natural aluminum<br>DWHXD White<br>DSSXD Sandstone<br>DBBTD Textured dark bronze<br>DBLBXD Textured black<br>DNATXD Textured natural aluminum<br>DWHGXD Textured white<br>DSSTXD Textured sandstone |

## Accessories

Ordered and shipped separately.

|           |  |
|-----------|--|
| DSXWHS U  | House-side shield (one per light engine) |
| DSXWBSW U | Bird-deterrent spikes                    |
| DSXW1WG U | Wire guard accessory                     |
| DSXW1VG U | Vandal guard accessory                   |

## NOTES

- 20C 1000 is not available with PIR, PIRH, PIR1FC3V or PIRH1FC3V.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Reference Motion Sensor table on page 3.
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at [www.lithonia.com](http://www.lithonia.com)
- Not available with SPD.
- Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- Not available with ELCW.





# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| LEDs      | Drive Current (mA) | System Watts | Dist. Type | 30K (3000 K, 70CRI) |   |   |     |       | 40K (4000 K, 70CRI) |   |   |     |       | 50K (5000 K, 70CRI) |   |   |     |       | AMBPC (Amber Phosphor Converted) |   |   |    |     |
|-----------|--------------------|--------------|------------|---------------------|---|---|-----|-------|---------------------|---|---|-----|-------|---------------------|---|---|-----|-------|----------------------------------|---|---|----|-----|
|           |                    |              |            | Lumens              | B | U | G   | LPW   | Lumens              | B | U | G   | LPW   | Lumens              | B | U | G   | LPW   | Lumens                           | B | U | G  | LPW |
| (10 LEDs) | 350mA              | 13W          | T2S        | 1,415               | 0 | 0 | 1   | 109   | 1,520               | 0 | 0 | 1   | 117   | 1,530               | 0 | 0 | 1   | 118   | 894                              | 0 | 0 | 1  | 69  |
|           |                    |              | T2M        | 1,349               | 0 | 0 | 1   | 104   | 1,448               | 0 | 0 | 1   | 111   | 1,458               | 0 | 0 | 1   | 112   | 852                              | 0 | 0 | 1  | 66  |
|           |                    |              | T3S        | 1,399               | 0 | 0 | 1   | 108   | 1,503               | 0 | 0 | 1   | 116   | 1,512               | 0 | 0 | 1   | 116   | 884                              | 0 | 0 | 1  | 68  |
|           |                    |              | T3M        | 1,385               | 0 | 0 | 1   | 107   | 1,488               | 0 | 0 | 1   | 114   | 1,497               | 0 | 0 | 1   | 115   | 876                              | 0 | 0 | 1  | 67  |
|           |                    |              | T4M        | 1,357               | 0 | 0 | 1   | 104   | 1,458               | 0 | 0 | 1   | 112   | 1,467               | 0 | 0 | 1   | 113   | 858                              | 0 | 0 | 1  | 66  |
|           |                    |              | TFTM       | 1,411               | 0 | 0 | 1   | 109   | 1,515               | 0 | 0 | 1   | 117   | 1,525               | 0 | 0 | 1   | 117   | 892                              | 0 | 0 | 1  | 69  |
|           | 530 mA             | 19W          | ASYDF      | 1,262               | 1 | 0 | 1   | 97    | 1,354               | 1 | 0 | 1   | 104   | 1,363               | 1 | 0 | 1   | 105   | 797                              | 0 | 0 | 1  | 61  |
|           |                    |              | T2S        | 2,053               | 1 | 0 | 1   | 108   | 2,205               | 1 | 0 | 1   | 116   | 2,220               | 1 | 0 | 1   | 117   | 1,264                            | 0 | 0 | 1  | 67  |
|           |                    |              | T2M        | 1,957               | 1 | 0 | 1   | 103   | 2,102               | 1 | 0 | 1   | 111   | 2,115               | 1 | 0 | 1   | 111   | 1,205                            | 0 | 0 | 1  | 63  |
|           |                    |              | T3S        | 2,031               | 1 | 0 | 1   | 107   | 2,181               | 1 | 0 | 1   | 115   | 2,194               | 1 | 0 | 1   | 115   | 1,250                            | 0 | 0 | 1  | 66  |
|           |                    |              | T3M        | 2,010               | 1 | 0 | 1   | 106   | 2,159               | 1 | 0 | 1   | 114   | 2,172               | 1 | 0 | 1   | 114   | 1,237                            | 0 | 0 | 1  | 65  |
|           |                    |              | T4M        | 1,970               | 1 | 0 | 1   | 104   | 2,115               | 1 | 0 | 1   | 111   | 2,129               | 1 | 0 | 1   | 112   | 1,212                            | 0 | 0 | 1  | 64  |
|           | 700 mA             | 26W          | TFTM       | 2,047               | 0 | 0 | 1   | 108   | 2,198               | 1 | 0 | 1   | 116   | 2,212               | 1 | 0 | 1   | 116   | 1,260                            | 0 | 0 | 1  | 66  |
|           |                    |              | ASYDF      | 1,831               | 1 | 0 | 1   | 96    | 1,966               | 1 | 0 | 1   | 103   | 1,978               | 1 | 0 | 1   | 104   | 1,127                            | 0 | 0 | 1  | 59  |
|           |                    |              | T2S        | 2,623               | 1 | 0 | 1   | 101   | 2,816               | 1 | 0 | 1   | 108   | 2,834               | 1 | 0 | 1   | 109   | 1,544                            | 0 | 0 | 1  | 59  |
|           |                    |              | T2M        | 2,499               | 1 | 0 | 1   | 96    | 2,684               | 1 | 0 | 1   | 103   | 2,701               | 1 | 0 | 1   | 104   | 1,472                            | 0 | 0 | 1  | 57  |
|           |                    |              | T3S        | 2,593               | 1 | 0 | 1   | 100   | 2,785               | 1 | 0 | 1   | 107   | 2,802               | 1 | 0 | 1   | 108   | 1,527                            | 0 | 0 | 1  | 59  |
|           |                    |              | T3M        | 2,567               | 1 | 0 | 1   | 99    | 2,757               | 1 | 0 | 1   | 106   | 2,774               | 1 | 0 | 1   | 107   | 1,512                            | 0 | 0 | 1  | 58  |
|           | 1000 mA            | 39W          | T4M        | 2,515               | 1 | 0 | 1   | 97    | 2,701               | 1 | 0 | 1   | 104   | 2,718               | 1 | 0 | 1   | 105   | 1,481                            | 0 | 0 | 1  | 57  |
|           |                    |              | TFTM       | 2,614               | 1 | 0 | 1   | 101   | 2,808               | 1 | 0 | 1   | 108   | 2,825               | 1 | 0 | 1   | 109   | 1,539                            | 0 | 0 | 1  | 59  |
|           |                    |              | ASYDF      | 2,337               | 1 | 0 | 1   | 90    | 2,510               | 1 | 0 | 1   | 97    | 2,525               | 1 | 0 | 1   | 97    | 1,376                            | 1 | 0 | 1  | 53  |
|           |                    |              | T2S        | 3,685               | 1 | 0 | 1   | 94    | 3,957               | 1 | 0 | 1   | 101   | 3,982               | 1 | 0 | 1   | 102   | 2,235                            | 1 | 0 | 1  | 57  |
|           |                    |              | T2M        | 3,512               | 1 | 0 | 1   | 90    | 3,771               | 1 | 0 | 1   | 97    | 3,794               | 1 | 0 | 1   | 97    | 2,130                            | 1 | 0 | 1  | 55  |
|           |                    |              | T3S        | 3,644               | 1 | 0 | 1   | 93    | 3,913               | 1 | 0 | 1   | 100   | 3,938               | 1 | 0 | 1   | 101   | 2,210                            | 1 | 0 | 1  | 57  |
| (20 LEDs) | 350mA              | 23W          | T3M        | 3,607               | 1 | 0 | 1   | 92    | 3,873               | 1 | 0 | 1   | 99    | 3,898               | 1 | 0 | 1   | 100   | 2,187                            | 1 | 0 | 1  | 56  |
|           |                    |              | T4M        | 3,534               | 1 | 0 | 2   | 91    | 3,796               | 1 | 0 | 2   | 97    | 3,819               | 1 | 0 | 2   | 98    | 2,143                            | 1 | 0 | 1  | 55  |
|           |                    |              | TFTM       | 3,673               | 1 | 0 | 1   | 94    | 3,945               | 1 | 0 | 1   | 101   | 3,969               | 1 | 0 | 1   | 102   | 2,228                            | 1 | 0 | 1  | 57  |
|           |                    |              | ASYDF      | 3,284               | 1 | 0 | 2   | 84    | 3,527               | 1 | 0 | 2   | 90    | 3,549               | 1 | 0 | 2   | 91    | 1,992                            | 1 | 0 | 1  | 51  |
|           |                    |              | T2S        | 2,820               | 1 | 0 | 1   | 123   | 3,028               | 1 | 0 | 1   | 132   | 3,047               | 1 | 0 | 1   | 132   | 1,777                            | 1 | 0 | 1  | 77  |
|           |                    |              | T2M        | 2,688               | 1 | 0 | 1   | 117   | 2,886               | 1 | 0 | 1   | 125   | 2,904               | 1 | 0 | 1   | 126   | 1,693                            | 1 | 0 | 1  | 74  |
|           | 530 mA             | 35W          | T3S        | 2,789               | 1 | 0 | 1   | 121   | 2,994               | 1 | 0 | 1   | 130   | 3,014               | 1 | 0 | 1   | 131   | 1,757                            | 0 | 0 | 1  | 76  |
|           |                    |              | T3M        | 2,760               | 1 | 0 | 1   | 120   | 2,965               | 1 | 0 | 1   | 129   | 2,983               | 1 | 0 | 1   | 130   | 1,739                            | 1 | 0 | 1  | 76  |
|           |                    |              | T4M        | 2,704               | 1 | 0 | 1   | 118   | 2,905               | 1 | 0 | 1   | 126   | 2,922               | 1 | 0 | 1   | 127   | 1,704                            | 1 | 0 | 1  | 74  |
|           |                    |              | TFTM       | 2,811               | 1 | 0 | 1   | 122   | 3,019               | 1 | 0 | 1   | 131   | 3,038               | 1 | 0 | 1   | 132   | 1,771                            | 0 | 0 | 1  | 77  |
|           |                    |              | ASYDF      | 2,514               | 1 | 0 | 1   | 109   | 2,699               | 1 | 0 | 1   | 117   | 2,716               | 1 | 0 | 1   | 118   | 1,584                            | 1 | 0 | 1  | 69  |
|           |                    |              | T2S        | 4,079               | 1 | 0 | 1   | 117   | 4,380               | 1 | 0 | 1   | 125   | 4,407               | 1 | 0 | 1   | 126   | 2,504                            | 1 | 0 | 1  | 72  |
|           | 700 mA             | 46W          | T2M        | 3,887               | 1 | 0 | 1   | 111   | 4,174               | 1 | 0 | 1   | 119   | 4,201               | 1 | 0 | 1   | 120   | 2,387                            | 1 | 0 | 1  | 68  |
|           |                    |              | T3S        | 4,033               | 1 | 0 | 1   | 115   | 4,331               | 1 | 0 | 1   | 124   | 4,359               | 1 | 0 | 1   | 125   | 2,477                            | 1 | 0 | 1  | 71  |
|           |                    |              | T3M        | 3,993               | 1 | 0 | 2   | 114   | 4,288               | 1 | 0 | 2   | 123   | 4,315               | 1 | 0 | 2   | 123   | 2,451                            | 1 | 0 | 1  | 70  |
|           |                    |              | T4M        | 3,912               | 1 | 0 | 2   | 112   | 4,201               | 1 | 0 | 2   | 120   | 4,227               | 1 | 0 | 2   | 121   | 2,402                            | 1 | 0 | 1  | 69  |
|           |                    |              | TFTM       | 4,066               | 1 | 0 | 2   | 116   | 4,366               | 1 | 0 | 2   | 125   | 4,394               | 1 | 0 | 2   | 126   | 2,496                            | 1 | 0 | 1  | 71  |
|           |                    |              | ASYDF      | 3,636               | 1 | 0 | 2   | 104   | 3,904               | 1 | 0 | 2   | 112   | 3,928               | 1 | 0 | 2   | 112   | 2,232                            | 1 | 0 | 1  | 64  |
|           | 1000 mA            | 73W          | T2S        | 5,188               | 1 | 0 | 1   | 113   | 5,572               | 1 | 0 | 1   | 121   | 5,607               | 1 | 0 | 1   | 122   | 3,065                            | 1 | 0 | 1  | 67  |
|           |                    |              | T2M        | 4,945               | 1 | 0 | 2   | 108   | 5,309               | 1 | 0 | 2   | 115   | 5,343               | 1 | 0 | 2   | 116   | 2,921                            | 1 | 0 | 1  | 64  |
|           |                    |              | T3S        | 5,131               | 1 | 0 | 2   | 112   | 5,510               | 1 | 0 | 2   | 120   | 5,544               | 1 | 0 | 2   | 121   | 3,031                            | 1 | 0 | 1  | 66  |
|           |                    |              | T3M        | 5,078               | 1 | 0 | 2   | 110   | 5,454               | 1 | 0 | 2   | 119   | 5,487               | 1 | 0 | 2   | 119   | 3,000                            | 1 | 0 | 1  | 65  |
|           |                    |              | T4M        | 4,975               | 1 | 0 | 2   | 108   | 5,343               | 1 | 0 | 2   | 116   | 5,376               | 1 | 0 | 2   | 117   | 2,939                            | 1 | 0 | 1  | 64  |
|           |                    |              | TFTM       | 5,172               | 1 | 0 | 2   | 112   | 5,554               | 1 | 0 | 2   | 121   | 5,589               | 1 | 0 | 2   | 122   | 3,055                            | 1 | 0 | 1  | 66  |
| 1000 mA   | 73W                | ASYDF        | 4,624      | 1                   | 0 | 2 | 101 | 4,965 | 1                   | 0 | 2 | 108 | 4,996 | 1                   | 0 | 2 | 109 | 2,732 | 1                                | 0 | 1 | 59 |     |
|           |                    | T2S          | 7,204      | 1                   | 0 | 2 | 99  | 7,736 | 2                   | 0 | 2 | 106 | 7,784 | 2                   | 0 | 2 | 107 | 4,429 | 1                                | 0 | 1 | 61 |     |
|           |                    | T2M          | 6,865      | 1                   | 0 | 2 | 94  | 7,373 | 2                   | 0 | 2 | 101 | 7,419 | 2                   | 0 | 2 | 102 | 4,221 | 1                                | 0 | 1 | 58 |     |
|           |                    | T3S          | 7,125      | 1                   | 0 | 2 | 98  | 7,651 | 1                   | 0 | 2 | 105 | 7,698 | 1                   | 0 | 2 | 105 | 4,380 | 1                                | 0 | 1 | 60 |     |
|           |                    | T3M          | 7,052      | 1                   | 0 | 2 | 97  | 7,573 | 2                   | 0 | 2 | 104 | 7,620 | 2                   | 0 | 2 | 104 | 4,335 | 1                                | 0 | 2 | 59 |     |
|           |                    | T4M          | 6,909      | 1                   | 0 | 2 | 95  | 7,420 | 1                   | 0 | 2 | 102 | 7,466 | 1                   | 0 | 2 | 102 | 4,248 | 1                                | 0 | 2 | 58 |     |
| 1000 mA   | 73W                | TFTM         | 7,182      | 1                   | 0 | 2 | 98  | 7,712 | 1                   | 0 | 2 | 106 | 7,761 | 1                   | 0 | 2 | 106 | 4,415 | 1                                | 0 | 2 | 60 |     |
|           |                    | ASYDF        | 6,421      | 2                   | 0 | 2 | 88  | 6,896 | 2                   | 0 | 3 | 94  | 6,938 | 2                   | 0 | 3 | 95  | 3,947 | 1                                | 0 | 2 | 54 |     |



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient |       | Lumen Multiplier |
|---------|-------|------------------|
| 0°C     | 32°F  | 1.02             |
| 10°C    | 50°F  | 1.01             |
| 20°C    | 68°F  | 1.00             |
| 25°C    | 77°F  | 1.00             |
| 30°C    | 86°F  | 1.00             |
| 40°C    | 104°F | 0.98             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the DSXW1 LED 20C 1000 platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours          | 0   | 25,000 | 50,000 | 100,000 |
|--------------------------|-----|--------|--------|---------|
| Lumen Maintenance Factor | 1.0 | 0.95   | 0.93   | 0.88    |

### Electrical Load

| LEDs | Drive Current (mA) | System Watts | Current (A) |      |      |      |      |      |
|------|--------------------|--------------|-------------|------|------|------|------|------|
|      |                    |              | 120V        | 208V | 240V | 277V | 347V | 480V |
| 10C  | 350                | 14 W         | 0.13        | 0.07 | 0.06 | 0.06 | -    | -    |
|      | 530                | 20 W         | 0.19        | 0.11 | 0.09 | 0.08 | -    | -    |
|      | 700                | 27 W         | 0.25        | 0.14 | 0.13 | 0.11 | -    | -    |
|      | 1000               | 40 W         | 0.37        | 0.21 | 0.19 | 0.16 | -    | -    |
| 20C  | 350                | 24 W         | 0.23        | 0.13 | 0.12 | 0.10 | -    | -    |
|      | 530                | 36 W         | 0.33        | 0.19 | 0.17 | 0.14 | -    | -    |
|      | 700                | 47 W         | 0.44        | 0.25 | 0.22 | 0.19 | 0.15 | 0.11 |
|      | 1000               | 74 W         | 0.69        | 0.40 | 0.35 | 0.30 | 0.23 | 0.17 |

### Motion Sensor Default Settings


| Option                | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|-----------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| *PIR or PIRH          | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use with Inline Dusk to Dawn or timer


## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isfootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

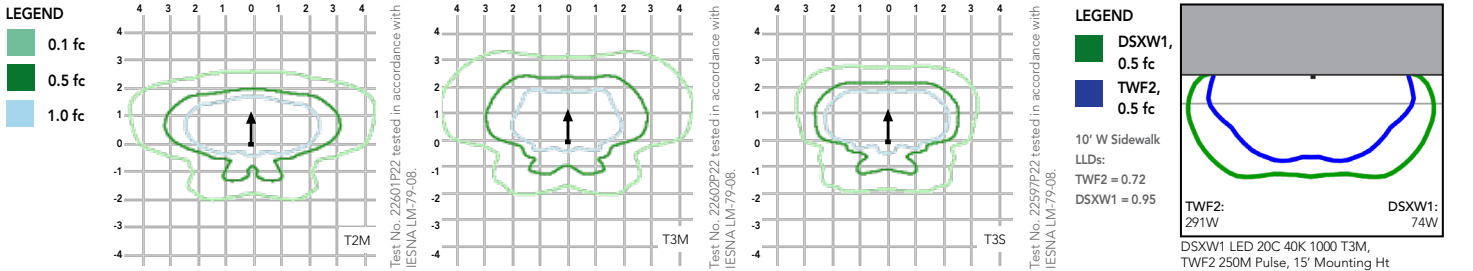

## Options and Accessories

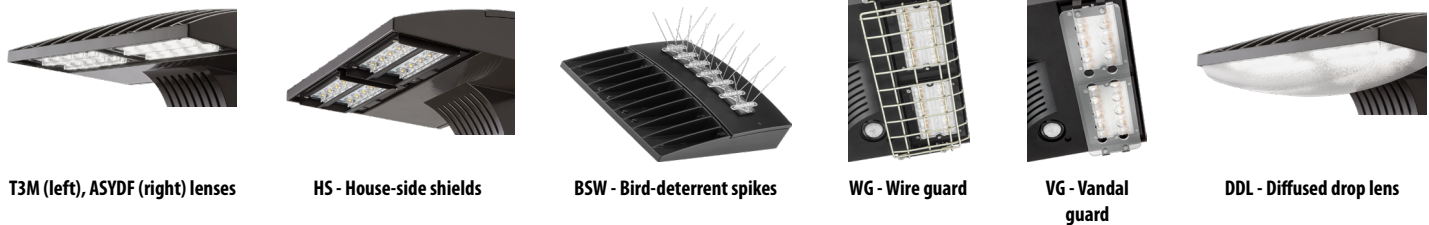

## FEATURES & SPECIFICATIONS

### INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

### CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

### ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

### INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

### LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/resources/terms-and-conditions](http://www.acuitybrands.com/resources/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





# D-Series Size 1 LED Wall Luminaire



d#series

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |


Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications Luminaire

|                |                      |                |                    |
|----------------|----------------------|----------------|--------------------|
| <b>Width:</b>  | 13-3/4"<br>(34.9 cm) | <b>Weight:</b> | 12 lbs<br>(5.4 kg) |
| <b>Depth:</b>  | 10"<br>(25.4 cm)     |                |                    |
| <b>Height:</b> | 6-3/8"<br>(16.2 cm)  |                |                    |

## Back Box (BBW, ELCW)

|                |                      |                     |                    |
|----------------|----------------------|---------------------|--------------------|
| <b>Width:</b>  | 13-3/4"<br>(34.9 cm) | <b>BBW Weight:</b>  | 5 lbs<br>(2.3 kg)  |
| <b>Depth:</b>  | 4"<br>(10.2 cm)      | <b>ELCW Weight:</b> | 10 lbs<br>(4.5 kg) |
| <b>Height:</b> | 6-3/8"<br>(16.2 cm)  |                     |                    |

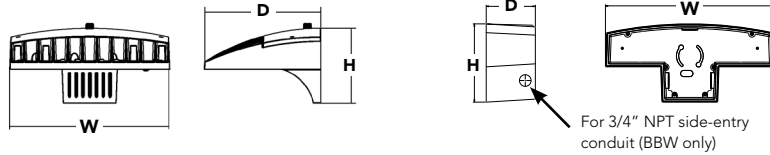

## Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

## Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DBBTD

| Series           | LEDs   | Drive Current   | Color temperature  | Distribution  | Voltage  | Mounting   | Control Options  |
|------------------|--|---|--|---|--|--|--|
| <b>DSXW1 LED</b> |  |   |  |   |  |  |  |
| <b>DSXW1 LED</b> | 10C 10 LEDs (one engine)<br>20C 20 LEDs (two engines) <sup>1</sup> | 350 350 mA<br>530 530 mA<br>700 700 mA<br>1000 1000 mA (1 A) <sup>1</sup> | 30K 3000 K<br>40K 4000 K<br>50K 5000 K<br>AMBPC Amber phosphor converted | T2S Type II Short<br>T2M Type II Medium<br>T3S Type III Short<br>T3M Type III Medium<br>T4M Type IV Medium<br>TFTM Forward Throw Medium | MVOLT <sup>2</sup><br>120 <sup>3</sup><br>208 <sup>3</sup><br>240 <sup>3</sup><br>277 <sup>3</sup><br>347 <sup>3,4</sup><br>480 <sup>3,4</sup> | Shipped included (blank) Surface mounting bracket<br>BBW Surface-mounted back box (for conduit entry) <sup>5</sup> | Shipped installed<br>PE Photoelectric cell, button type <sup>6</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)<br>PIR 180° motion/ambient light sensor, <15' mtg ht <sup>1,7</sup><br>PIRH 180° motion/ambient light sensor, 15-30' mtg ht <sup>1,7</sup><br>PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>1,7</sup><br>PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>1,7</sup><br>ELCW Emergency battery backup (includes external component enclosure), CA Title 20 Noncompliant <sup>8,9</sup> |

| Other Options   | Finish (required)   |
|---|---|
| <b>Shipped installed</b><br>SF Single fuse (120, 277 or 347V) <sup>3,10</sup><br>DF Double fuse (208, 240 or 480V) <sup>3,10</sup><br>HS House-side shield <sup>11</sup><br>SPD Separate surge protection <sup>12</sup> | DDBXD Dark bronze<br>DBLXD Black<br>DNAXD Natural aluminum<br>DWHXD White<br>DSSXD Sandstone<br>DBBTD Textured dark bronze<br>DBLBXD Textured black<br>DNATXD Textured natural aluminum<br>DWHGXD Textured white<br>DSSTXD Textured sandstone |

## Accessories

Ordered and shipped separately.

|           |  |
|-----------|--|
| DSXWHS U  | House-side shield (one per light engine) |
| DSXWBSW U | Bird-deterrent spikes                    |
| DSXW1WG U | Wire guard accessory                     |
| DSXW1VG U | Vandal guard accessory                   |

## NOTES

- 20C 1000 is not available with PIR, PIRH, PIR1FC3V or PIRH1FC3V.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Reference Motion Sensor table on page 3.
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at [www.lithonia.com](http://www.lithonia.com)
- Not available with SPD.
- Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- Not available with ELCW.



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| LEDs      | Drive Current (mA) | System Watts | Dist. Type | 30K (3000 K, 70CRI) |    |       |       |       | 40K (4000 K, 70CRI) |    |       |       |       | 50K (5000 K, 70CRI) |    |       |       |       | AMBPC (Amber Phosphor Converted) |    |    |    |     |
|-----------|--------------------|--------------|------------|---------------------|----|-------|-------|-------|---------------------|----|-------|-------|-------|---------------------|----|-------|-------|-------|----------------------------------|----|----|----|-----|
|           |                    |              |            | Lumens              | B  | U     | G     | LPW   | Lumens              | B  | U     | G     | LPW   | Lumens              | B  | U     | G     | LPW   | Lumens                           | B  | U  | G  | LPW |
| (10 LEDs) | 350mA              | 13W          | T2S        | 1,415               | 0  | 0     | 1     | 109   | 1,520               | 0  | 0     | 1     | 117   | 1,530               | 0  | 0     | 1     | 118   | 894                              | 0  | 0  | 1  | 69  |
|           |                    |              | T2M        | 1,349               | 0  | 0     | 1     | 104   | 1,448               | 0  | 0     | 1     | 111   | 1,458               | 0  | 0     | 1     | 112   | 852                              | 0  | 0  | 1  | 66  |
|           |                    |              | T3S        | 1,399               | 0  | 0     | 1     | 108   | 1,503               | 0  | 0     | 1     | 116   | 1,512               | 0  | 0     | 1     | 116   | 884                              | 0  | 0  | 1  | 68  |
|           |                    |              | T3M        | 1,385               | 0  | 0     | 1     | 107   | 1,488               | 0  | 0     | 1     | 114   | 1,497               | 0  | 0     | 1     | 115   | 876                              | 0  | 0  | 1  | 67  |
|           |                    |              | T4M        | 1,357               | 0  | 0     | 1     | 104   | 1,458               | 0  | 0     | 1     | 112   | 1,467               | 0  | 0     | 1     | 113   | 858                              | 0  | 0  | 1  | 66  |
|           |                    |              | TFTM       | 1,411               | 0  | 0     | 1     | 109   | 1,515               | 0  | 0     | 1     | 117   | 1,525               | 0  | 0     | 1     | 117   | 892                              | 0  | 0  | 1  | 69  |
|           | ASDYF              | 1,262        | 1          | 0                   | 1  | 97    | 1,354 | 1     | 0                   | 1  | 104   | 1,363 | 1     | 0                   | 1  | 105   | 797   | 0     | 0                                | 1  | 61 |    |     |
|           | 530 mA             | 19W          | T2S        | 2,053               | 1  | 0     | 1     | 108   | 2,205               | 1  | 0     | 1     | 116   | 2,220               | 1  | 0     | 1     | 117   | 1,264                            | 0  | 0  | 1  | 67  |
|           |                    |              | T2M        | 1,957               | 1  | 0     | 1     | 103   | 2,102               | 1  | 0     | 1     | 111   | 2,115               | 1  | 0     | 1     | 111   | 1,205                            | 0  | 0  | 1  | 63  |
|           |                    |              | T3S        | 2,031               | 1  | 0     | 1     | 107   | 2,181               | 1  | 0     | 1     | 115   | 2,194               | 1  | 0     | 1     | 115   | 1,250                            | 0  | 0  | 1  | 66  |
|           |                    |              | T3M        | 2,010               | 1  | 0     | 1     | 106   | 2,159               | 1  | 0     | 1     | 114   | 2,172               | 1  | 0     | 1     | 114   | 1,237                            | 0  | 0  | 1  | 65  |
|           |                    |              | T4M        | 1,970               | 1  | 0     | 1     | 104   | 2,115               | 1  | 0     | 1     | 111   | 2,129               | 1  | 0     | 1     | 112   | 1,212                            | 0  | 0  | 1  | 64  |
|           |                    |              | TFTM       | 2,047               | 0  | 0     | 1     | 108   | 2,198               | 1  | 0     | 1     | 116   | 2,212               | 1  | 0     | 1     | 116   | 1,260                            | 0  | 0  | 1  | 66  |
|           | ASDYF              | 1,831        | 1          | 0                   | 1  | 96    | 1,966 | 1     | 0                   | 1  | 103   | 1,978 | 1     | 0                   | 1  | 104   | 1,127 | 0     | 0                                | 1  | 59 |    |     |
|           | 700 mA             | 26W          | T2S        | 2,623               | 1  | 0     | 1     | 101   | 2,816               | 1  | 0     | 1     | 108   | 2,834               | 1  | 0     | 1     | 109   | 1,544                            | 0  | 0  | 1  | 59  |
|           |                    |              | T2M        | 2,499               | 1  | 0     | 1     | 96    | 2,684               | 1  | 0     | 1     | 103   | 2,701               | 1  | 0     | 1     | 104   | 1,472                            | 0  | 0  | 1  | 57  |
|           |                    |              | T3S        | 2,593               | 1  | 0     | 1     | 100   | 2,785               | 1  | 0     | 1     | 107   | 2,802               | 1  | 0     | 1     | 108   | 1,527                            | 0  | 0  | 1  | 59  |
|           |                    |              | T3M        | 2,567               | 1  | 0     | 1     | 99    | 2,757               | 1  | 0     | 1     | 106   | 2,774               | 1  | 0     | 1     | 107   | 1,512                            | 0  | 0  | 1  | 58  |
|           |                    |              | T4M        | 2,515               | 1  | 0     | 1     | 97    | 2,701               | 1  | 0     | 1     | 104   | 2,718               | 1  | 0     | 1     | 105   | 1,481                            | 0  | 0  | 1  | 57  |
|           |                    |              | TFTM       | 2,614               | 1  | 0     | 1     | 101   | 2,808               | 1  | 0     | 1     | 108   | 2,825               | 1  | 0     | 1     | 109   | 1,539                            | 0  | 0  | 1  | 59  |
|           | ASDYF              | 2,337        | 1          | 0                   | 1  | 90    | 2,510 | 1     | 0                   | 1  | 97    | 2,525 | 1     | 0                   | 1  | 97    | 1,376 | 1     | 0                                | 1  | 53 |    |     |
|           | 1000 mA            | 39W          | T2S        | 3,685               | 1  | 0     | 1     | 94    | 3,957               | 1  | 0     | 1     | 101   | 3,982               | 1  | 0     | 1     | 102   | 2,235                            | 1  | 0  | 1  | 57  |
|           |                    |              | T2M        | 3,512               | 1  | 0     | 1     | 90    | 3,771               | 1  | 0     | 1     | 97    | 3,794               | 1  | 0     | 1     | 97    | 2,130                            | 1  | 0  | 1  | 55  |
|           |                    |              | T3S        | 3,644               | 1  | 0     | 1     | 93    | 3,913               | 1  | 0     | 1     | 100   | 3,938               | 1  | 0     | 1     | 101   | 2,210                            | 1  | 0  | 1  | 57  |
| T3M       |                    |              | 3,607      | 1                   | 0  | 1     | 92    | 3,873 | 1                   | 0  | 1     | 99    | 3,898 | 1                   | 0  | 1     | 100   | 2,187 | 1                                | 0  | 1  | 56 |     |
| T4M       |                    |              | 3,534      | 1                   | 0  | 2     | 91    | 3,796 | 1                   | 0  | 2     | 97    | 3,819 | 1                   | 0  | 2     | 98    | 2,143 | 1                                | 0  | 1  | 55 |     |
| TFTM      |                    |              | 3,673      | 1                   | 0  | 1     | 94    | 3,945 | 1                   | 0  | 1     | 101   | 3,969 | 1                   | 0  | 1     | 102   | 2,228 | 1                                | 0  | 1  | 57 |     |
| ASDYF     | 3,284              | 1            | 0          | 2                   | 84 | 3,527 | 1     | 0     | 2                   | 90 | 3,549 | 1     | 0     | 2                   | 91 | 1,992 | 1     | 0     | 1                                | 51 |    |    |     |
| (20 LEDs) | 350mA              | 23W          | T2S        | 2,820               | 1  | 0     | 1     | 123   | 3,028               | 1  | 0     | 1     | 132   | 3,047               | 1  | 0     | 1     | 132   | 1,777                            | 1  | 0  | 1  | 77  |
|           |                    |              | T2M        | 2,688               | 1  | 0     | 1     | 117   | 2,886               | 1  | 0     | 1     | 125   | 2,904               | 1  | 0     | 1     | 126   | 1,693                            | 1  | 0  | 1  | 74  |
|           |                    |              | T3S        | 2,789               | 1  | 0     | 1     | 121   | 2,994               | 1  | 0     | 1     | 130   | 3,014               | 1  | 0     | 1     | 131   | 1,757                            | 0  | 0  | 1  | 76  |
|           |                    |              | T3M        | 2,760               | 1  | 0     | 1     | 120   | 2,965               | 1  | 0     | 1     | 129   | 2,983               | 1  | 0     | 1     | 130   | 1,739                            | 1  | 0  | 1  | 76  |
|           |                    |              | T4M        | 2,704               | 1  | 0     | 1     | 118   | 2,905               | 1  | 0     | 1     | 126   | 2,922               | 1  | 0     | 1     | 127   | 1,704                            | 1  | 0  | 1  | 74  |
|           |                    |              | TFTM       | 2,811               | 1  | 0     | 1     | 122   | 3,019               | 1  | 0     | 1     | 131   | 3,038               | 1  | 0     | 1     | 132   | 1,771                            | 0  | 0  | 1  | 77  |
|           | ASDYF              | 2,514        | 1          | 0                   | 1  | 109   | 2,699 | 1     | 0                   | 1  | 117   | 2,716 | 1     | 0                   | 1  | 118   | 1,584 | 1     | 0                                | 1  | 69 |    |     |
|           | 530 mA             | 35W          | T2S        | 4,079               | 1  | 0     | 1     | 117   | 4,380               | 1  | 0     | 1     | 125   | 4,407               | 1  | 0     | 1     | 126   | 2,504                            | 1  | 0  | 1  | 72  |
|           |                    |              | T2M        | 3,887               | 1  | 0     | 1     | 111   | 4,174               | 1  | 0     | 1     | 119   | 4,201               | 1  | 0     | 1     | 120   | 2,387                            | 1  | 0  | 1  | 68  |
|           |                    |              | T3S        | 4,033               | 1  | 0     | 1     | 115   | 4,331               | 1  | 0     | 1     | 124   | 4,359               | 1  | 0     | 1     | 125   | 2,477                            | 1  | 0  | 1  | 71  |
|           |                    |              | T3M        | 3,993               | 1  | 0     | 2     | 114   | 4,288               | 1  | 0     | 2     | 123   | 4,315               | 1  | 0     | 2     | 123   | 2,451                            | 1  | 0  | 1  | 70  |
|           |                    |              | T4M        | 3,912               | 1  | 0     | 2     | 112   | 4,201               | 1  | 0     | 2     | 120   | 4,227               | 1  | 0     | 2     | 121   | 2,402                            | 1  | 0  | 1  | 69  |
|           |                    |              | TFTM       | 4,066               | 1  | 0     | 2     | 116   | 4,366               | 1  | 0     | 2     | 125   | 4,394               | 1  | 0     | 2     | 126   | 2,496                            | 1  | 0  | 1  | 71  |
|           | ASDYF              | 3,636        | 1          | 0                   | 2  | 104   | 3,904 | 1     | 0                   | 2  | 112   | 3,928 | 1     | 0                   | 2  | 112   | 2,232 | 1     | 0                                | 1  | 64 |    |     |
|           | 700 mA             | 46W          | T2S        | 5,188               | 1  | 0     | 1     | 113   | 5,572               | 1  | 0     | 1     | 121   | 5,607               | 1  | 0     | 1     | 122   | 3,065                            | 1  | 0  | 1  | 67  |
|           |                    |              | T2M        | 4,945               | 1  | 0     | 2     | 108   | 5,309               | 1  | 0     | 2     | 115   | 5,343               | 1  | 0     | 2     | 116   | 2,921                            | 1  | 0  | 1  | 64  |
|           |                    |              | T3S        | 5,131               | 1  | 0     | 2     | 112   | 5,510               | 1  | 0     | 2     | 120   | 5,544               | 1  | 0     | 2     | 121   | 3,031                            | 1  | 0  | 1  | 66  |
|           |                    |              | T3M        | 5,078               | 1  | 0     | 2     | 110   | 5,454               | 1  | 0     | 2     | 119   | 5,487               | 1  | 0     | 2     | 119   | 3,000                            | 1  | 0  | 1  | 65  |
|           |                    |              | T4M        | 4,975               | 1  | 0     | 2     | 108   | 5,343               | 1  | 0     | 2     | 116   | 5,376               | 1  | 0     | 2     | 117   | 2,939                            | 1  | 0  | 1  | 64  |
|           |                    |              | TFTM       | 5,172               | 1  | 0     | 2     | 112   | 5,554               | 1  | 0     | 2     | 121   | 5,589               | 1  | 0     | 2     | 122   | 3,055                            | 1  | 0  | 1  | 66  |
|           | ASDYF              | 4,624        | 1          | 0                   | 2  | 101   | 4,965 | 1     | 0                   | 2  | 108   | 4,996 | 1     | 0                   | 2  | 109   | 2,732 | 1     | 0                                | 1  | 59 |    |     |
|           | 1000 mA            | 73W          | T2S        | 7,204               | 1  | 0     | 2     | 99    | 7,736               | 2  | 0     | 2     | 106   | 7,784               | 2  | 0     | 2     | 107   | 4,429                            | 1  | 0  | 1  | 61  |
|           |                    |              | T2M        | 6,865               | 1  | 0     | 2     | 94    | 7,373               | 2  | 0     | 2     | 101   | 7,419               | 2  | 0     | 2     | 102   | 4,221                            | 1  | 0  | 1  | 58  |
|           |                    |              | T3S        | 7,125               | 1  | 0     | 2     | 98    | 7,651               | 1  | 0     | 2     | 105   | 7,698               | 1  | 0     | 2     | 105   | 4,380                            | 1  | 0  | 1  | 60  |
| T3M       |                    |              | 7,052      | 1                   | 0  | 2     | 97    | 7,573 | 2                   | 0  | 2     | 104   | 7,620 | 2                   | 0  | 2     | 104   | 4,335 | 1                                | 0  | 2  | 59 |     |
| T4M       |                    |              | 6,909      | 1                   | 0  | 2     | 95    | 7,420 | 1                   | 0  | 2     | 102   | 7,466 | 1                   | 0  | 2     | 102   | 4,248 | 1                                | 0  | 2  | 58 |     |
| TFTM      |                    |              | 7,182      | 1                   | 0  | 2     | 98    | 7,712 | 1                   | 0  | 2     | 106   | 7,761 | 1                   | 0  | 2     | 106   | 4,415 | 1                                | 0  | 2  | 60 |     |
| ASDYF     | 6,421              | 2            | 0          | 2                   | 88 | 6,896 | 2     | 0     | 3                   | 94 | 6,938 | 2     | 0     | 3                   | 95 | 3,947 | 1     | 0     | 2                                | 54 |    |    |     |

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient |       | Lumen Multiplier |
|---------|-------|------------------|
| 0°C     | 32°F  | 1.02             |
| 10°C    | 50°F  | 1.01             |
| 20°C    | 68°F  | 1.00             |
| 25°C    | 77°F  | 1.00             |
| 30°C    | 86°F  | 1.00             |
| 40°C    | 104°F | 0.98             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the DSXW1 LED 20C 1000 platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours          | 0   | 25,000 | 50,000 | 100,000 |
|--------------------------|-----|--------|--------|---------|
| Lumen Maintenance Factor | 1.0 | 0.95   | 0.93   | 0.88    |

### Electrical Load

| LEDs | Drive Current (mA) | System Watts | Current (A) |      |      |      |      |      |
|------|--------------------|--------------|-------------|------|------|------|------|------|
|      |                    |              | 120V        | 208V | 240V | 277V | 347V | 480V |
| 10C  | 350                | 14 W         | 0.13        | 0.07 | 0.06 | 0.06 | -    | -    |
|      | 530                | 20 W         | 0.19        | 0.11 | 0.09 | 0.08 | -    | -    |
|      | 700                | 27 W         | 0.25        | 0.14 | 0.13 | 0.11 | -    | -    |
|      | 1000               | 40 W         | 0.37        | 0.21 | 0.19 | 0.16 | -    | -    |
| 20C  | 350                | 24 W         | 0.23        | 0.13 | 0.12 | 0.10 | -    | -    |
|      | 530                | 36 W         | 0.33        | 0.19 | 0.17 | 0.14 | -    | -    |
|      | 700                | 47 W         | 0.44        | 0.25 | 0.22 | 0.19 | 0.15 | 0.11 |
|      | 1000               | 74 W         | 0.69        | 0.40 | 0.35 | 0.30 | 0.23 | 0.17 |

### Motion Sensor Default Settings


| Option                | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|-----------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| *PIR or PIRH          | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use with Inline Dusk to Dawn or timer

## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isfootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

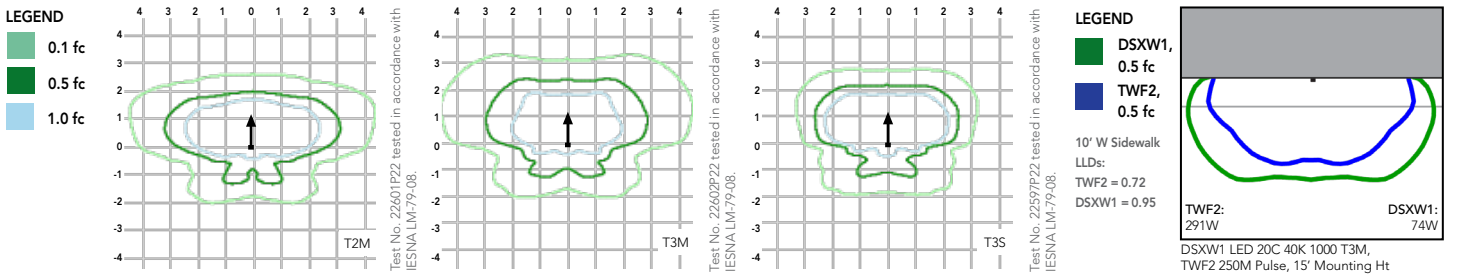

## Options and Accessories



T3M (left), ASYDF (right) lenses



HS - House-side shields



BSW - Bird-deterrent spikes



WG - Wire guard



VG - Vandal guard



DDL - Diffused drop lens

## FEATURES & SPECIFICATIONS

### INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

### CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

### ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

### INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

### LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/resources/terms-and-conditions](http://www.acuitybrands.com/resources/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





# D-Series Size 1 LED Wall Luminaire



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.


d#series

## Specifications Luminaire

|                |                      |                |                    |
|----------------|----------------------|----------------|--------------------|
| <b>Width:</b>  | 13-3/4"<br>(34.9 cm) | <b>Weight:</b> | 12 lbs<br>(5.4 kg) |
| <b>Depth:</b>  | 10"<br>(25.4 cm)     |                |                    |
| <b>Height:</b> | 6-3/8"<br>(16.2 cm)  |                |                    |

## Back Box (BBW, ELCW)

|                |                      |                     |                    |
|----------------|----------------------|---------------------|--------------------|
| <b>Width:</b>  | 13-3/4"<br>(34.9 cm) | <b>BBW Weight:</b>  | 5 lbs<br>(2.3 kg)  |
| <b>Depth:</b>  | 4"<br>(10.2 cm)      | <b>ELCW Weight:</b> | 10 lbs<br>(4.5 kg) |
| <b>Height:</b> | 6-3/8"<br>(16.2 cm)  |                     |                    |

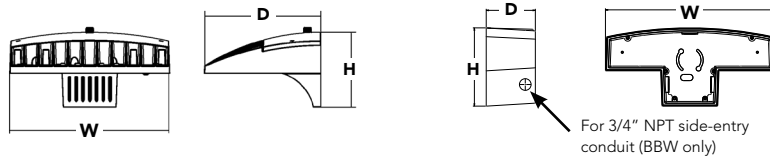

## Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

## Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DBBTD

| Series           | LEDs   | Drive Current  | Color temperature   | Distribution   | Voltage   | Mounting  | Control Options   |
|------------------|--|--|---|--|---|---|---|
| <b>DSXW1 LED</b> |  |  |   |  |   |   |   |
| <b>DSXW1 LED</b> | <b>10C</b> 10 LEDs (one engine)<br><b>20C</b> 20 LEDs (two engines) <sup>1</sup> | 350 350 mA<br>530 530 mA<br><b>700</b> 700 mA<br>1000 1000 mA (1 A) <sup>1</sup> | 30K 3000 K<br>40K 4000 K<br><b>50K</b> 5000 K<br>AMBPC Amber phosphor converted | T2S Type II Short<br>T2M Type II Medium<br>T3S Type III Short<br>T3M Type III Medium<br><b>T4M</b> Type IV Medium<br>TFTM Forward Throw Medium | <b>MVOLT</b> <sup>2</sup><br>120 <sup>3</sup><br>208 <sup>3</sup><br>240 <sup>3</sup><br>277 <sup>3</sup><br>347 <sup>3,4</sup><br>480 <sup>3,4</sup> | <b>Shipped included</b><br>(blank) Surface mounting bracket<br><b>BBW</b> Surface-mounted back box (for conduit entry) <sup>5</sup> | <b>Shipped installed</b><br>PE Photoelectric cell, button type <sup>6</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)<br>PIR 180° motion/ambient light sensor, <15' mtg ht <sup>1,7</sup><br>PIRH 180° motion/ambient light sensor, 15-30' mtg ht <sup>1,7</sup><br>PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>1,7</sup><br>PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>1,7</sup><br>ELCW Emergency battery backup (includes external component enclosure), CA Title 20 Noncompliant <sup>8,9</sup> |

### Other Options

### Finish (required)

#### Shipped installed

|     |  |
|-----|--|
| SF  | Single fuse (120, 277 or 347V) <sup>3,10</sup> |
| DF  | Double fuse (208, 240 or 480V) <sup>3,10</sup> |
| HS  | House-side shield <sup>11</sup>                |
| SPD | Separate surge protection <sup>12</sup>        |

#### Shipped separately<sup>11</sup>

|     |                       |
|-----|-----------------------|
| BSW | Bird-deterrent spikes |
| WG  | Wire guard            |
| VG  | Vandal guard          |
| DDL | Diffused drop lens    |

|       |                  |        |                           |
|-------|------------------|--------|---------------------------|
| DDBXD | Dark bronze      | DSSXD  | Sandstone                 |
| DBLXD | Black            | DBBTD  | Textured dark bronze      |
| DNAXD | Natural aluminum | DBLBXD | Textured black            |
| DWHXD | White            | DNATXD | Textured natural aluminum |

|        |                    |
|--------|--------------------|
| DWHGXD | Textured white     |
| DSSTXD | Textured sandstone |

## Accessories

Ordered and shipped separately.

|           |  |
|-----------|--|
| DSXWHS U  | House-side shield (one per light engine) |
| DSXWBSW U | Bird-deterrent spikes                    |
| DSXW1WG U | Wire guard accessory                     |
| DSXW1VG U | Vandal guard accessory                   |

### NOTES

- 20C 1000 is not available with PIR, PIRH, PIR1FC3V or PIRH1FC3V.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Reference Motion Sensor table on page 3.
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at [www.lithonia.com](http://www.lithonia.com)
- Not available with SPD.
- Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- Not available with ELCW.





# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| LEDs      | Drive Current (mA) | System Watts | Dist. Type | 30K (3000 K, 70CRI) |   |   |     |       | 40K (4000 K, 70CRI) |   |   |     |       | 50K (5000 K, 70CRI) |   |   |     |       | AMBPC (Amber Phosphor Converted) |   |   |    |     |
|-----------|--------------------|--------------|------------|---------------------|---|---|-----|-------|---------------------|---|---|-----|-------|---------------------|---|---|-----|-------|----------------------------------|---|---|----|-----|
|           |                    |              |            | Lumens              | B | U | G   | LPW   | Lumens              | B | U | G   | LPW   | Lumens              | B | U | G   | LPW   | Lumens                           | B | U | G  | LPW |
| (10 LEDs) | 350mA              | 13W          | T2S        | 1,415               | 0 | 0 | 1   | 109   | 1,520               | 0 | 0 | 1   | 117   | 1,530               | 0 | 0 | 1   | 118   | 894                              | 0 | 0 | 1  | 69  |
|           |                    |              | T2M        | 1,349               | 0 | 0 | 1   | 104   | 1,448               | 0 | 0 | 1   | 111   | 1,458               | 0 | 0 | 1   | 112   | 852                              | 0 | 0 | 1  | 66  |
|           |                    |              | T3S        | 1,399               | 0 | 0 | 1   | 108   | 1,503               | 0 | 0 | 1   | 116   | 1,512               | 0 | 0 | 1   | 116   | 884                              | 0 | 0 | 1  | 68  |
|           |                    |              | T3M        | 1,385               | 0 | 0 | 1   | 107   | 1,488               | 0 | 0 | 1   | 114   | 1,497               | 0 | 0 | 1   | 115   | 876                              | 0 | 0 | 1  | 67  |
|           |                    |              | T4M        | 1,357               | 0 | 0 | 1   | 104   | 1,458               | 0 | 0 | 1   | 112   | 1,467               | 0 | 0 | 1   | 113   | 858                              | 0 | 0 | 1  | 66  |
|           |                    |              | TFTM       | 1,411               | 0 | 0 | 1   | 109   | 1,515               | 0 | 0 | 1   | 117   | 1,525               | 0 | 0 | 1   | 117   | 892                              | 0 | 0 | 1  | 69  |
|           | 530 mA             | 19W          | ASYDF      | 1,262               | 1 | 0 | 1   | 97    | 1,354               | 1 | 0 | 1   | 104   | 1,363               | 1 | 0 | 1   | 105   | 797                              | 0 | 0 | 1  | 61  |
|           |                    |              | T2S        | 2,053               | 1 | 0 | 1   | 108   | 2,205               | 1 | 0 | 1   | 116   | 2,220               | 1 | 0 | 1   | 117   | 1,264                            | 0 | 0 | 1  | 67  |
|           |                    |              | T2M        | 1,957               | 1 | 0 | 1   | 103   | 2,102               | 1 | 0 | 1   | 111   | 2,115               | 1 | 0 | 1   | 111   | 1,205                            | 0 | 0 | 1  | 63  |
|           |                    |              | T3S        | 2,031               | 1 | 0 | 1   | 107   | 2,181               | 1 | 0 | 1   | 115   | 2,194               | 1 | 0 | 1   | 115   | 1,250                            | 0 | 0 | 1  | 66  |
|           |                    |              | T3M        | 2,010               | 1 | 0 | 1   | 106   | 2,159               | 1 | 0 | 1   | 114   | 2,172               | 1 | 0 | 1   | 114   | 1,237                            | 0 | 0 | 1  | 65  |
|           |                    |              | T4M        | 1,970               | 1 | 0 | 1   | 104   | 2,115               | 1 | 0 | 1   | 111   | 2,129               | 1 | 0 | 1   | 112   | 1,212                            | 0 | 0 | 1  | 64  |
|           | 700 mA             | 26W          | TFTM       | 2,047               | 0 | 0 | 1   | 108   | 2,198               | 1 | 0 | 1   | 116   | 2,212               | 1 | 0 | 1   | 116   | 1,260                            | 0 | 0 | 1  | 66  |
|           |                    |              | ASYDF      | 1,831               | 1 | 0 | 1   | 96    | 1,966               | 1 | 0 | 1   | 103   | 1,978               | 1 | 0 | 1   | 104   | 1,127                            | 0 | 0 | 1  | 59  |
|           |                    |              | T2S        | 2,623               | 1 | 0 | 1   | 101   | 2,816               | 1 | 0 | 1   | 108   | 2,834               | 1 | 0 | 1   | 109   | 1,544                            | 0 | 0 | 1  | 59  |
|           |                    |              | T2M        | 2,499               | 1 | 0 | 1   | 96    | 2,684               | 1 | 0 | 1   | 103   | 2,701               | 1 | 0 | 1   | 104   | 1,472                            | 0 | 0 | 1  | 57  |
|           |                    |              | T3S        | 2,593               | 1 | 0 | 1   | 100   | 2,785               | 1 | 0 | 1   | 107   | 2,802               | 1 | 0 | 1   | 108   | 1,527                            | 0 | 0 | 1  | 59  |
|           |                    |              | T3M        | 2,567               | 1 | 0 | 1   | 99    | 2,757               | 1 | 0 | 1   | 106   | 2,774               | 1 | 0 | 1   | 107   | 1,512                            | 0 | 0 | 1  | 58  |
|           | 1000 mA            | 39W          | T4M        | 2,515               | 1 | 0 | 1   | 97    | 2,701               | 1 | 0 | 1   | 104   | 2,718               | 1 | 0 | 1   | 105   | 1,481                            | 0 | 0 | 1  | 57  |
|           |                    |              | TFTM       | 2,614               | 1 | 0 | 1   | 101   | 2,808               | 1 | 0 | 1   | 108   | 2,825               | 1 | 0 | 1   | 109   | 1,539                            | 0 | 0 | 1  | 59  |
|           |                    |              | ASYDF      | 2,337               | 1 | 0 | 1   | 90    | 2,510               | 1 | 0 | 1   | 97    | 2,525               | 1 | 0 | 1   | 97    | 1,376                            | 1 | 0 | 1  | 53  |
|           |                    |              | T2S        | 3,685               | 1 | 0 | 1   | 94    | 3,957               | 1 | 0 | 1   | 101   | 3,982               | 1 | 0 | 1   | 102   | 2,235                            | 1 | 0 | 1  | 57  |
|           |                    |              | T2M        | 3,512               | 1 | 0 | 1   | 90    | 3,771               | 1 | 0 | 1   | 97    | 3,794               | 1 | 0 | 1   | 97    | 2,130                            | 1 | 0 | 1  | 55  |
|           |                    |              | T3S        | 3,644               | 1 | 0 | 1   | 93    | 3,913               | 1 | 0 | 1   | 100   | 3,938               | 1 | 0 | 1   | 101   | 2,210                            | 1 | 0 | 1  | 57  |
| (20 LEDs) | 350mA              | 23W          | T3M        | 3,607               | 1 | 0 | 1   | 92    | 3,873               | 1 | 0 | 1   | 99    | 3,898               | 1 | 0 | 1   | 100   | 2,187                            | 1 | 0 | 1  | 56  |
|           |                    |              | T4M        | 3,534               | 1 | 0 | 2   | 91    | 3,796               | 1 | 0 | 2   | 97    | 3,819               | 1 | 0 | 2   | 98    | 2,143                            | 1 | 0 | 1  | 55  |
|           |                    |              | TFTM       | 3,673               | 1 | 0 | 1   | 94    | 3,945               | 1 | 0 | 1   | 101   | 3,969               | 1 | 0 | 1   | 102   | 2,228                            | 1 | 0 | 1  | 57  |
|           |                    |              | ASYDF      | 3,284               | 1 | 0 | 2   | 84    | 3,527               | 1 | 0 | 2   | 90    | 3,549               | 1 | 0 | 2   | 91    | 1,992                            | 1 | 0 | 1  | 51  |
|           |                    |              | T2S        | 2,820               | 1 | 0 | 1   | 123   | 3,028               | 1 | 0 | 1   | 132   | 3,047               | 1 | 0 | 1   | 132   | 1,777                            | 1 | 0 | 1  | 77  |
|           |                    |              | T2M        | 2,688               | 1 | 0 | 1   | 117   | 2,886               | 1 | 0 | 1   | 125   | 2,904               | 1 | 0 | 1   | 126   | 1,693                            | 1 | 0 | 1  | 74  |
|           | 530 mA             | 35W          | T3S        | 2,789               | 1 | 0 | 1   | 121   | 2,994               | 1 | 0 | 1   | 130   | 3,014               | 1 | 0 | 1   | 131   | 1,757                            | 0 | 0 | 1  | 76  |
|           |                    |              | T3M        | 2,760               | 1 | 0 | 1   | 120   | 2,965               | 1 | 0 | 1   | 129   | 2,983               | 1 | 0 | 1   | 130   | 1,739                            | 1 | 0 | 1  | 76  |
|           |                    |              | T4M        | 2,704               | 1 | 0 | 1   | 118   | 2,905               | 1 | 0 | 1   | 126   | 2,922               | 1 | 0 | 1   | 127   | 1,704                            | 1 | 0 | 1  | 74  |
|           |                    |              | TFTM       | 2,811               | 1 | 0 | 1   | 122   | 3,019               | 1 | 0 | 1   | 131   | 3,038               | 1 | 0 | 1   | 132   | 1,771                            | 0 | 0 | 1  | 77  |
|           |                    |              | ASYDF      | 2,514               | 1 | 0 | 1   | 109   | 2,699               | 1 | 0 | 1   | 117   | 2,716               | 1 | 0 | 1   | 118   | 1,584                            | 1 | 0 | 1  | 69  |
|           |                    |              | T2S        | 4,079               | 1 | 0 | 1   | 117   | 4,380               | 1 | 0 | 1   | 125   | 4,407               | 1 | 0 | 1   | 126   | 2,504                            | 1 | 0 | 1  | 72  |
|           | 700 mA             | 46W          | T2M        | 3,887               | 1 | 0 | 1   | 111   | 4,174               | 1 | 0 | 1   | 119   | 4,201               | 1 | 0 | 1   | 120   | 2,387                            | 1 | 0 | 1  | 68  |
|           |                    |              | T3S        | 4,033               | 1 | 0 | 1   | 115   | 4,331               | 1 | 0 | 1   | 124   | 4,359               | 1 | 0 | 1   | 125   | 2,477                            | 1 | 0 | 1  | 71  |
|           |                    |              | T3M        | 3,993               | 1 | 0 | 2   | 114   | 4,288               | 1 | 0 | 2   | 123   | 4,315               | 1 | 0 | 2   | 123   | 2,451                            | 1 | 0 | 1  | 70  |
|           |                    |              | T4M        | 3,912               | 1 | 0 | 2   | 112   | 4,201               | 1 | 0 | 2   | 120   | 4,227               | 1 | 0 | 2   | 121   | 2,402                            | 1 | 0 | 1  | 69  |
|           |                    |              | TFTM       | 4,066               | 1 | 0 | 2   | 116   | 4,366               | 1 | 0 | 2   | 125   | 4,394               | 1 | 0 | 2   | 126   | 2,496                            | 1 | 0 | 1  | 71  |
|           |                    |              | ASYDF      | 3,636               | 1 | 0 | 2   | 104   | 3,904               | 1 | 0 | 2   | 112   | 3,928               | 1 | 0 | 2   | 112   | 2,232                            | 1 | 0 | 1  | 64  |
|           | 1000 mA            | 73W          | T2S        | 5,188               | 1 | 0 | 1   | 113   | 5,572               | 1 | 0 | 1   | 121   | 5,607               | 1 | 0 | 1   | 122   | 3,065                            | 1 | 0 | 1  | 67  |
|           |                    |              | T2M        | 4,945               | 1 | 0 | 2   | 108   | 5,309               | 1 | 0 | 2   | 115   | 5,343               | 1 | 0 | 2   | 116   | 2,921                            | 1 | 0 | 1  | 64  |
|           |                    |              | T3S        | 5,131               | 1 | 0 | 2   | 112   | 5,510               | 1 | 0 | 2   | 120   | 5,544               | 1 | 0 | 2   | 121   | 3,031                            | 1 | 0 | 1  | 66  |
|           |                    |              | T3M        | 5,078               | 1 | 0 | 2   | 110   | 5,454               | 1 | 0 | 2   | 119   | 5,487               | 1 | 0 | 2   | 119   | 3,000                            | 1 | 0 | 1  | 65  |
|           |                    |              | T4M        | 4,975               | 1 | 0 | 2   | 108   | 5,343               | 1 | 0 | 2   | 116   | 5,376               | 1 | 0 | 2   | 117   | 2,939                            | 1 | 0 | 1  | 64  |
|           |                    |              | TFTM       | 5,172               | 1 | 0 | 2   | 112   | 5,554               | 1 | 0 | 2   | 121   | 5,589               | 1 | 0 | 2   | 122   | 3,055                            | 1 | 0 | 1  | 66  |
| 1000 mA   | 73W                | ASYDF        | 4,624      | 1                   | 0 | 2 | 101 | 4,965 | 1                   | 0 | 2 | 108 | 4,996 | 1                   | 0 | 2 | 109 | 2,732 | 1                                | 0 | 1 | 59 |     |
|           |                    | T2S          | 7,204      | 1                   | 0 | 2 | 99  | 7,736 | 2                   | 0 | 2 | 106 | 7,784 | 2                   | 0 | 2 | 107 | 4,429 | 1                                | 0 | 1 | 61 |     |
|           |                    | T2M          | 6,865      | 1                   | 0 | 2 | 94  | 7,373 | 2                   | 0 | 2 | 101 | 7,419 | 2                   | 0 | 2 | 102 | 4,221 | 1                                | 0 | 1 | 58 |     |
|           |                    | T3S          | 7,125      | 1                   | 0 | 2 | 98  | 7,651 | 1                   | 0 | 2 | 105 | 7,698 | 1                   | 0 | 2 | 105 | 4,380 | 1                                | 0 | 1 | 60 |     |
|           |                    | T3M          | 7,052      | 1                   | 0 | 2 | 97  | 7,573 | 2                   | 0 | 2 | 104 | 7,620 | 2                   | 0 | 2 | 104 | 4,335 | 1                                | 0 | 2 | 59 |     |
|           |                    | T4M          | 6,909      | 1                   | 0 | 2 | 95  | 7,420 | 1                   | 0 | 2 | 102 | 7,466 | 1                   | 0 | 2 | 102 | 4,248 | 1                                | 0 | 2 | 58 |     |
|           |                    |              | TFTM       | 7,182               | 1 | 0 | 2   | 98    | 7,712               | 1 | 0 | 2   | 106   | 7,761               | 1 | 0 | 2   | 106   | 4,415                            | 1 | 0 | 2  | 60  |
|           |                    |              | ASYDF      | 6,421               | 2 | 0 | 2   | 88    | 6,896               | 2 | 0 | 3   | 94    | 6,938               | 2 | 0 | 3   | 95    | 3,947                            | 1 | 0 | 2  | 54  |



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient |       | Lumen Multiplier |
|---------|-------|------------------|
| 0°C     | 32°F  | 1.02             |
| 10°C    | 50°F  | 1.01             |
| 20°C    | 68°F  | 1.00             |
| 25°C    | 77°F  | 1.00             |
| 30°C    | 86°F  | 1.00             |
| 40°C    | 104°F | 0.98             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the DSXW1 LED 20C 1000 platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours          | 0   | 25,000 | 50,000 | 100,000 |
|--------------------------|-----|--------|--------|---------|
| Lumen Maintenance Factor | 1.0 | 0.95   | 0.93   | 0.88    |

### Electrical Load

| LEDs | Drive Current (mA) | System Watts | Current (A) |      |      |      |      |      |
|------|--------------------|--------------|-------------|------|------|------|------|------|
|      |                    |              | 120V        | 208V | 240V | 277V | 347V | 480V |
| 10C  | 350                | 14 W         | 0.13        | 0.07 | 0.06 | 0.06 | -    | -    |
|      | 530                | 20 W         | 0.19        | 0.11 | 0.09 | 0.08 | -    | -    |
|      | 700                | 27 W         | 0.25        | 0.14 | 0.13 | 0.11 | -    | -    |
|      | 1000               | 40 W         | 0.37        | 0.21 | 0.19 | 0.16 | -    | -    |
| 20C  | 350                | 24 W         | 0.23        | 0.13 | 0.12 | 0.10 | -    | -    |
|      | 530                | 36 W         | 0.33        | 0.19 | 0.17 | 0.14 | -    | -    |
|      | 700                | 47 W         | 0.44        | 0.25 | 0.22 | 0.19 | 0.15 | 0.11 |
|      | 1000               | 74 W         | 0.69        | 0.40 | 0.35 | 0.30 | 0.23 | 0.17 |

### Motion Sensor Default Settings


| Option                | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|-----------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| *PIR or PIRH          | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use with Inline Dusk to Dawn or timer

## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isofootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

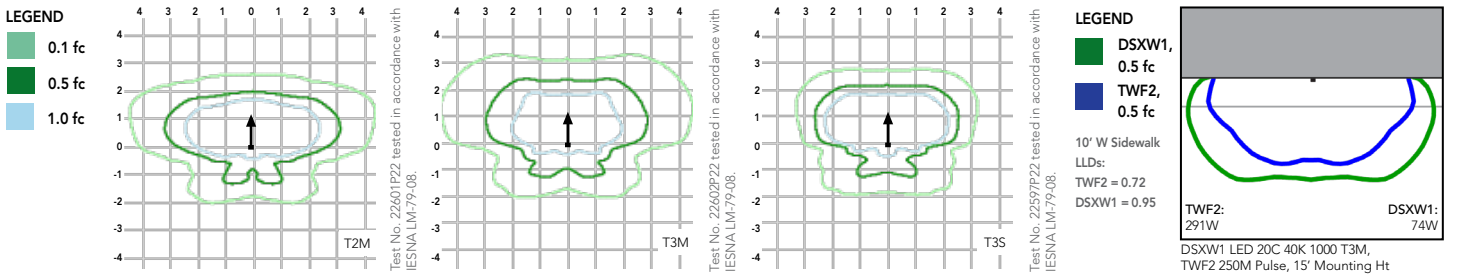

## Options and Accessories



T3M (left), ASYDF (right) lenses



HS - House-side shields



BSW - Bird-deterrent spikes



WG - Wire guard



VG - Vandal guard



DDL - Diffused drop lens

## FEATURES & SPECIFICATIONS

### INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

### CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

### ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

### INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

### LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/resources/terms-and-conditions](http://www.acuitybrands.com/resources/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 800.775.4378 • [www.lithonia.com](http://www.lithonia.com)  
© 2013-2019 Acuity Brands Lighting, Inc. All rights reserved.

DSXW1-LED  
Rev. 8/15/19



# D-Series Size 2 LED Wall Luminaire



d<sup>series</sup>

## Specifications Luminaire

**Width:** 18-1/2" (47.0 cm) **Weight:** 21 lbs (9.5 kg)

**Depth:** 10" (25.4 cm)


**Height:** 7-5/8" (19.4 cm)

## Back Box (BBW)

**Width:** 5-1/2" (14.0 cm) **BBW Weight:** 1 lbs (0.5 kg)

**Depth:** 1-1/2" (3.8 cm)

**Height:** 4" (10.2 cm)

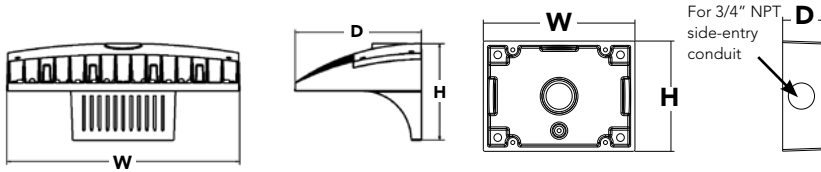

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Hit the Tab key or mouse over the page to see all interactive elements.

## A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL<sup>®</sup> controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM<sup>®</sup> or XPoint<sup>™</sup> Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

A+ Capable options indicated by this color background.

## Ordering Information

EXAMPLE: DSXW2 LED 30C 700 40K T3M MVOLT DDBTXD

| Series           | LEDs                      | Drive Current                   | Color temperature                             | Distribution   | Voltage   | Mounting  | Control Options  |
|------------------|---------------------------|---------------------------------|---|--|---|---|--|
| <b>DSXW2 LED</b> |                           |                                 |   |  |   |   |  |
|                  | 20C 20 LEDs (two engines) | 350 350 mA<br><b>530</b> 530 mA | 30K 3000 K<br>40K 4000 K<br><b>50K</b> 5000 K | T2S Type II Short<br>T2M Type II Medium<br>T3S Type III Short<br><b>T3M</b> Type III Medium<br>T4M Type IV Medium<br>TFTM Forward Throw Medium | <b>MVOLT</b> <sup>3</sup><br>120 <sup>4</sup><br>208 <sup>4</sup><br>240 <sup>4</sup><br>277 <sup>4</sup><br>347 <sup>4,5</sup><br>480 <sup>4,5</sup> | <b>Shipped included</b><br>(blank) Surface mounting bracket<br><br><b>Shipped separately</b> <sup>6</sup><br>BBW Surface-mounted back box (for conduit entry) | <b>Shipped installed</b><br>PE Photoelectric cell, button type <sup>7</sup><br><b>PER</b> NEMA twist-lock receptacle only (control ordered separate) <sup>8</sup><br>PER5 Five-wire receptacle only (control ordered separate) <sup>8,9</sup><br>PER7 Seven-wire receptacle only (control ordered separate) <sup>8,9</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)<br>PIR 180° motion/ambient light sensor, <15' mtg ht <sup>10,11</sup><br>PIRH 180° motion/ambient light sensor, 15-30' mtg ht <sup>10,11</sup><br>PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>11,12</sup><br>PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>11,12</sup> |

| Other Options                                | Finish (required)                |
|--|----------------------------------|
| <b>Shipped installed</b>                     |                                  |
| SF Single fuse (120, 277, 347V) <sup>3</sup> | DDBXD Dark bronze                |
| DF Double fuse (208, 240, 480V) <sup>3</sup> | DBLXD Black                      |
| HS House-side shield <sup>4</sup>            | DNAXD Natural aluminum           |
| SPD Separate surge protection <sup>13</sup>  | DWHXD White                      |
| <b>Shipped separately</b> <sup>13</sup>      | DSSXD Sandstone                  |
| BSW Bird-deterrent spikes                    | DDBTXD Textured dark bronze      |
| VG Vandal guard                              | DBLBXD Textured black            |
|  | DNATXD Textured natural aluminum |
|  | DWHGXD Textured white            |
|  | DSSTXD Textured sandstone        |



## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photozell - SSL twist-lock (120-277V) <sup>14</sup>                   |
| DLL347F 1.5 CUL JU | Photozell - SSL twist-lock (347V) <sup>14</sup>                       |
| DLL480F 1.5 CUL JU | Photozell - SSL twist-lock (480V) <sup>14</sup>                       |
| DSHORT SBK U       | Shorting cap (Included when ordering PER, PERS or PER7) <sup>14</sup> |
| DSXWHS U           | House-side shield (one per light engine)                              |
| DSXWBSW U          | Bird-deterrent spikes   |
| DSXW2VG U          | Vandal guard accessory  |
| DSXW2BBW           | Back box accessory  |
| DBBXDU U           | (specify finish)  |

For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- 1000mA is not available with AMBPC.
- AMBPC is not available with 1000mA.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Available with 30 LED/700mA options only (DSXW2 LED 30C 700). DMG option not available.
- Also available as a separate accessory; see Accessories information.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Photozell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Shorting Cap included.
- Reference Motion Sensor table on page 3.
- Reference PER Table on page 3 for functionality.
- PIR and PIR1FC3V specify the [SensorSwitch SBGR-10-ODP](#) control; PIRH and PIRH1FC3V specify the [SensorSwitch SBGR-6-ODP](#) control; see [Motion Sensor Guide](#) for details. Dimming driver standard. Not available with PER5 or PER7. Separate on/off required.
- See the electrical section on page 2 for more details.
- Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item. See PER Table.

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| LEDs             | Drive Current (mA) | System Watts | Dist. Type | 30K    |   |   |   |     | 40K    |   |   |   |     | 50K    |   |   |   |     |
|------------------|--------------------|--------------|------------|--------|---|---|---|-----|--------|---|---|---|-----|--------|---|---|---|-----|
|                  |                    |              |            | Lumens | B | U | G | LPW | Lumens | B | U | G | LPW | Lumens | B | U | G | LPW |
| 20C<br>(20 LEDs) | 350 mA             | 25W          | T2S        | 2,783  | 1 | 0 | 1 | 111 | 2,989  | 1 | 0 | 1 | 120 | 3,008  | 1 | 0 | 1 | 120 |
|                  |                    |              | T2M        | 2,709  | 1 | 0 | 1 | 108 | 2,908  | 1 | 0 | 1 | 116 | 2,926  | 1 | 0 | 1 | 117 |
|                  |                    |              | T3S        | 2,748  | 1 | 0 | 1 | 110 | 2,951  | 1 | 0 | 1 | 118 | 2,969  | 1 | 0 | 1 | 119 |
|                  |                    |              | T3M        | 2,793  | 1 | 0 | 1 | 112 | 2,999  | 1 | 0 | 1 | 120 | 3,018  | 1 | 0 | 1 | 121 |
|                  |                    |              | T4M        | 2,756  | 1 | 0 | 1 | 110 | 2,959  | 1 | 0 | 1 | 118 | 2,977  | 1 | 0 | 1 | 119 |
|                  |                    |              | TFTM       | 2,753  | 1 | 0 | 1 | 110 | 2,956  | 1 | 0 | 1 | 118 | 2,975  | 1 | 0 | 1 | 119 |
|                  | 530 mA             | 36W          | T2S        | 4,030  | 1 | 0 | 1 | 112 | 4,327  | 1 | 0 | 1 | 120 | 4,354  | 1 | 0 | 1 | 121 |
|                  |                    |              | T2M        | 3,920  | 1 | 0 | 1 | 109 | 4,210  | 1 | 0 | 1 | 117 | 4,236  | 1 | 0 | 1 | 118 |
|                  |                    |              | T3S        | 3,978  | 1 | 0 | 1 | 111 | 4,272  | 1 | 0 | 1 | 119 | 4,299  | 1 | 0 | 1 | 119 |
|                  |                    |              | T3M        | 4,044  | 1 | 0 | 2 | 112 | 4,343  | 1 | 0 | 2 | 121 | 4,370  | 1 | 0 | 2 | 121 |
|                  |                    |              | T4M        | 3,990  | 1 | 0 | 1 | 111 | 4,284  | 1 | 0 | 1 | 119 | 4,310  | 1 | 0 | 1 | 120 |
|                  |                    |              | TFTM       | 3,987  | 1 | 0 | 1 | 111 | 4,281  | 1 | 0 | 1 | 119 | 4,308  | 1 | 0 | 1 | 120 |
|                  | 700 mA             | 47W          | T2S        | 5,130  | 1 | 0 | 1 | 109 | 5,509  | 1 | 0 | 1 | 117 | 5,544  | 1 | 0 | 1 | 118 |
|                  |                    |              | T2M        | 4,991  | 1 | 0 | 2 | 106 | 5,360  | 1 | 0 | 2 | 114 | 5,393  | 1 | 0 | 2 | 115 |
|                  |                    |              | T3S        | 5,066  | 1 | 0 | 1 | 108 | 5,440  | 1 | 0 | 1 | 116 | 5,474  | 1 | 0 | 1 | 116 |
|                  |                    |              | T3M        | 5,148  | 1 | 0 | 2 | 110 | 5,529  | 1 | 0 | 2 | 118 | 5,563  | 1 | 0 | 2 | 118 |
|                  |                    |              | T4M        | 5,080  | 1 | 0 | 2 | 108 | 5,455  | 1 | 0 | 2 | 116 | 5,488  | 1 | 0 | 2 | 117 |
|                  |                    |              | TFTM       | 5,075  | 1 | 0 | 2 | 108 | 5,450  | 1 | 0 | 2 | 116 | 5,484  | 1 | 0 | 2 | 117 |
|                  | 1000 mA            | 73W          | T2S        | 7,147  | 2 | 0 | 2 | 98  | 7,675  | 2 | 0 | 2 | 105 | 7,723  | 1 | 0 | 1 | 104 |
|                  |                    |              | T2M        | 6,954  | 2 | 0 | 2 | 95  | 7,467  | 2 | 0 | 2 | 102 | 7,514  | 2 | 0 | 2 | 103 |
|                  |                    |              | T3S        | 7,057  | 1 | 0 | 2 | 97  | 7,579  | 1 | 0 | 2 | 104 | 7,627  | 1 | 0 | 2 | 104 |
|                  |                    |              | T3M        | 7,172  | 2 | 0 | 3 | 98  | 7,702  | 2 | 0 | 3 | 106 | 7,751  | 2 | 0 | 3 | 106 |
|                  |                    |              | T4M        | 7,076  | 1 | 0 | 2 | 97  | 7,599  | 1 | 0 | 2 | 104 | 7,646  | 1 | 0 | 2 | 105 |
|                  |                    |              | TFTM       | 7,071  | 1 | 0 | 2 | 97  | 7,594  | 1 | 0 | 2 | 104 | 7,641  | 1 | 0 | 2 | 105 |
| 30C<br>(30 LEDs) | 350 mA             | 36W          | T2S        | 4,160  | 1 | 0 | 1 | 116 | 4,467  | 1 | 0 | 1 | 124 | 4,494  | 1 | 0 | 1 | 125 |
|                  |                    |              | T2M        | 4,048  | 1 | 0 | 1 | 112 | 4,346  | 1 | 0 | 2 | 121 | 4,373  | 1 | 0 | 2 | 121 |
|                  |                    |              | T3S        | 4,108  | 1 | 0 | 1 | 114 | 4,411  | 1 | 0 | 1 | 123 | 4,438  | 1 | 0 | 1 | 123 |
|                  |                    |              | T3M        | 4,174  | 1 | 0 | 2 | 116 | 4,483  | 1 | 0 | 2 | 125 | 4,510  | 1 | 0 | 2 | 125 |
|                  |                    |              | T4M        | 4,119  | 1 | 0 | 1 | 114 | 4,423  | 1 | 0 | 2 | 123 | 4,450  | 1 | 0 | 2 | 124 |
|                  |                    |              | TFTM       | 4,115  | 1 | 0 | 1 | 114 | 4,419  | 1 | 0 | 1 | 123 | 4,446  | 1 | 0 | 1 | 124 |
|                  | 530 mA             | 54W          | T2S        | 6,001  | 1 | 0 | 1 | 111 | 6,444  | 1 | 0 | 1 | 119 | 6,484  | 1 | 0 | 1 | 120 |
|                  |                    |              | T2M        | 5,838  | 1 | 0 | 2 | 108 | 6,270  | 2 | 0 | 2 | 116 | 6,308  | 2 | 0 | 2 | 117 |
|                  |                    |              | T3S        | 5,926  | 1 | 0 | 2 | 110 | 6,364  | 1 | 0 | 2 | 118 | 6,403  | 1 | 0 | 2 | 119 |
|                  |                    |              | T3M        | 6,023  | 1 | 0 | 2 | 112 | 6,467  | 1 | 0 | 2 | 120 | 6,507  | 1 | 0 | 2 | 121 |
|                  |                    |              | T4M        | 5,942  | 1 | 0 | 2 | 110 | 6,380  | 1 | 0 | 2 | 118 | 6,420  | 1 | 0 | 2 | 119 |
|                  |                    |              | TFTM       | 5,937  | 1 | 0 | 2 | 110 | 6,376  | 1 | 0 | 2 | 118 | 6,415  | 1 | 0 | 2 | 119 |
|                  | 700 mA             | 71W          | T2S        | 7,403  | 2 | 0 | 2 | 104 | 8,170  | 2 | 0 | 2 | 115 | 8,221  | 2 | 0 | 2 | 116 |
|                  |                    |              | T2M        | 7,609  | 2 | 0 | 2 | 107 | 7,949  | 2 | 0 | 2 | 112 | 7,998  | 2 | 0 | 2 | 113 |
|                  |                    |              | T3S        | 7,513  | 1 | 0 | 2 | 106 | 8,068  | 1 | 0 | 2 | 114 | 8,118  | 1 | 0 | 2 | 114 |
|                  |                    |              | T3M        | 7,635  | 2 | 0 | 3 | 108 | 8,199  | 2 | 0 | 3 | 115 | 8,250  | 2 | 0 | 3 | 116 |
|                  |                    |              | T4M        | 7,534  | 1 | 0 | 2 | 106 | 8,089  | 1 | 0 | 2 | 114 | 8,140  | 1 | 0 | 2 | 115 |
|                  |                    |              | TFTM       | 7,527  | 1 | 0 | 2 | 106 | 8,082  | 2 | 0 | 2 | 114 | 8,134  | 2 | 0 | 2 | 115 |
|                  | 1000 mA            | 109W         | T2S        | 10,468 | 2 | 0 | 2 | 96  | 11,241 | 2 | 0 | 2 | 103 | 11,311 | 2 | 0 | 2 | 104 |
|                  |                    |              | T2M        | 10,184 | 2 | 0 | 3 | 93  | 10,936 | 2 | 0 | 3 | 100 | 11,005 | 2 | 0 | 3 | 101 |
|                  |                    |              | T3S        | 10,335 | 2 | 0 | 2 | 95  | 11,099 | 2 | 0 | 2 | 102 | 11,169 | 2 | 0 | 2 | 102 |
|                  |                    |              | T3M        | 10,505 | 2 | 0 | 3 | 96  | 11,280 | 2 | 0 | 3 | 103 | 11,351 | 2 | 0 | 3 | 104 |
|                  |                    |              | T4M        | 10,365 | 2 | 0 | 2 | 95  | 11,129 | 2 | 0 | 2 | 102 | 11,198 | 2 | 0 | 2 | 103 |
|                  |                    |              | TFTM       | 10,356 | 2 | 0 | 2 | 95  | 11,121 | 2 | 0 | 3 | 102 | 11,190 | 2 | 0 | 3 | 103 |

### Note:

Available with phosphor-converted amber LED's (nomenclature AMBPC). These LED's produce light with 97+% >530 nm. Output can be calculated by applying a 0.7 factor to 4000 K lumen values and photometric files.



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.02             |
| 10°C        | 50°F        | 1.01             |
| 20°C        | 68°F        | 1.00             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 1.00             |
| 40°C        | 104°F       | 0.98             |

### Electrical Load

| LEDs | Drive Current (mA) | System Watts | Current (A) |      |      |      |      |      |
|------|--------------------|--------------|-------------|------|------|------|------|------|
|      |                    |              | 120V        | 208V | 240V | 277V | 347V | 480V |
| 20C  | 350                | 25 W         | 0.23        | 0.13 | 0.12 | 0.10 | -    | -    |
|      | 530                | 36 W         | 0.33        | 0.19 | 0.17 | 0.14 | -    | -    |
|      | 700                | 47 W         | 0.44        | 0.25 | 0.22 | 0.19 | -    | -    |
|      | 1000               | 74 W         | 0.68        | 0.39 | 0.34 | 0.29 | -    | -    |
| 30C  | 350                | 36 W         | 0.33        | 0.19 | 0.17 | 0.14 | -    | -    |
|      | 530                | 54 W         | 0.50        | 0.29 | 0.25 | 0.22 | -    | -    |
|      | 700                | 71 W         | 0.66        | 0.38 | 0.33 | 0.28 | 0.23 | 0.16 |
|      | 1000               | 109 W        | 1.01        | 0.58 | 0.50 | 0.44 | -    | -    |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW2 LED 30C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours          | 0   | 25,000 | 50,000 | 100,000 |
|--------------------------|-----|--------|--------|---------|
| Lumen Maintenance Factor | 1.0 | 0.95   | 0.92   | 0.87    |

### Motion Sensor Default Settings

| Option                | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|-----------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| *PIR or PIRH          | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use with Inline Dusk to Dawn or timer

### PER Table

| Control                    | PER (3 wire) | PER5 (5 wire) |                                  | PER7 (7 wire) |                                  |                             |
|----------------------------|--------------|---------------|----------------------------------|---------------|----------------------------------|-----------------------------|
|                            |              |               | Wire 4/Wire5                     |               | Wire 4/Wire5                     | Wire 6/Wire7                |
| Photocontrol Only (On/Off) | ✓            | ⚠             | Wired to dimming leads on driver | ⚠             | Wired to dimming leads on driver | Wires Capped inside fixture |
| ROAM                       | ⊘            | ✓             | Wired to dimming leads on driver | ⚠             | Wired to dimming leads on driver | Wires Capped inside fixture |
| ROAM with Motion           | ⊘            | ⚠             | Wired to dimming leads on driver | ⚠             | Wired to dimming leads on driver | Wires Capped inside fixture |
| Futureproof*               | ⊘            | ⚠             | Wired to dimming leads on driver | ✓             | Wired to dimming leads on driver | Wires Capped inside fixture |
| Futureproof* with Motion   | ⊘            | ⚠             | Wired to dimming leads on driver | ✓             | Wired to dimming leads on driver | Wires Capped inside fixture |


✓ Recommended

⊘ Will not work


⚠ Alternate

\*Futureproof means: Ability to change controls in the future.

Isofootcandle plots for the DSXW2 LED 30C 1000 40K. Distances are in units of mounting height (25').

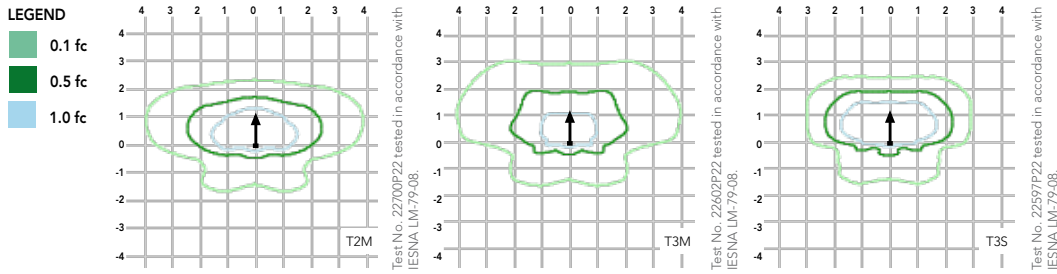

Distribution overlay comparison to 400W metal halide.

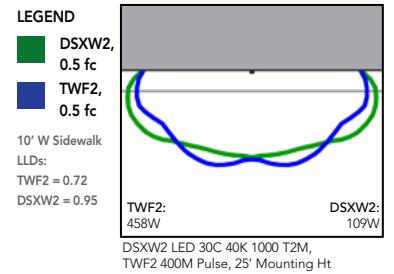

## FEATURES & SPECIFICATIONS

### INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 2 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

### CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

### ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L87/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

### INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

### LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.


DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org](http://www.designlights.org) to confirm which versions are qualified.

### WARRANTY

Five-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



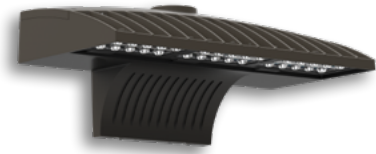

# D-Series Size 2 LED Wall Luminaire



d<sup>series</sup>

## Specifications Luminaire

**Width:** 18-1/2" (47.0 cm) **Weight:** 21 lbs (9.5 kg)

**Depth:** 10" (25.4 cm)


**Height:** 7-5/8" (19.4 cm)

## Back Box (BBW)

**Width:** 5-1/2" (14.0 cm) **BBW Weight:** 1 lbs (0.5 kg)

**Depth:** 1-1/2" (3.8 cm)

**Height:** 4" (10.2 cm)

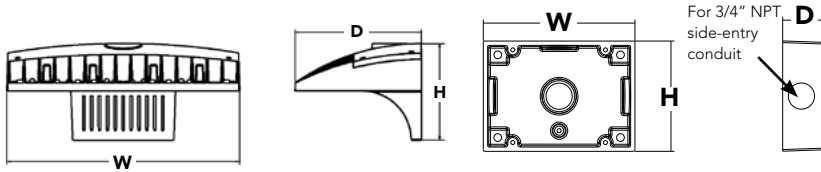

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Hit the Tab key or mouse over the page to see all interactive elements.

## A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL<sup>®</sup> controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM<sup>®</sup> or XPoint<sup>™</sup> Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

A+ Capable options indicated by this color background.

## Ordering Information

EXAMPLE: DSXW2 LED 30C 700 40K T3M MVOLT DDBTXD

| Series           | LEDs                               | Drive Current                                 | Color temperature  | Distribution  | Voltage  | Mounting   | Control Options   |
|------------------|------------------------------------|---|--|---|--|--|---|
| <b>DSXW2 LED</b> |                                    |   |  |   |  |  |   |
|                  | 20C 20 LEDs (two engines)          | 350 350 mA<br><b>530</b> 530 mA               | 30K 3000 K<br>40K 4000 K   | T2S Type II Short<br>T2M Type II Medium   | <b>MVOLT</b> <sup>3</sup><br>120 <sup>4</sup>  | <b>Shipped included</b><br>(blank) Surface mounting bracket                                | <b>Shipped installed</b><br>PE Photoelectric cell, button type <sup>7</sup><br><b>PER</b> NEMA twist-lock receptacle only (control ordered separate) <sup>8</sup>   |
|                  | <b>30C</b> 30 LEDs (three engines) | 700 700 mA<br>1000 1000 mA <sup>1</sup> (1 A) | <b>50K</b> 5000 K<br>AMBPC Amber phosphor converted <sup>2</sup> | T3S Type III Short<br>T3M Type III Medium<br><b>T4M</b> Type IV Medium<br>TFTM Forward Throw Medium | 208 <sup>4</sup><br>240 <sup>4</sup><br>277 <sup>4</sup><br>347 <sup>4,5</sup><br>480 <sup>4,5</sup> |  |   |
|                  |                                    |   |  |   |  | <b>Shipped separately</b> <sup>6</sup><br>BBW Surface-mounted back box (for conduit entry) | <b>PER5</b> Five-wire receptacle only (control ordered separate) <sup>8,9</sup><br><b>PER7</b> Seven-wire receptacle only (control ordered separate) <sup>8,9</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)<br>PIR 180° motion/ambient light sensor, <15' mtg ht <sup>10,11</sup><br>PIRH 180° motion/ambient light sensor, 15-30' mtg ht <sup>10,11</sup><br>PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>11,12</sup><br>PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>11,12</sup> |

### Other Options

### Finish (required)

|  |   |                        |                                  |                           |
|--|---|------------------------|----------------------------------|---------------------------|
| <b>Shipped installed</b>                     | <b>Shipped separately</b> <sup>13</sup> | DDBXD Dark bronze      | DSSXD Sandstone                  | DWHGXD Textured white     |
| SF Single fuse (120, 277, 347V) <sup>3</sup> | BSW Bird-deterrent spikes               | DBLXD Black            | DDBTXD Textured dark bronze      | DSSTXD Textured sandstone |
| DF Double fuse (208, 240, 480V) <sup>3</sup> | VG Vandal guard                         | DNAXD Natural aluminum | DBLBXD Textured black            |                           |
| HS House-side shield <sup>4</sup>            |   | DWHXD White            | DNATXD Textured natural aluminum |                           |
| SPD Separate surge protection <sup>13</sup>  |   |                        |                                  |                           |



## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photozell - SSL twist-lock (120-277V) <sup>14</sup>                   |
| DLL347F 1.5 CUL JU | Photozell - SSL twist-lock (347V) <sup>14</sup>                       |
| DLL480F 1.5 CUL JU | Photozell - SSL twist-lock (480V) <sup>14</sup>                       |
| DSHORT SBK U       | Shorting cap (Included when ordering PER, PERS or PER7) <sup>14</sup> |
| DSXWHS U           | House-side shield (one per light engine)                              |
| DSXWBSW U          | Bird-deterrent spikes   |
| DSXW2VG U          | Vandal guard accessory  |
| DSXW2BBW           | Back box accessory  |
| DBBXD U            | (specify finish)  |

For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- 1000mA is not available with AMBPC.
- AMBPC is not available with 1000mA.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Available with 30 LED/700mA options only (DSXW2 LED 30C 700). DMG option not available.
- Also available as a separate accessory; see Accessories information.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Photozell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Shorting Cap included.
- Reference Motion Sensor table on page 3.
- Reference PER Table on page 3 for functionality.
- PIR and PIR1FC3V specify the [SensorSwitch SBGR-10-ODP](#) control; PIRH and PIRH1FC3V specify the [SensorSwitch SBGR-6-ODP](#) control; see [Motion Sensor Guide](#) for details. Dimming driver standard. Not available with PER5 or PER7. Separate on/off required.
- See the electrical section on page 2 for more details.
- Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item. See PER Table.

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| LEDs             | Drive Current (mA) | System Watts | Dist. Type | 30K    |   |   |   |     | 40K    |   |   |   |     | 50K    |   |   |   |     |
|------------------|--------------------|--------------|------------|--------|---|---|---|-----|--------|---|---|---|-----|--------|---|---|---|-----|
|                  |                    |              |            | Lumens | B | U | G | LPW | Lumens | B | U | G | LPW | Lumens | B | U | G | LPW |
| 20C<br>(20 LEDs) | 350 mA             | 25W          | T2S        | 2,783  | 1 | 0 | 1 | 111 | 2,989  | 1 | 0 | 1 | 120 | 3,008  | 1 | 0 | 1 | 120 |
|                  |                    |              | T2M        | 2,709  | 1 | 0 | 1 | 108 | 2,908  | 1 | 0 | 1 | 116 | 2,926  | 1 | 0 | 1 | 117 |
|                  |                    |              | T3S        | 2,748  | 1 | 0 | 1 | 110 | 2,951  | 1 | 0 | 1 | 118 | 2,969  | 1 | 0 | 1 | 119 |
|                  |                    |              | T3M        | 2,793  | 1 | 0 | 1 | 112 | 2,999  | 1 | 0 | 1 | 120 | 3,018  | 1 | 0 | 1 | 121 |
|                  |                    |              | T4M        | 2,756  | 1 | 0 | 1 | 110 | 2,959  | 1 | 0 | 1 | 118 | 2,977  | 1 | 0 | 1 | 119 |
|                  |                    |              | TFTM       | 2,753  | 1 | 0 | 1 | 110 | 2,956  | 1 | 0 | 1 | 118 | 2,975  | 1 | 0 | 1 | 119 |
|                  | 530 mA             | 36W          | T2S        | 4,030  | 1 | 0 | 1 | 112 | 4,327  | 1 | 0 | 1 | 120 | 4,354  | 1 | 0 | 1 | 121 |
|                  |                    |              | T2M        | 3,920  | 1 | 0 | 1 | 109 | 4,210  | 1 | 0 | 1 | 117 | 4,236  | 1 | 0 | 1 | 118 |
|                  |                    |              | T3S        | 3,978  | 1 | 0 | 1 | 111 | 4,272  | 1 | 0 | 1 | 119 | 4,299  | 1 | 0 | 1 | 119 |
|                  |                    |              | T3M        | 4,044  | 1 | 0 | 2 | 112 | 4,343  | 1 | 0 | 2 | 121 | 4,370  | 1 | 0 | 2 | 121 |
|                  |                    |              | T4M        | 3,990  | 1 | 0 | 1 | 111 | 4,284  | 1 | 0 | 1 | 119 | 4,310  | 1 | 0 | 1 | 120 |
|                  |                    |              | TFTM       | 3,987  | 1 | 0 | 1 | 111 | 4,281  | 1 | 0 | 1 | 119 | 4,308  | 1 | 0 | 1 | 120 |
|                  | 700 mA             | 47W          | T2S        | 5,130  | 1 | 0 | 1 | 109 | 5,509  | 1 | 0 | 1 | 117 | 5,544  | 1 | 0 | 1 | 118 |
|                  |                    |              | T2M        | 4,991  | 1 | 0 | 2 | 106 | 5,360  | 1 | 0 | 2 | 114 | 5,393  | 1 | 0 | 2 | 115 |
|                  |                    |              | T3S        | 5,066  | 1 | 0 | 1 | 108 | 5,440  | 1 | 0 | 1 | 116 | 5,474  | 1 | 0 | 1 | 116 |
|                  |                    |              | T3M        | 5,148  | 1 | 0 | 2 | 110 | 5,529  | 1 | 0 | 2 | 118 | 5,563  | 1 | 0 | 2 | 118 |
|                  |                    |              | T4M        | 5,080  | 1 | 0 | 2 | 108 | 5,455  | 1 | 0 | 2 | 116 | 5,488  | 1 | 0 | 2 | 117 |
|                  |                    |              | TFTM       | 5,075  | 1 | 0 | 2 | 108 | 5,450  | 1 | 0 | 2 | 116 | 5,484  | 1 | 0 | 2 | 117 |
|                  | 1000 mA            | 73W          | T2S        | 7,147  | 2 | 0 | 2 | 98  | 7,675  | 2 | 0 | 2 | 105 | 7,723  | 1 | 0 | 1 | 104 |
|                  |                    |              | T2M        | 6,954  | 2 | 0 | 2 | 95  | 7,467  | 2 | 0 | 2 | 102 | 7,514  | 2 | 0 | 2 | 103 |
|                  |                    |              | T3S        | 7,057  | 1 | 0 | 2 | 97  | 7,579  | 1 | 0 | 2 | 104 | 7,627  | 1 | 0 | 2 | 104 |
|                  |                    |              | T3M        | 7,172  | 2 | 0 | 3 | 98  | 7,702  | 2 | 0 | 3 | 106 | 7,751  | 2 | 0 | 3 | 106 |
|                  |                    |              | T4M        | 7,076  | 1 | 0 | 2 | 97  | 7,599  | 1 | 0 | 2 | 104 | 7,646  | 1 | 0 | 2 | 105 |
|                  |                    |              | TFTM       | 7,071  | 1 | 0 | 2 | 97  | 7,594  | 1 | 0 | 2 | 104 | 7,641  | 1 | 0 | 2 | 105 |
| 30C<br>(30 LEDs) | 350 mA             | 36W          | T2S        | 4,160  | 1 | 0 | 1 | 116 | 4,467  | 1 | 0 | 1 | 124 | 4,494  | 1 | 0 | 1 | 125 |
|                  |                    |              | T2M        | 4,048  | 1 | 0 | 1 | 112 | 4,346  | 1 | 0 | 2 | 121 | 4,373  | 1 | 0 | 2 | 121 |
|                  |                    |              | T3S        | 4,108  | 1 | 0 | 1 | 114 | 4,411  | 1 | 0 | 1 | 123 | 4,438  | 1 | 0 | 1 | 123 |
|                  |                    |              | T3M        | 4,174  | 1 | 0 | 2 | 116 | 4,483  | 1 | 0 | 2 | 125 | 4,510  | 1 | 0 | 2 | 125 |
|                  |                    |              | T4M        | 4,119  | 1 | 0 | 1 | 114 | 4,423  | 1 | 0 | 2 | 123 | 4,450  | 1 | 0 | 2 | 124 |
|                  |                    |              | TFTM       | 4,115  | 1 | 0 | 1 | 114 | 4,419  | 1 | 0 | 1 | 123 | 4,446  | 1 | 0 | 1 | 124 |
|                  | 530 mA             | 54W          | T2S        | 6,001  | 1 | 0 | 1 | 111 | 6,444  | 1 | 0 | 1 | 119 | 6,484  | 1 | 0 | 1 | 120 |
|                  |                    |              | T2M        | 5,838  | 1 | 0 | 2 | 108 | 6,270  | 2 | 0 | 2 | 116 | 6,308  | 2 | 0 | 2 | 117 |
|                  |                    |              | T3S        | 5,926  | 1 | 0 | 2 | 110 | 6,364  | 1 | 0 | 2 | 118 | 6,403  | 1 | 0 | 2 | 119 |
|                  |                    |              | T3M        | 6,023  | 1 | 0 | 2 | 112 | 6,467  | 1 | 0 | 2 | 120 | 6,507  | 1 | 0 | 2 | 121 |
|                  |                    |              | T4M        | 5,942  | 1 | 0 | 2 | 110 | 6,380  | 1 | 0 | 2 | 118 | 6,420  | 1 | 0 | 2 | 119 |
|                  |                    |              | TFTM       | 5,937  | 1 | 0 | 2 | 110 | 6,376  | 1 | 0 | 2 | 118 | 6,415  | 1 | 0 | 2 | 119 |
|                  | 700 mA             | 71W          | T2S        | 7,403  | 2 | 0 | 2 | 104 | 8,170  | 2 | 0 | 2 | 115 | 8,221  | 2 | 0 | 2 | 116 |
|                  |                    |              | T2M        | 7,609  | 2 | 0 | 2 | 107 | 7,949  | 2 | 0 | 2 | 112 | 7,998  | 2 | 0 | 2 | 113 |
|                  |                    |              | T3S        | 7,513  | 1 | 0 | 2 | 106 | 8,068  | 1 | 0 | 2 | 114 | 8,118  | 1 | 0 | 2 | 114 |
|                  |                    |              | T3M        | 7,635  | 2 | 0 | 3 | 108 | 8,199  | 2 | 0 | 3 | 115 | 8,250  | 2 | 0 | 3 | 116 |
|                  |                    |              | T4M        | 7,534  | 1 | 0 | 2 | 106 | 8,089  | 1 | 0 | 2 | 114 | 8,140  | 1 | 0 | 2 | 115 |
|                  |                    |              | TFTM       | 7,527  | 1 | 0 | 2 | 106 | 8,082  | 2 | 0 | 2 | 114 | 8,134  | 2 | 0 | 2 | 115 |
|                  | 1000 mA            | 109W         | T2S        | 10,468 | 2 | 0 | 2 | 96  | 11,241 | 2 | 0 | 2 | 103 | 11,311 | 2 | 0 | 2 | 104 |
|                  |                    |              | T2M        | 10,184 | 2 | 0 | 3 | 93  | 10,936 | 2 | 0 | 3 | 100 | 11,005 | 2 | 0 | 3 | 101 |
|                  |                    |              | T3S        | 10,335 | 2 | 0 | 2 | 95  | 11,099 | 2 | 0 | 2 | 102 | 11,169 | 2 | 0 | 2 | 102 |
|                  |                    |              | T3M        | 10,505 | 2 | 0 | 3 | 96  | 11,280 | 2 | 0 | 3 | 103 | 11,351 | 2 | 0 | 3 | 104 |
|                  |                    |              | T4M        | 10,365 | 2 | 0 | 2 | 95  | 11,129 | 2 | 0 | 2 | 102 | 11,198 | 2 | 0 | 2 | 103 |
|                  |                    |              | TFTM       | 10,356 | 2 | 0 | 2 | 95  | 11,121 | 2 | 0 | 3 | 102 | 11,190 | 2 | 0 | 3 | 103 |

### Note:

Available with phosphor-converted amber LED's (nomenclature AMBPC). These LED's produce light with 97+% >530 nm. Output can be calculated by applying a 0.7 factor to 4000 K lumen values and photometric files.



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.02             |
| 10°C        | 50°F        | 1.01             |
| 20°C        | 68°F        | 1.00             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 1.00             |
| 40°C        | 104°F       | 0.98             |

### Electrical Load

| LEDs | Drive Current (mA) | System Watts | Current (A) |      |      |      |      |      |
|------|--------------------|--------------|-------------|------|------|------|------|------|
|      |                    |              | 120V        | 208V | 240V | 277V | 347V | 480V |
| 20C  | 350                | 25 W         | 0.23        | 0.13 | 0.12 | 0.10 | -    | -    |
|      | 530                | 36 W         | 0.33        | 0.19 | 0.17 | 0.14 | -    | -    |
|      | 700                | 47 W         | 0.44        | 0.25 | 0.22 | 0.19 | -    | -    |
|      | 1000               | 74 W         | 0.68        | 0.39 | 0.34 | 0.29 | -    | -    |
| 30C  | 350                | 36 W         | 0.33        | 0.19 | 0.17 | 0.14 | -    | -    |
|      | 530                | 54 W         | 0.50        | 0.29 | 0.25 | 0.22 | -    | -    |
|      | 700                | 71 W         | 0.66        | 0.38 | 0.33 | 0.28 | 0.23 | 0.16 |
|      | 1000               | 109 W        | 1.01        | 0.58 | 0.50 | 0.44 | -    | -    |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW2 LED 30C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours          | 0   | 25,000 | 50,000 | 100,000 |
|--------------------------|-----|--------|--------|---------|
| Lumen Maintenance Factor | 1.0 | 0.95   | 0.92   | 0.87    |

### Motion Sensor Default Settings

| Option                | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|-----------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| *PIR or PIRH          | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use with Inline Dusk to Dawn or timer

### PER Table

| Control                    | PER (3 wire) | PER5 (5 wire) |                                  | PER7 (7 wire) |                                  |                             |
|----------------------------|--------------|---------------|----------------------------------|---------------|----------------------------------|-----------------------------|
|                            |              |               | Wire 4/Wire5                     |               | Wire 4/Wire5                     | Wire 6/Wire7                |
| Photocontrol Only (On/Off) | ✓            | ⚠             | Wired to dimming leads on driver | ⚠             | Wired to dimming leads on driver | Wires Capped inside fixture |
| ROAM                       | ⊘            | ✓             | Wired to dimming leads on driver | ⚠             | Wired to dimming leads on driver | Wires Capped inside fixture |
| ROAM with Motion           | ⊘            | ⚠             | Wired to dimming leads on driver | ⚠             | Wired to dimming leads on driver | Wires Capped inside fixture |
| Futureproof*               | ⊘            | ⚠             | Wired to dimming leads on driver | ✓             | Wired to dimming leads on driver | Wires Capped inside fixture |
| Futureproof* with Motion   | ⊘            | ⚠             | Wired to dimming leads on driver | ✓             | Wired to dimming leads on driver | Wires Capped inside fixture |


✓ Recommended

⊘ Will not work


⚠ Alternate

\*Futureproof means: Ability to change controls in the future.

Isofootcandle plots for the DSXW2 LED 30C 1000 40K. Distances are in units of mounting height (25').

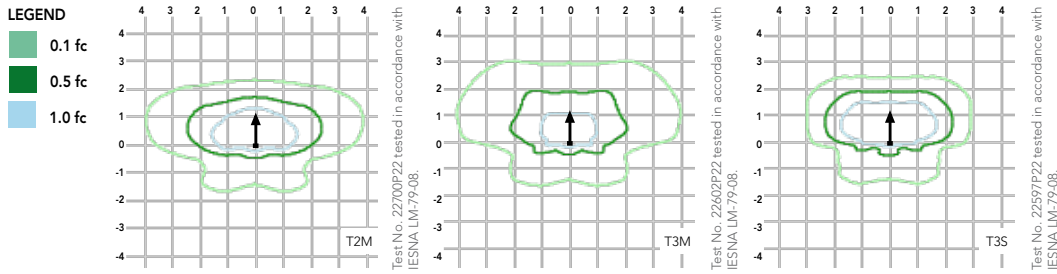

Distribution overlay comparison to 400W metal halide.

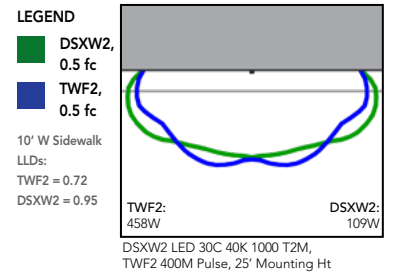

## FEATURES & SPECIFICATIONS

### INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 2 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

### CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

### ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L87/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

### INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

### LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org](http://www.designlights.org) to confirm which versions are qualified.

### WARRANTY

Five-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



# CNY LED

## LED Canopy/Ceiling Luminaire



Catalog Number

---

Notes

---

Type

---

Hit the Tab key or mouse over the page to see all interactive elements.

### Specifications

|         | CNY LED P0/P1/P2 | CNY LED P3/P4 |
|---------|------------------|---------------|
| Width:  | 10"              | 14"           |
| Height: | 4.5"             | 6"            |
| Depth:  | 10"              | 14"           |
| Weight: | 6.5lbs           | 13lbs         |

### Introduction

The CNY LED canopy luminaires are energy efficient and budget friendly, perfect for replacing up to 400W metal halide luminaires while saving up to 80% energy costs. Quick mount mechanism significantly reduces the installation time. An LED array and translucent lens create uniform and visually comfortable illumination. CNY LED luminaires are DLC Premium listed and deliver quick payback!

## Ordering Information

**EXAMPLE: CNY LED P1 50K MVOLT DDB**

| CNY LED |  |   |                                   |  |
|---------|--|---|-----------------------------------|--|
| Series  | Performance Package  | Color Temperature <sup>3</sup>            | Voltage                           | Finish                                   |
| CNY LED | <b>P0</b> 3,500 lumens <sup>1</sup><br>P1 4,500 lumens <sup>2</sup><br>P2 6,600 lumens<br>P3 11,100 lumens<br>P4 14,000 lumens | 40K 4000K<br><b>50K 5000K<sup>4</sup></b> | <b>MVOLT<sup>5</sup></b> 120-277V | DDB Dark bronze<br>WH <sup>6</sup> White |

**Accessories**  
 Ordered and shipped separately.  
 CNYBCP 14 Inch x 14 Inch Beauty Cover Plate

- NOTES**
1. The combination of P0 50K WH is not available.
  2. Not available in 50K.
  3. Correlated color temperature (CCT) shown is nominal per ANSI C78, 377-2008.
  4. Not available in P1 performance package.
  5. MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
  6. Available with P0 or P1 only.

### FEATURES & SPECIFICATIONS

**INTENDED USE**  
 CNY LED luminaires are ideal, energy-efficient replacements for up to 400W MH canopy or ceiling luminaires. The CNY LED provides years of maintenance-free illumination for schools, malls, offices, parking areas, covered walkways and loading docks.

**CONSTRUCTION**  
 Cast-aluminum, corrosion-resistant housing with polyester powder paint for lasting durability. Castings are sealed with a one-piece gasket. Rated for outdoor installations, -40°C minimum ambient. Frosted lens is designed for uniform light distribution.

**ELECTRICAL**  
 Includes an MVOLT (120-277V) driver. LEDs maintain 70% of light output at 50,000 or more hours of service life (L70/50,000 hours).

**INSTALLATION**  
 Mounts to a recessed junction box or surface mount with three conduit entry points. Can be pendant mounted with ¾ NPT pendant stem provided by others. Quick mount mechanism significantly reduces installation time - no need to open the luminaire for installation.

**LISTINGS**  
 UL Listed to U.S. and Canadian safety standards for wet locations. Tested in accordance with IESNA LM-79 and LM-80 standards. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified. Can be used to comply with California Title 24 Part 6 High Efficacy LED light Source Requirements.

**WARRANTY**  
 Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.




# Photometric Diagrams

Full photometric data report available within 2 weeks from request. Contact [Acuity Tech Support](#).


CNY LED - Mounting height = 10

## LEGEND


- 0.1 fc
- 0.2 fc
- 0.5 fc
- 1.0 fc




CNY LED P0




CNY LED P1



CNY LED P2

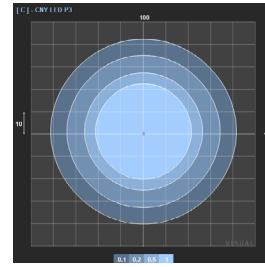

CNY LED P3






CNY LED P4

# Performance Data

| Performance Package | Lumens | Input Power | Lumens Per Watt |
|---------------------|--------|-------------|-----------------|
| CNY LED P0          | 3,500  | 27W         | 130             |
| CNY LED P1          | 4,500  | 35W         | 127             |
| CNY LED P2          | 6,600  | 52W         | 128             |
| CNY LED P3          | 11,000 | 86W         | 128             |
| CNY LED P4          | 13,900 | 109W        | 128             |

# Line Art

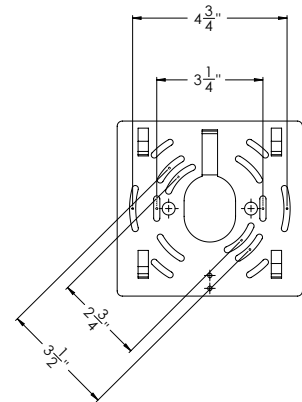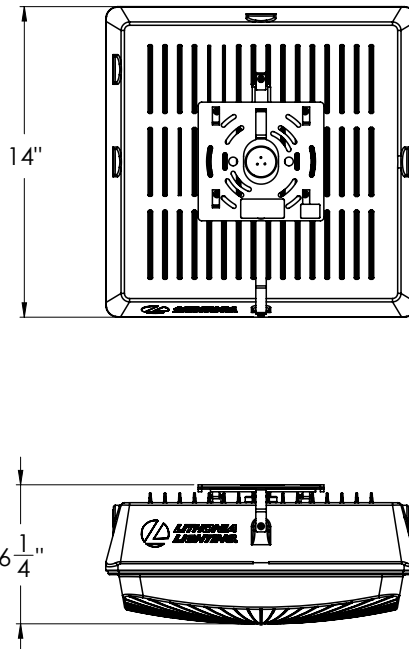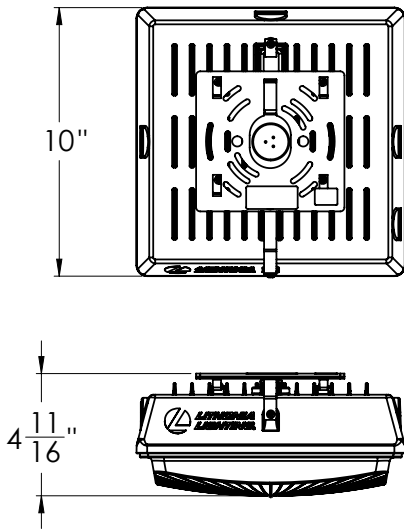





# CNY LED

## LED Canopy/Ceiling Luminaire



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Specifications

|                | CNY LED P0/P1/P2 | CNY LED P3/P4 |
|----------------|------------------|---------------|
| <b>Width:</b>  | 10"              | 14"           |
| <b>Height:</b> | 4.5"             | 6"            |
| <b>Depth:</b>  | 10"              | 14"           |
| <b>Weight:</b> | 6.5lbs           | 13lbs         |

### Introduction

The CNY LED canopy luminaires are energy efficient and budget friendly, perfect for replacing up to 400W metal halide luminaires while saving up to 80% energy costs. Quick mount mechanism significantly reduces the installation time. An LED array and translucent lens create uniform and visually comfortable illumination. CNY LED luminaires are DLC Premium listed and deliver quick payback!

### Ordering Information

**EXAMPLE: CNY LED P1 50K MVOLT DDB**

| CNY LED        |   |   |                                   |  |
|----------------|---|---|-----------------------------------|--|
| Series         | Performance Package   | Color Temperature <sup>3</sup>            | Voltage                           | Finish                                   |
| <b>CNY LED</b> | P0 3,500 lumens <sup>1</sup><br><b>P1 4,500 lumens<sup>2</sup></b><br>P2 6,600 lumens<br>P3 11,100 lumens<br>P4 14,000 lumens | 40K 4000K<br><b>50K 5000K<sup>4</sup></b> | <b>MVOLT<sup>5</sup> 120-277V</b> | DDB Dark bronze<br>WH <sup>6</sup> White |

#### Accessories

Ordered and shipped separately.

CNYBCP 14 Inch x 14 Inch Beauty Cover Plate

#### NOTES

1. The combination of P0 50K WH is not available.
2. Not available in 50K.
3. Correlated color temperature (CCT) shown is nominal per ANSI C78, 377-2008.
4. Not available in P1 performance package.
5. MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
6. Available with P0 or P1 only.

### FEATURES & SPECIFICATIONS

#### INTENDED USE

CNY LED luminaires are ideal, energy-efficient replacements for up to 400W MH canopy or ceiling luminaires. The CNY LED provides years of maintenance-free illumination for schools, malls, offices, parking areas, covered walkways and loading docks.

#### CONSTRUCTION

Cast-aluminum, corrosion-resistant housing with polyester powder paint for lasting durability. Castings are sealed with a one-piece gasket. Rated for outdoor installations, -40°C minimum ambient. Frosted lens is designed for uniform light distribution.

#### ELECTRICAL

Includes an MVOLT (120-277V) driver. LEDs maintain 70% of light output at 50,000 or more hours of service life (L70/50,000 hours).

#### INSTALLATION

Mounts to a recessed junction box or surface mount with three conduit entry points. Can be pendant mounted with ¾ NPT pendant stem provided by others. Quick mount mechanism significantly reduces installation time - no need to open the luminaire for installation.

#### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations. Tested in accordance with IESNA LM-79 and LM-80 standards. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified. Can be used to comply with California Title 24 Part 6 High Efficacy LED light Source Requirements.

#### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.




# Photometric Diagrams

Full photometric data report available within 2 weeks from request. Contact [Acuity Tech Support](#).


CNY LED - Mounting height = 10

## LEGEND


- 0.1 fc
- 0.2 fc
- 0.5 fc
- 1.0 fc




CNY LED P0




CNY LED P1



CNY LED P2



CNY LED P3






CNY LED P4

# Performance Data

| Performance Package | Lumens | Input Power | Lumens Per Watt |
|---------------------|--------|-------------|-----------------|
| CNY LED P0          | 3,500  | 27W         | 130             |
| CNY LED P1          | 4,500  | 35W         | 127             |
| CNY LED P2          | 6,600  | 52W         | 128             |
| CNY LED P3          | 11,000 | 86W         | 128             |
| CNY LED P4          | 13,900 | 109W        | 128             |

# Line Art

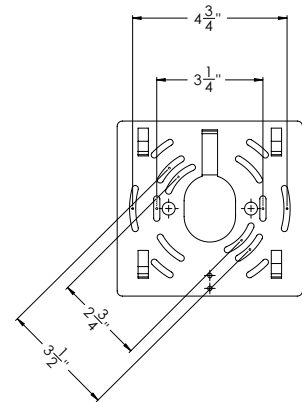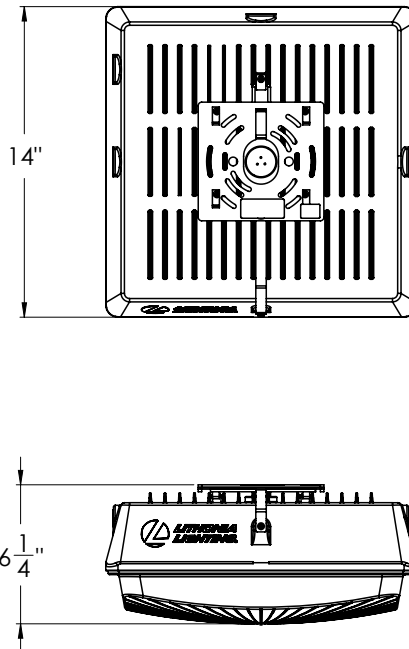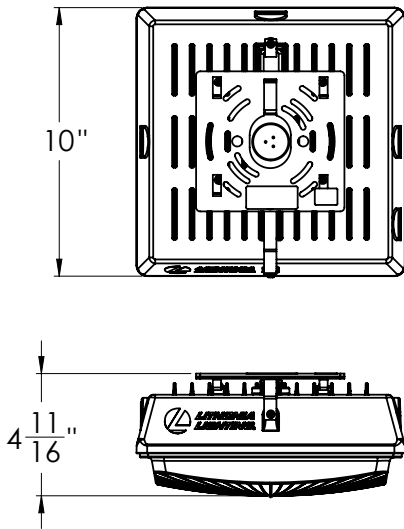



# CNY LED

## LED Canopy/Ceiling Luminaire



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Specifications

|                | CNY LED P0/P1/P2 | CNY LED P3/P4 |
|----------------|------------------|---------------|
| <b>Width:</b>  | 10"              | 14"           |
| <b>Height:</b> | 4.5"             | 6"            |
| <b>Depth:</b>  | 10"              | 14"           |
| <b>Weight:</b> | 6.5lbs           | 13lbs         |

### Introduction

The CNY LED canopy luminaires are energy efficient and budget friendly, perfect for replacing up to 400W metal halide luminaires while saving up to 80% energy costs. Quick mount mechanism significantly reduces the installation time. An LED array and translucent lens create uniform and visually comfortable illumination. CNY LED luminaires are DLC Premium listed and deliver quick payback!

### Ordering Information

**EXAMPLE: CNY LED P1 50K MVOLT DDB**

| CNY LED        |  |   |                                   |  |
|----------------|--|---|-----------------------------------|--|
| Series         | Performance Package  | Color Temperature <sup>3</sup>            | Voltage                           | Finish                                   |
| <b>CNY LED</b> | P0 3,500 lumens <sup>1</sup><br>P1 4,500 lumens <sup>2</sup><br><b>P2 6,600 lumens</b><br>P3 11,100 lumens<br>P4 14,000 lumens | 40K 4000K<br><b>50K 5000K<sup>4</sup></b> | <b>MVOLT<sup>5</sup> 120-277V</b> | DDB Dark bronze<br>WH <sup>6</sup> White |

#### Accessories

Ordered and shipped separately.

CNYBCP 14 Inch x 14 Inch Beauty Cover Plate

#### NOTES

1. The combination of P0 50K WH is not available.
2. Not available in 50K.
3. Correlated color temperature (CCT) shown is nominal per ANSI C78, 377-2008.
4. Not available in P1 performance package.
5. MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
6. Available with P0 or P1 only.

### FEATURES & SPECIFICATIONS

#### INTENDED USE

CNY LED luminaires are ideal, energy-efficient replacements for up to 400W MH canopy or ceiling luminaires. The CNY LED provides years of maintenance-free illumination for schools, malls, offices, parking areas, covered walkways and loading docks.

#### CONSTRUCTION

Cast-aluminum, corrosion-resistant housing with polyester powder paint for lasting durability. Castings are sealed with a one-piece gasket. Rated for outdoor installations, -40°C minimum ambient. Frosted lens is designed for uniform light distribution.

#### ELECTRICAL

Includes an MVOLT (120-277V) driver. LEDs maintain 70% of light output at 50,000 or more hours of service life (L70/50,000 hours).

#### INSTALLATION

Mounts to a recessed junction box or surface mount with three conduit entry points. Can be pendant mounted with ¾ NPT pendant stem provided by others. Quick mount mechanism significantly reduces installation time - no need to open the luminaire for installation.

#### LISTINGS

UL Listed to U.S. and Canadian safety standards for wet locations. Tested in accordance with IESNA LM-79 and LM-80 standards. DesignLights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified. Can be used to comply with California Title 24 Part 6 High Efficacy LED light Source Requirements.

#### WARRANTY

Five-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.




# Photometric Diagrams

Full photometric data report available within 2 weeks from request. Contact [Acuity Tech Support](#).


CNY LED - Mounting height = 10

## LEGEND


- 0.1 fc
- 0.2 fc
- 0.5 fc
- 1.0 fc




CNY LED P0




CNY LED P1

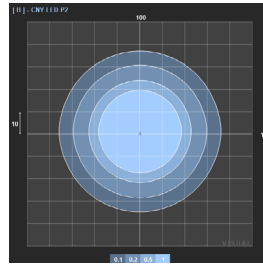

CNY LED P2



CNY LED P3






CNY LED P4

# Performance Data

| Performance Package | Lumens | Input Power | Lumens Per Watt |
|---------------------|--------|-------------|-----------------|
| CNY LED P0          | 3,500  | 27W         | 130             |
| CNY LED P1          | 4,500  | 35W         | 127             |
| CNY LED P2          | 6,600  | 52W         | 128             |
| CNY LED P3          | 11,000 | 86W         | 128             |
| CNY LED P4          | 13,900 | 109W        | 128             |

# Line Art

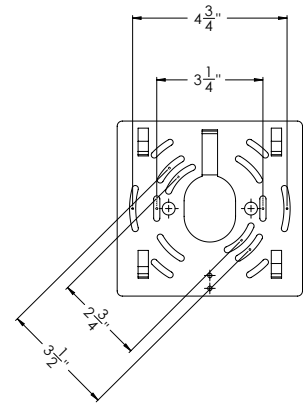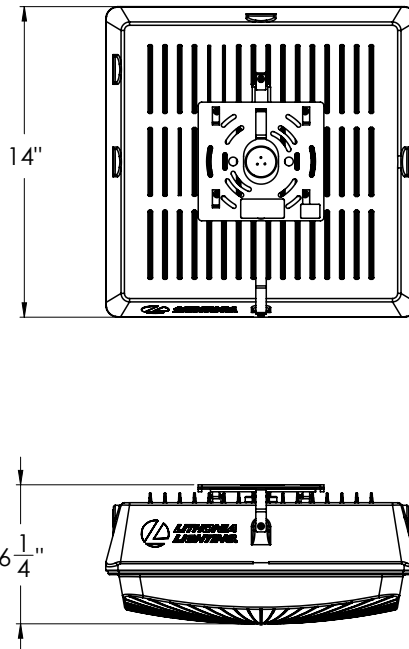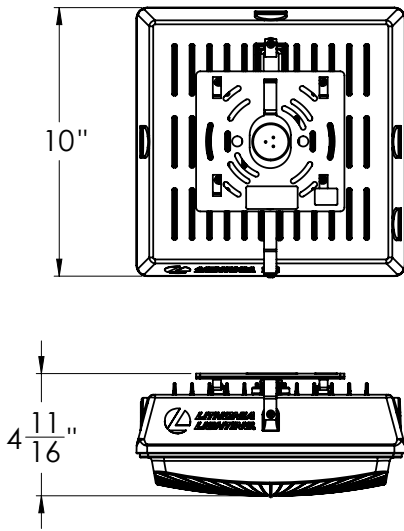



## FEATURES & SPECIFICATIONS

**INTENDED USE** — Typical applications include corridors, lobbies, conference rooms and private offices.

**CONSTRUCTION** — Galvanized steel mounting/plaster frame; galvanized steel junction box with bottom-hinged access covers and spring latches. Reflectors are retained by torsion springs.

Vertically adjustable mounting brackets with commercial bar hangers provide 3-3/4" total adjustment. Two combination 1/2"-3/4" and four 1/2" knockouts for straight-through conduit runs. Capacity: 8 (4 in, 4 out). No. 12 AWG conductors, rated for 90°C.

Accommodates 12"-24" joist spacing.

Passive cooling thermal management for 25°C standard; high ambient (40°C) option available. Light engine and drivers are accessible from above or below ceiling.

Max ceiling thickness 1-1/2".

**OPTICS** — LEDs are binned to a 3-step SDCM; 80 CRI minimum. 90 CRI optional.

LED light source concealed with diffusing optical lens.

General illumination lighting with 1.0 S/MH and 55° cutoff to source and source image.

Self-flanged anodized reflectors in specular, semi-specular, or matte diffuse finishes. Also available in white and black painted reflectors.

**ELECTRICAL** — Multi-volt (120-277V, 50/60Hz) 0-10V dimming drivers mounted to junction box, 10% or 1% minimum dimming level available.

0-10V dimming fixture requires two (2) additional low-voltage wires to be pulled.

70% lumen maintenance at 60,000 hours.

**LISTINGS** — Certified to US and Canadian safety standards. Wet location standard (covered ceiling). IP55 rated. ENERGY STAR® certified product.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at:

[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.



All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

# LDN6

**6" OPEN and WALLWASH LED  
Non-IC  
New Construction Downlight**

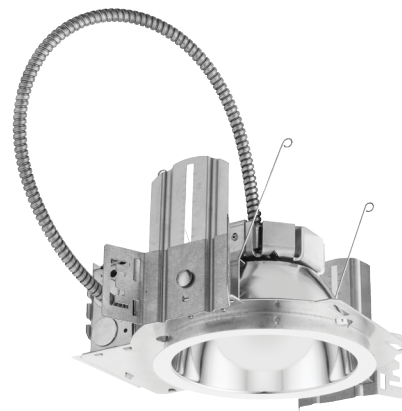

### ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** LDN6 35/15 L06AR LSS MVOLT EZ10

| LDN6          |               | Color temperature |           | Lumens <sup>1</sup>   |                | Aperture/Trim Color  |                              | Finish                   |                         | Voltage               |  |
|---------------|---------------|-------------------|-----------|-----------------------|----------------|----------------------|------------------------------|--------------------------|-------------------------|-----------------------|--|
| <b>Series</b> | LDN6 6" round | 27/ 2700K         | 30/ 3000K | 05 500 lumens         | 25 2500 lumens | <b>L06</b> Downlight | <b>AR</b> Clear              | <b>LSS</b> Semi-specular | <b>MVOLT</b> Multi-volt | 120 120V              |  |
|               |               | 35/ 3500K         | 40/ 4000K | <b>10</b> 1000 lumens | 30 3000 lumens | <b>LW6</b> Wallwash  | <b>WR</b> <sup>2</sup> White | <b>LD</b> Matte diffuse  |                         | 277 277V              |  |
|               |               | 50/ 5000K         |           | 15 1500 lumens        | 40 4000 lumens |                      | <b>BR</b> <sup>2</sup> Black | <b>LS</b> Specular       |                         | 347 <sup>3</sup> 347V |  |
|               |               |                   |           | 20 2000 lumens        | 50 5000 lumens |                      |                              |                          |                         |                       |  |

| Driver  | Options   |
|---|---|
| GZ10 0-10V driver dims to 10%   | SF <sup>4</sup> Single fuse   |
| GZ1 0-10V driver dims to 1%   | TRW <sup>5</sup> White painted flange   |
| EZ10 0-10V eldoLED driver with smooth and flicker-free deep dimming performance down to 10% | TRBL <sup>5</sup> Black painted flange  |
| EZ1 0-10V eldoLED driver with smooth and flicker-free deep dimming performance down to 1%   | EL <sup>6</sup> Emergency battery pack with integral test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS   |
|   | ELR <sup>6</sup> Emergency battery pack with remote test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS  |
|   | ELSD <sup>6</sup> Emergency battery pack with self-diagnostics, integral test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS   |
|   | ELRSD <sup>6</sup> Emergency battery pack with self-diagnostics, remote test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS  |
|   | E10WCP <sup>6</sup> Emergency battery pack, 10W Constant Power with integral test switch. Certified in CA Title 20 MAEDB  |
|   | E10WCPR <sup>6</sup> Emergency battery pack, 10W Constant Power with remote test switch. Certified in CA Title 20 MAEDB   |
|   | NPP16D <sup>7</sup> nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1).  |
|   | NPP16DER <sup>7</sup> nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1). ER controls fixtures on emergency circuit.   |
|   | N80 <sup>8</sup> nLight™ Lumen Compensation   |
|   | NPS80EZ <sup>7</sup> nLight® dimming pack controls 0-10V eldoLED drivers (EZ10, EZ1).   |
|   | NPS80EZER <sup>7</sup> nLight® dimming pack controls 0-10V eldoLED drivers (EZ10, EZ1). ER controls fixtures on emergency circuit.  |
|   | HAO <sup>11</sup> High ambient option   |
|   | CP <sup>12</sup> Chicago Plenum   |
|   | RRL___ RELOC®-ready luminaire connectors enable a simple and consistent factory installed option across all ABL luminaire brands. Refer to RRL for complete nomenclature. Available only in RRLA, RRLB, RRLAE, and RRLC12S. |
|   | NLTAIR2 <sup>9,10</sup> nLight® Air enabled   |
|   | NLTAIRER2 <sup>9,10</sup> nLight® AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit, not available with battery pack options   |
|   | USPOM US point of manufacture   |
|   | 90CRI High CRI (90+)  |

| Accessories: Order as separate catalog number. |   |
|--|---|
| <a href="#">EAC ISSM 375</a>                   | Compact interruptible emergency AC power system                             |
| <a href="#">EAC ISSM 125</a>                   | Compact interruptible emergency AC power system                             |
| GRA68 JZ                                       | Oversized trim ring with 8" outside diameter <sup>1</sup>                   |
| SCA6   | Sloped ceiling adapter. Refer to <a href="#">TECH-SCA</a> for more options. |

### Notes


- Overall height varies based on lumen package; refer to dimensional chart on page 3.
- Not available with finishes.
- Not available with emergency options.
- Must specify voltage 120V or 277V.
- Available with clear (AR) reflector only.
- 12.5" of plenum depth or top access required for battery pack maintenance.
- Specify voltage. ER for use with generator supply EM power. Will require an emergency hot feed and normal hot feed.
- Fixture begins at 80% light level. Must be specified with NPS80EZ or NPS80EZ ER. Only available with EZ10 and EZ1 drivers.
- Not available with CP, NPS80EZ, NPS80EZER, NPP16D, NPP16DER or N80 options.
- NLTAIR2 and NLTAIRER2 not recommended for metal ceiling installations.
- Fixture height is 6.5" for all lumen packages with HAO.
- Must specify voltage for 3000lm. 5000lm with marked spacing 24 L x 24 W x 14 H. Not available with emergency battery pack option.

# LDN6


## PHOTOMETRY

**Distribution Curve      Distribution Data      Output Data      Coefficient of Utilization      Illuminance Data at 30" Above Floor for a Single Luminaire**


**LDN6 35/10 L06AR**, input watts: 10.44, delivered lumens: 987.10, LM/W = 94.54, spacing criterion at 0= 1.02, test no. ISF 30716P262.

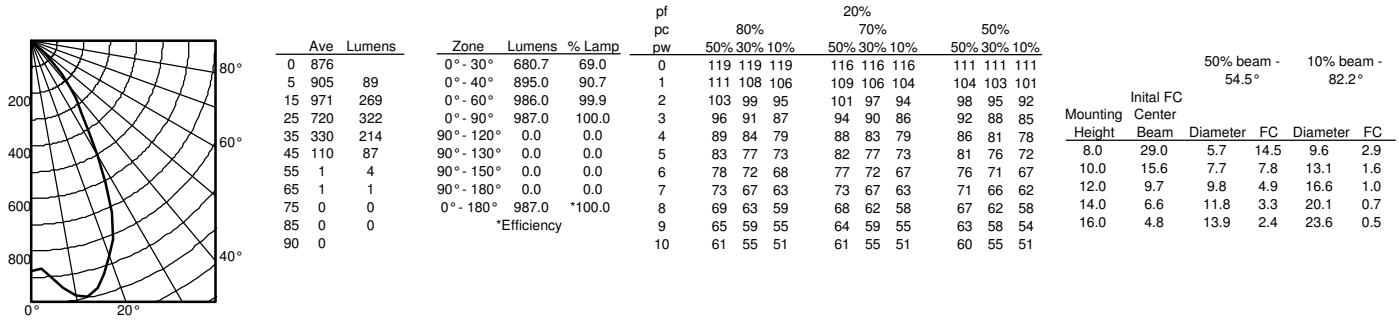

**LDN6 35/15 L06AR**, input watts: 17.52, delivered lumens: 1572.9, LM/W = 89.77, spacing criterion at 0= 1.02, test no. ISF 30716P265.

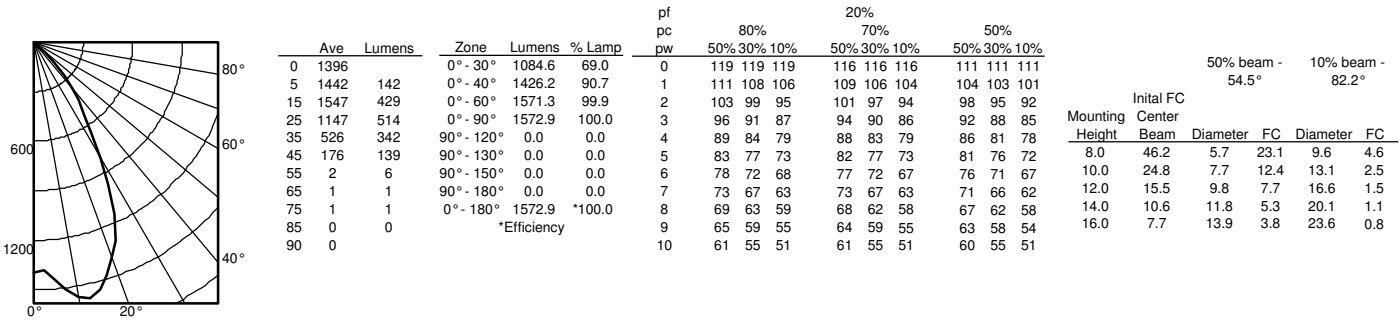

**LDN6 35/30 L06AR**, input watts: 34.75, delivered lumens: 3138.5, LM/W = 90.31, spacing criterion at 0= 1.02, test no. ISF 30716P274.

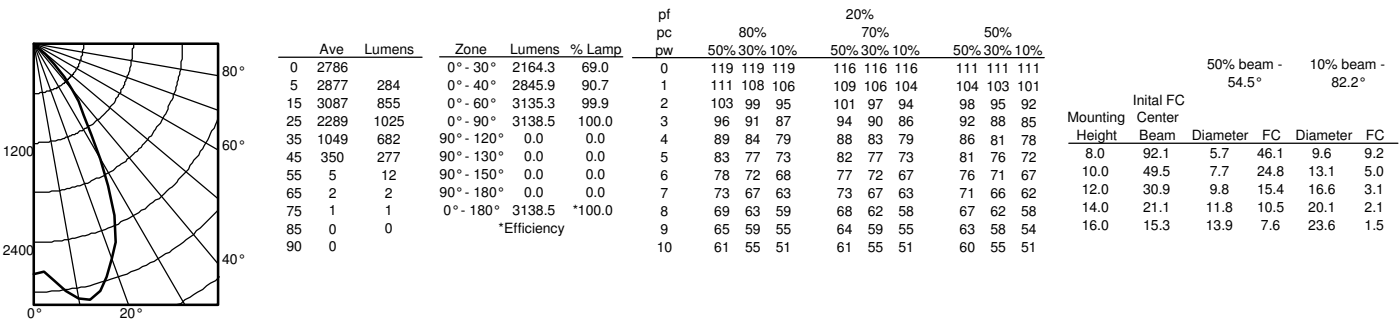




# LDN6


\* All dimensions are inches (centimeters) unless otherwise noted.

## LDN6 500-1500 LUMEN

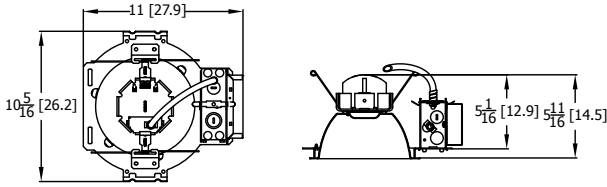


Aperture: 6-1/4 (15.9)  
Ceiling Opening: 7-1/8 (18.1)  
Overlap trim: 7-1/2 (19.1)

## LDN6 2000-3000 LUMEN

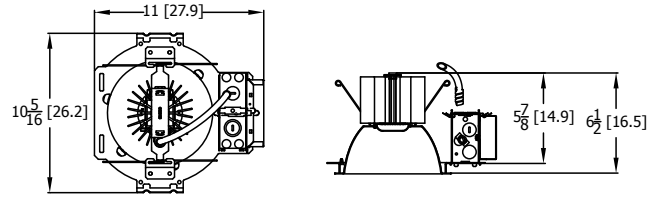


Aperture: 6-1/4 (15.9)  
Ceiling Opening: 7-1/8 (18.1)  
Overlap trim: 7-1/2 (19.1)

## LDN6 4000-5000 LUMEN

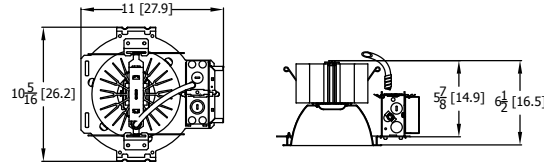


Marked Spacing: 24 x 24 x 10  
Aperture: 6-1/4 (15.9)  
Ceiling Opening: 7-1/8 (18.1)  
Overlap trim: 7-1/2 (19.1)

## LDN6 CP

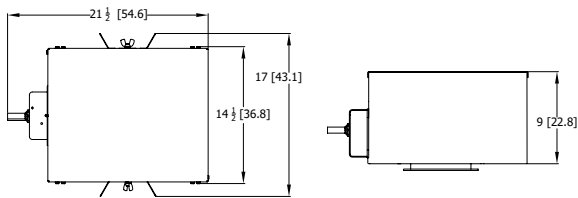

Aperture: 6-1/4" (15.9)  
Ceiling Opening: 7-1/8" (18.1)  
Overlap trim: 7-1/2" (19.1)

## LDN6 EL-ELR

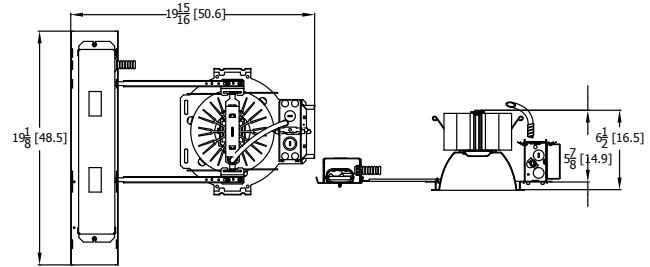

Marked Spacing above 3000 lumen: 24 x 24 x 10  
Aperture: 6-1/4 (15.9)  
Ceiling Opening: 7-1/8 (18.1)  
Overlap trim: 7-1/2 (19.1)

| LDN6           |        |         |      |
|----------------|--------|---------|------|
| Nominal Lumens | Lumens | Wattage | Lm/W |
| 500            | 527.9  | 5.8     | 90.5 |
| 750            | 758.1  | 8.9     | 85.1 |
| 1000           | 950.1  | 10.4    | 91.0 |
| 1500           | 1514   | 17.5    | 86.4 |
| 2000           | 2006   | 22.5    | 89.1 |
| 2500           | 2504   | 28.3    | 88.6 |
| 3000           | 3021   | 34.8    | 86.9 |
| 4000           | 4008   | 44.3    | 90.6 |
| 5000           | 4975   | 57.7    | 86.3 |

### HOW TO ESTIMATE DELIVERED LUMENS IN EMERGENCY MODE

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$

P = Output power of emergency driver. P = 10W for PS1055CP

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

The LPW rating is also available at [Designlight Consortium](http://Designlight Consortium).

|                     | LUMEN OUTPUT MULTIPLIERS - FINISH |            |            |
|---------------------|-----------------------------------|------------|------------|
|                     | Clear (AR)                        | White (WR) | Black (BR) |
| Specular (LS)       | 1.0                               | N/A        | N/A        |
| Semi-specular (LSS) | 0.950                             | N/A        | N/A        |
| Matte diffuse (LD)  | 0.85                              | N/A        | N/A        |
| Painted             | N/A                               | 0.87       | 0.73       |

|       | LUMEN OUTPUT MULTIPLIERS - CCT |       |       |       |       |
|-------|--------------------------------|-------|-------|-------|-------|
|       | 2700K                          | 3000K | 3500K | 4000K | 5000K |
| 80CRI | 0.950                          | 0.966 | 1.000 | 1.025 | 1.101 |

### Notes

- Tested in accordance with IESNA LM-79-08.
- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- CRI: 80 typical.

## ADDITIONAL DATA

| COMPATIBLE 0-10V WALL-MOUNT DIMMERS |   |                         |
|-------------------------------------|---|-------------------------|
| MANUFACTURER                        | PART NO.  | POWER BOOSTER AVAILABLE |
| Lutron®                             | Diva® DDTV  |                         |
|                                     | Diva® DVSTCTV   |                         |
|                                     | Nova T® NTFTV   |                         |
|                                     | Nova® NFTV  |                         |
| Leviton®                            | AWSMT-7DW   | CN100                   |
|                                     | AWSMG-7DW   | PE300                   |
|                                     | AMRMG-7DW   |                         |
|                                     | Leviton Centura Fluorescent Control System                                    |                         |
|                                     | IllumaTech® IP7 Series  |                         |
| Synergy®                            | ISD BC  | RDMFC                   |
|                                     | SLD LPCS  |                         |
|                                     | Digital Equinox (DEQ BC)  |                         |
| Douglas Lighting Controls           | WPC-5721  |                         |
| Entertainment Technology            | Tap Glide TG600FAM120 (120V)  |                         |
|                                     | Tap Glide Heatsink TGH1500FAM120 (120V)                                       |                         |
|                                     | Oasis 0A2000FAMU  |                         |
| Honeywell                           | EL7315A1019   | EL7305A1010 (optional)  |
|                                     | EL7315A1009   |                         |
| HUNT Dimming                        | Preset slide: PS-010-IV and PS-010-WH   |                         |
|                                     | Preset slide: PS-010-3W-IV and PS-010-3W-WH                                   |                         |
|                                     | Preset slide, controls FD-010: PS-IFC-010-IV and PS-IFC-010-WH-120/277V       |                         |
|                                     | Preset slide, controls FD-010: PS-IFC-010-3W-IV and PS-IFC-010-3W-WH-120/277V |                         |
|                                     | Remote mounted unit: FD-010   |                         |
| Lehigh Electronic Products          | Solitaire   | PBX                     |
| PDM Electrical Products             | WPC-5721  |                         |
| Starfield Controls                  | TR61 with DALI interface port   | RT03 DALInet Router     |
| WattStopper®                        | LS-4 used with LCD-101 and LCD-103  |                         |

### A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a **shaded background**\*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a **shaded background**\*

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

\*See ordering tree for details

# LDN6


## EXAMPLE

Group Fixture Control\*

\*Application diagram applies for fixtures with eldoLED drivers only.

- nPS 80 EZ** Dimming/Control Pack (qty: 2 required)
- nPODM 2P DX** Dual On/Off/Dim Push-Button WallPod
- nCM ADCX** Daylight Sensor with Automatic Dimming Control
- nCM PDT 9** Dual Technology Occupancy Sensor

**Description:** This design provides a dual on/off/dim wall station that enables manual control of the fixtures in Row A and Row B separately. Additionally, a daylight harvesting sensor is provided so the lights in Row B can be configured to dim automatically when daylight is available. An occupancy sensor turns off all lights when the space is vacant.

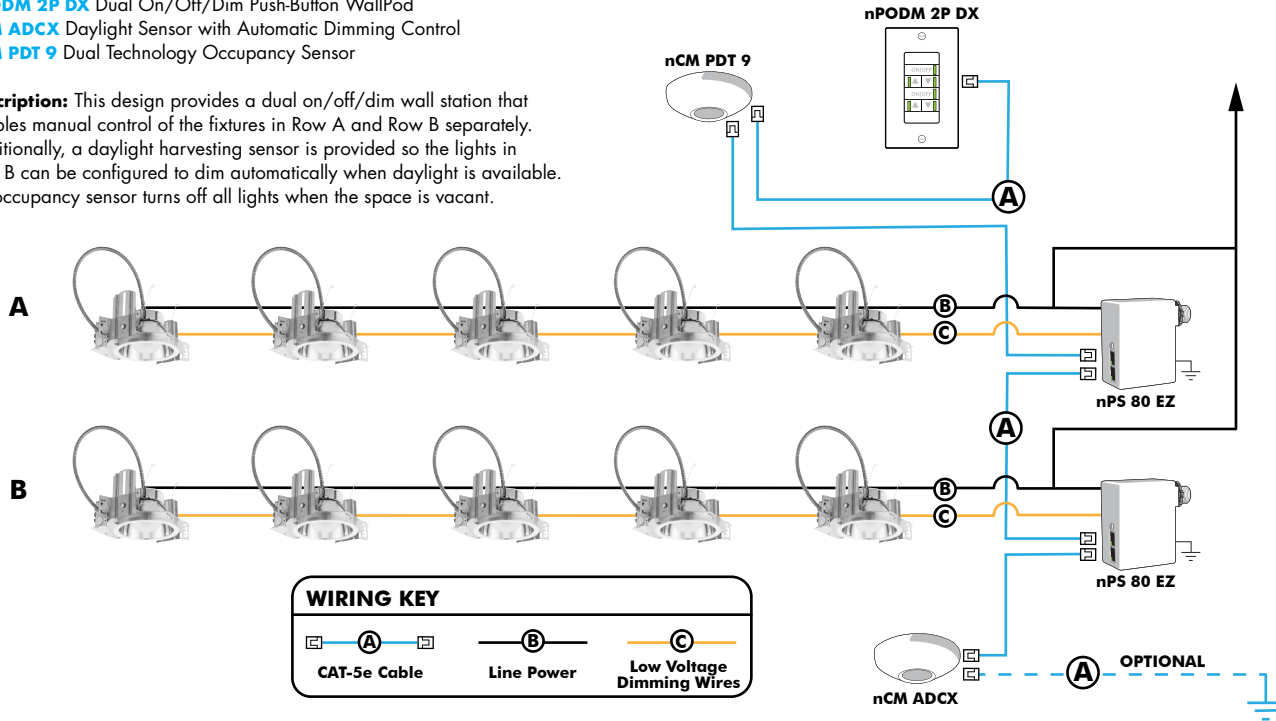

## Choose Wall Controls

nLight offers multiple styles of wall controls - each with varying features and user experience.



**Push-Button Wallpod**  
Traditional tactile buttons and LED user feedback



**Graphic Wallpod**  
Full color touch screen provides a sophisticated look and feel

## nLight® Wired Controls Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlight](http://www.acuitybrands.com/products/controls/nlight) for complete listing of nLight controls.

| WallPod Stations          | Model number        | Occupancy sensors                          | Model Number                |
|---------------------------|---------------------|--|-----------------------------|
| On/Off                    | nPODM (Color)       | Small motion 360°, ceiling (PIR/dual Tech) | nCM 9 / nCM PDT 9           |
| On/Off & Raise/Lower      | nPOD DX (Color)     | Large motion 360°, ceiling (PIR/dual tech) | nCM 10 / nCM PDT 10         |
| Graphic Touchscreen       | nPOD GFX (Color)    | Wide View (PIR/dual tech)                  | nWV 16 / nWV PDT 16         |
| <b>Photocell controls</b> | <b>Model Number</b> | Wall Switch w/ Raise/Lower (PIR/dual tech) | nWSX LV DX / nWSX PDT LV DX |
| Dimming                   | nCM ADCX            | <b>Cat-5 cables (plenum rated)</b>         | <b>Model Number</b>         |
|                           |                     | 10', CAT5 10FT                             | CATS 10FT J1                |
|                           |                     | 15, CAT5 15FT                              | CATS 15FT J1                |

## nLight® AIR Control Accessories:

Order as separate catalog number. Visit [www.acuitybrands.com/products/controls/nlightair](http://www.acuitybrands.com/products/controls/nlightair).

| Wall switches                    | Model number              |
|----------------------------------|---------------------------|
| On/Off single pole               | rPODB [color]             |
| On/Off two pole                  | rPODB 2P [color]          |
| On/Off & raise/lower single pole | rPODB DX [color]          |
| On/Off & raise/lower two pole    | rPODB 2P DX [color]       |
| On/Off & raise/lower single pole | rPODBZ DX WH <sup>1</sup> |

## Notes

- 1 Can only be ordered with the RES7Z zone control sensor version.

## nLight AIR

nLight AIR is the ideal solution for retrofit or new construction spaces where adding communication is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each Lithonia LDN Luminaire. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.



### Simple as 1,2,3

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome





## FEATURES & SPECIFICATIONS

**INTENDED USE** — These specifications are for USA standards only. Check with factory for Canadian specifications. Square Straight Steel is a general purpose light pole for up to 39-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

**CONSTRUCTION** — **Pole Shaft:** The pole shaft is of uniform dimension and wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 55 KSI (11-gauge, .1196"), or 50 KSI (7-gauge, .1793"). Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly square in cross-section with flat sides, small corner radii and excellent torsional qualities. Available shaft widths are 4", 5" and 6".

**Pole Top:** A flush non-metallic black top cap is provided for all poles that will receive drilling patterns for side-mount luminaire arm assemblies or when ordered with PT option.

**Handhole:** A reinforced handhole with grounding provision is provided at 18" from the base on side A. Positioning the handhole lower may not be possible and requires engineering review; consult Tech Support-Outdoor for further information. Every handhole includes a cover and cover attachment hardware. The handhole has a nominal dimension of 2.5" x 5".

**Base Cover:** A durable ABS plastic two-piece full base cover, finished to match the pole, is provided with each pole assembly. Additional base cover options are available upon request.

**Anchor Base/ Bolts:** Anchor base is fabricated from steel that meets ASTM A36 standards and can be altered to match existing foundations; consult factory for modifications. Anchor bolts are manufactured to ASTM F1554 Standards grade 55, (55 KSI minimum yield strength and tensile strength of 75-95 KSI). Top threaded portion (nominal 12") is hot-dipped galvanized per ASTM A-153.

**HARDWARE** — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

**FINISH** — Extra durable standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

**WARRANTY** — 1-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |



20' POLE  
5" SQUARE

36" HIGH CONCRETE BASE  
24" DIAMETER

Anchor Base Poles

SSS

SQUARE STRAIGHT STEEL

# SSS Square Straight Steel Poles

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** SSS 20 5C DM19 DDB

| SSS        | Nominal fixture mounting height  | Nominal shaft base size/wall thickness <sup>1</sup>   | Mounting <sup>2</sup>  | Options  | Finish <sup>10</sup>  |  |
|------------|--|---|--|--|---|--|
| <b>SSS</b> | 10'-39'<br>(for 1/2 ft increments, add -6 to the pole height.<br>Ex: 20-6 equals 20ft 6in.)<br><br>See technical information table for complete ordering information.) | 4C 4" 11g (.1196")<br>4G 4" 7g (.1793")<br><b>5C</b> 5" 11g (.1196")<br>5G 5" 7g (.1793")<br>6G 6" 7g (.1793")<br><br>See technical information table for complete ordering information.) | <b>Tenon mounting</b><br>PT Open top (includes top cap)<br>T20 2-3/8" O.D. (2" NPS)<br>T25 2-7/8" O.D. (2-1/2" NPS)<br>T30 3-1/2" O.D. (3" NPS)<br>T35 4" O.D. (3-1/2" NPS)<br><b>KAC/KAD/KSE/KSF/KVR/KVE Drill mounting<sup>3</sup></b><br>DM19 1 at 90°<br>DM28 2 at 180°<br>DM28 PL 2 at 180° with one side plugged<br>DM29 2 at 90°<br>DM39 3 at 90°<br>DM49 4 at 90°<br><b>CSX/DSX/RSX/AERIS™/OMERO™/HLA/KAX Drill mounting<sup>3</sup></b><br><b>DM19AS</b> 1 at 90°<br>DM28AS 2 at 180°<br>DM29AS 2 at 90°<br>DM39AS 3 at 90°<br>DM49AS 4 at 90°<br><b>RAD drill mounting<sup>3</sup></b><br>DM19RAD 1 at 90°<br>DM28RAD 2 at 180°<br>DM29RAD 2 at 90°<br>DM32RAD 3 at 120°<br>DM39RAD 3 at 90°<br>DM49RAD 4 at 90° | <b>AERIS™ Suspend drill mounting<sup>3,4</sup></b><br>DM19AST_ 1 at 90°<br>DM28AST_ 2 at 180°<br>DM29AST_ 2 at 90°<br>DM39AST_ 3 at 90°<br>DM49AST_ 4 at 90°<br><b>OMERO™ Suspend drill mounting<sup>3,4</sup></b><br>DM19MRT_ 1 at 90°<br>DM28MRT_ 2 at 180°<br>DM29MRT_ 2 at 90°<br>DM39MRT_ 3 at 90°<br>DM49MRT_ 4 at 90° | <b>Shipped installed</b><br>L/AB Less anchor bolts (Include when anchor bolts are not needed)<br>VD Vibration damper<br>TP Tamper resistant handhole cover fasteners<br>HAxy Horizontal arm bracket (1 fixture) <sup>5,6</sup><br>FDLxy Festoon outlet less electrical <sup>5</sup><br>CPL12/xy 1/2" coupling <sup>5</sup><br>CPL34/xy 3/4" coupling <sup>5</sup><br>CPL1/xy 1" coupling <sup>5</sup><br>NPL12/xy 1/2" threaded nipple <sup>5</sup><br>NPL34/xy 3/4" threaded nipple <sup>5</sup><br>NPL1/xy 1" threaded nipple <sup>5</sup><br>EHHxy Extra handhole <sup>5,7</sup><br>MAEX Match existing <sup>8</sup><br>USPOM United States point of manufacture <sup>9</sup><br><b>IC</b> Interior coating <sup>10</sup><br>UL UL listed with label (Includes NEC compliant cover)<br>NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled)<br><br><b>Shipped separately (replacement kit available)</b><br>(blank) FBC Full base cover (plastic)<br>(blank) TC Top cap<br>(blank) HHC Handhole cover | <b>Standard colors</b><br>DDBXD Dark bronze<br>DWHXD White<br>DBLXD Black<br>DMBXD Medium bronze<br>DNAXD Natural aluminum<br><br><b>Classic colors</b><br>DSS Sandstone<br>DGC Charcoal gray<br>DTG Tennis green<br>DBR Bright red<br>DSB Steel blue<br><br><b>Architectural Colors and Special Finishes<sup>11</sup></b><br>Galvanized, Paint over Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes available. |
|            | <b>20'</b>   | <b>5"</b>   |  |  |   |  |

### NOTES:

- Wall thickness will be signified with a "C" (11 Gauge) or a "G" (7-Gauge) in nomenclature. "C" - 0.1196" | "G" - 0.1793".
- PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, follow this example: DM28/T20. The combination includes a required extra handhole.
- Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.
- Insert "1" or "2" to designate fixture size; e.g. DM19AST2.

- Specify location and orientation when ordering option.  
For "x": Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".  
*Example: 5ft = 5 and 20ft 3in = 20-3*  
For "y": Specify orientation from handhole (A,B,C,D)  
*Refer to the Handhole Orientation diagram below.*  
*Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C*
- Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D. If ordering two horizontal arm at the same height, specify with HAxy. Example: HA20BD.


- Combination of tenon-top and drill mount includes extra handhole.
- Must add original order number of existing pole(s).
- Use when mill certifications are required.
- Provides enhanced corrosion resistance.
- Additional colors available; see [www.lithonia.com/archcolors](http://www.lithonia.com/archcolors) or Architectural Colors brochure (Form No. 794.3). Available by formal quote only, consult factory for details.

# SSS Square Straight Steel Poles



| TECHNICAL INFORMATION — EPA (ft <sup>2</sup> ) with 1.3 gust |                             |  |                 |       |                                      |             |        |             |         |             |                  |                             |                                |
|--|-----------------------------|--|-----------------|-------|--------------------------------------|-------------|--------|-------------|---------|-------------|------------------|-----------------------------|--------------------------------|
| Catalog Number   | Nominal Shaft Length (ft.)* | Pole Shaft Size (Base in. x Top in. x ft.) | Wall thick (in) | Gauge | EPA (ft <sup>2</sup> ) with 1.3 gust |             |        |             |         |             | Bolt circle (in) | Bolt size (in. x in. x in.) | Approximate ship weight (lbs.) |
|  |                             |  |                 |       | 80 MPH                               | Max. weight | 90 MPH | Max. weight | 100 MPH | Max. weight |                  |                             |                                |
| SSS 10 4C  | 10                          | 4.0 x 10.0                                 | 0.1196          | 11    | 30.6                                 | 765         | 23.8   | 595         | 18.9    | 473         | 8-9              | 3/4 x 18 x 3                | 75                             |
| SSS 12 4C  | 12                          | 4.0 x 12.0                                 | 0.1196          | 11    | 24.4                                 | 610         | 18.8   | 470         | 14.8    | 370         | 8-9              | 3/4 x 18 x 3                | 90                             |
| SSS 14 4C  | 14                          | 4.0 x 14.0                                 | 0.1196          | 11    | 19.9                                 | 498         | 15.1   | 378         | 11.7    | 293         | 8-9              | 3/4 x 18 x 3                | 100                            |
| SSS 16 4C  | 16                          | 4.0 x 16.0                                 | 0.1196          | 11    | 15.9                                 | 398         | 11.8   | 295         | 8.9     | 223         | 8-9              | 3/4 x 18 x 3                | 115                            |
| SSS 18 4C  | 18                          | 4.0 x 18.0                                 | 0.1196          | 11    | 12.6                                 | 315         | 9.2    | 230         | 6.7     | 168         | 8-9              | 3/4 x 18 x 3                | 125                            |
| SSS 20 4C  | 20                          | 4.0 x 20.0                                 | 0.1196          | 11    | 9.6                                  | 240         | 6.7    | 167         | 4.5     | 150         | 8-9              | 3/4 x 18 x 3                | 140                            |
| SSS 20 4G  | 20                          | 4.0 x 20.0                                 | 0.1793          | 7     | 14                                   | 350         | 11     | 275         | 8       | 200         | 8-9              | 3/4 x 30 x 3                | 198                            |
| SSS 20 5C  | 20                          | 5.0 x 20.0                                 | 0.1196          | 11    | 17.7                                 | 443         | 12.7   | 343         | 9.4     | 235         | 10-12            | 1 x 36 x 4                  | 185                            |
| SSS 20 5G  | 20                          | 5.0 x 20.0                                 | 0.1793          | 7     | 28.1                                 | 703         | 21.4   | 535         | 16.2    | 405         | 10-12            | 1 x 36 x 4                  | 265                            |
| SSS 25 4C  | 25                          | 4.0 x 25.0                                 | 0.1196          | 11    | 4.8                                  | 150         | 2.6    | 100         | 1       | 50          | 8-9              | 3/4 x 18 x 3                | 170                            |
| SSS 25 4G  | 25                          | 4.0 x 25.0                                 | 0.1793          | 7     | 10.8                                 | 270         | 7.7    | 188         | 5.4     | 135         | 8-9              | 3/4 x 30 x 3                | 245                            |
| SSS 25 5C  | 25                          | 5.0 x 25.0                                 | 0.1196          | 11    | 9.8                                  | 245         | 6.3    | 157         | 3.7     | 150         | 10-12            | 1 x 36 x 4                  | 225                            |
| SSS 25 5G  | 25                          | 5.0 x 25.0                                 | 0.1793          | 7     | 18.5                                 | 463         | 13.3   | 333         | 9.5     | 238         | 10-12            | 1 x 36 x 4                  | 360                            |
| SSS 30 4G  | 30                          | 4.0 x 30.0                                 | 0.1793          | 7     | 6.7                                  | 168         | 4.4    | 110         | 2.6     | 65          | 8-9              | 3/4 x 30 x 3                | 295                            |
| SSS 30 5C  | 30                          | 5.0 x 30.0                                 | 0.1196          | 11    | 4.7                                  | 150         | 2      | 50          | --      | --          | 10-12            | 1 x 36 x 4                  | 265                            |
| SSS 30 5G  | 30                          | 5.0 x 30.0                                 | 0.1793          | 7     | 10.7                                 | 267         | 6.7    | 167         | 3.9     | 100         | 10-12            | 1 x 36 x 4                  | 380                            |
| SSS 30 6G  | 30                          | 6.0 x 30.0                                 | 0.1793          | 7     | 19                                   | 475         | 13.2   | 330         | 9       | 225         | 11-13            | 1 x 36 x 4                  | 520                            |
| SSS 35 5G  | 35                          | 5.0 x 35.0                                 | 0.1793          | 7     | 5.9                                  | 150         | 2.5    | 100         | --      | --          | 10-12            | 1 x 36 x 4                  | 440                            |
| SSS 35 6G  | 35                          | 6.0 x 35.0                                 | 0.1793          | 7     | 12.4                                 | 310         | 7.6    | 190         | 4.2     | 105         | 11-13            | 1 x 36 x 4                  | 540                            |
| SSS 39 6G  | 39                          | 6.0 x 39.0                                 | 0.1793          | 7     | 7.2                                  | 180         | 3      | 75          | --      | --          | 11-13            | 1 x 36 x 4                  | 605                            |

\* EPA values are based ASCE 7-93 wind map. For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.


## BASE DETAIL



| POLE DATA       |               |                   |                 |                      |                      |                         |                                 |                         |
|-----------------|---------------|-------------------|-----------------|----------------------|----------------------|-------------------------|---------------------------------|-------------------------|
| Shaft base size | Bolt circle A | Bolt projection B | Base diameter C | Base plate thickness | Template description | Anchor bolt description | Anchor bolt and template number | Anchor bolt description |
| 4"C             | 8" - 9"       | 3.25" - 3.75"     | 8" - 8.25"      | 0.75"                | ABTEMPLATE PJ50004   | AB18-0                  | ABSSS-4C                        | 3/4"x18"x3"             |
| 4"G             | 8" - 9"       | 3.38" - 3.75"     | 8" - 8.25"      | 0.875"               | ABTEMPLATE PJ50004   | AB30-0                  | ABSSS-4G                        | 3/4"x30"x3"             |
| 5"              | 10" - 12"     | 3.5" - 4"         | 11"             | 1"                   | ABTEMPLATE PJ50010   | AB36-0                  | ABSSS-5                         | 1"x36"x4"               |
| 6"              | 11" - 13"     | 4" - 4.50"        | 12.5"           | 1"                   | ABTEMPLATE PJ50011   | AB36-0                  | N/A                             | 1"x36"x4"               |



## HANDHOLE ORIENTATION



Default DM19 is on side B.

## IMPORTANT INSTALLATION NOTES:

- Do not erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use Lithonia Lighting factory templates.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.



## FEATURES & SPECIFICATIONS

**INTENDED USE** — These specifications are for USA standards only. Check with factory for Canadian specifications. Square Straight Steel is a general purpose light pole for up to 39-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

**CONSTRUCTION** — **Pole Shaft:** The pole shaft is of uniform dimension and wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 55 KSI (11-gauge, .1196"), or 50 KSI (7-gauge, .1793"). Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly square in cross-section with flat sides, small corner radii and excellent torsional qualities. Available shaft widths are 4", 5" and 6".

**Pole Top:** A flush non-metallic black top cap is provided for all poles that will receive drilling patterns for side-mount luminaire arm assemblies or when ordered with PT option.

**Handhole:** A reinforced handhole with grounding provision is provided at 18" from the base on side A. Positioning the handhole lower may not be possible and requires engineering review; consult Tech Support-Outdoor for further information. Every handhole includes a cover and cover attachment hardware. The handhole has a nominal dimension of 2.5" x 5".

**Base Cover:** A durable ABS plastic two-piece full base cover, finished to match the pole, is provided with each pole assembly. Additional base cover options are available upon request.

**Anchor Base/ Bolts:** Anchor base is fabricated from steel that meets ASTM A36 standards and can be altered to match existing foundations; consult factory for modifications. Anchor bolts are manufactured to ASTM F1554 Standards grade 55, (55 KSI minimum yield strength and tensile strength of 75-95 KSI). Top threaded portion (nominal 12") is hot-dipped galvanized per ASTM A-153.

**HARDWARE** — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

**FINISH** — Extra durable standard powder-coat finishes include Dark Bronze, White, Black, Medium Bronze and Natural Aluminum colors. Classic finishes include Sandstone, Charcoal Gray, Tennis Green, Bright Red and Steel Blue colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Hot-dipped Galvanized, Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes. Factory-applied primer paint finish is available for customer field-paint applications.

**WARRANTY** — 1-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |



20' POLE  
5" SQUARE

Anchor Base Poles

SSS

SQUARE STRAIGHT STEEL

36" HIGH CONCRETE BASE  
24" DIAMETER



# SSS Square Straight Steel Poles

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** SSS 20 5C DM19 DDB

| SSS Series | Nominal fixture mounting height  | Nominal shaft base size/wall thickness <sup>1</sup>   | Mounting <sup>2</sup>  | Options  | Finish <sup>10</sup>  |  |
|------------|--|---|--|--|---|--|
| <b>SSS</b> | 10'-39' (for 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.)<br><br>See technical information table for complete ordering information.) | 4C 4" 11g (.1196")<br>4G 4" 7g (.1793")<br><b>5C</b> 5" 11g (.1196")<br>5G 5" 7g (.1793")<br>6G 6" 7g (.1793")<br><br>See technical information table for complete ordering information.) | <b>Tenon mounting</b><br>PT Open top (includes top cap)<br>T20 2-3/8" O.D. (2" NPS)<br>T25 2-7/8" O.D. (2-1/2" NPS)<br>T30 3-1/2" O.D. (3" NPS)<br>T35 4" O.D. (3-1/2" NPS)<br><b>KAC/KAD/KSE/KSF/KVR/KVE Drill mounting<sup>3</sup></b><br>DM19 1 at 90°<br>DM28 2 at 180°<br>DM28 PL 2 at 180° with one side plugged<br>DM29 2 at 90°<br>DM39 3 at 90°<br>DM49 4 at 90°<br><b>CSX/DSX/RSX/AERIS™/OMERO™/HLA/KAX Drill mounting<sup>3</sup></b><br>DM19AS 1 at 90°<br><b>DM28AS</b> 2 at 180°<br>DM29AS 2 at 90°<br>DM39AS 3 at 90°<br>DM49AS 4 at 90°<br><b>RAD drill mounting<sup>3</sup></b><br>DM19RAD 1 at 90°<br>DM28RAD 2 at 180°<br>DM29RAD 2 at 90°<br>DM32RAD 3 at 120°<br>DM39RAD 3 at 90°<br>DM49RAD 4 at 90° | <b>AERIS™ Suspend drill mounting<sup>3,4</sup></b><br>DM19AST_ 1 at 90°<br>DM28AST_ 2 at 180°<br>DM29AST_ 2 at 90°<br>DM39AST_ 3 at 90°<br>DM49AST_ 4 at 90°<br><b>OMERO™ Suspend drill mounting<sup>3,4</sup></b><br>DM19MRT_ 1 at 90°<br>DM28MRT_ 2 at 180°<br>DM29MRT_ 2 at 90°<br>DM39MRT_ 3 at 90°<br>DM49MRT_ 4 at 90° | <b>Shipped installed</b><br>L/AB Less anchor bolts (Include when anchor bolts are not needed)<br>VD Vibration damper<br>TP Tamper resistant handhole cover fasteners<br>HAxy Horizontal arm bracket (1 fixture) <sup>5,6</sup><br>FDLxy Festoon outlet less electrical <sup>5</sup><br>CPL12/xy 1/2" coupling <sup>5</sup><br>CPL34/xy 3/4" coupling <sup>5</sup><br>CPL1/xy 1" coupling <sup>5</sup><br>NPL12/xy 1/2" threaded nipple <sup>5</sup><br>NPL34/xy 3/4" threaded nipple <sup>5</sup><br>NPL1/xy 1" threaded nipple <sup>5</sup><br>EHHxy Extra handhole <sup>5,7</sup><br>MAEX Match existing <sup>8</sup><br>USPOM United States point of manufacture <sup>9</sup><br><b>IC</b> Interior coating <sup>10</sup><br>UL UL listed with label (Includes NEC compliant cover)<br>NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled)<br><br><b>Shipped separately (replacement kit available)</b><br>(blank) FBC Full base cover (plastic)<br>(blank) TC Top cap<br>(blank) HHC Handhole cover | <b>Standard colors</b><br>DDBXD Dark bronze<br>DWHXD White<br>DBLXD Black<br>DMBXD Medium bronze<br>DNAXD Natural aluminum<br><br><b>Classic colors</b><br>DSS Sandstone<br>DGC Charcoal gray<br>DTG Tennis green<br>DBR Bright red<br>DSB Steel blue<br><br><b>Architectural Colors and Special Finishes<sup>11</sup></b><br>Galvanized, Paint over Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes available. |
|            | <b>20'</b>   | <b>5"</b>   |  |  |   |  |

### NOTES:

- Wall thickness will be signified with a "C" (11 Gauge) or a "G" (7-Gauge) in nomenclature. "C" - 0.1196" | "G" - 0.1793".
- PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, follow this example: DM28/T20. The combination includes a required extra handhole.
- Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.
- Insert "1" or "2" to designate fixture size; e.g. DM19AST2.

- Specify location and orientation when ordering option.  
For "x": Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".  
*Example: 5ft = 5 and 20ft 3in = 20-3*  
For "y": Specify orientation from handhole (A,B,C,D)  
*Refer to the Handhole Orientation diagram below.*  
*Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C*
- Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D. If ordering two horizontal arm at the same height, specify with HAxy. Example: HA20BD.


- Combination of tenon-top and drill mount includes extra handhole.
- Must add original order number of existing pole(s).
- Use when mill certifications are required.
- Provides enhanced corrosion resistance.
- Additional colors available; see [www.lithonia.com/archcolors](http://www.lithonia.com/archcolors) or Architectural Colors brochure (Form No. 794.3). Available by formal quote only, consult factory for details.

# SSS Square Straight Steel Poles



| TECHNICAL INFORMATION — EPA (ft <sup>2</sup> ) with 1.3 gust |                             |  |                 |       |                                      |             |        |             |         |             |                  |                             |                                |
|--|-----------------------------|--|-----------------|-------|--------------------------------------|-------------|--------|-------------|---------|-------------|------------------|-----------------------------|--------------------------------|
| Catalog Number   | Nominal Shaft Length (ft.)* | Pole Shaft Size (Base in. x Top in. x ft.) | Wall thick (in) | Gauge | EPA (ft <sup>2</sup> ) with 1.3 gust |             |        |             |         |             | Bolt circle (in) | Bolt size (in. x in. x in.) | Approximate ship weight (lbs.) |
|  |                             |  |                 |       | 80 MPH                               | Max. weight | 90 MPH | Max. weight | 100 MPH | Max. weight |                  |                             |                                |
| SSS 10 4C  | 10                          | 4.0 x 10.0                                 | 0.1196          | 11    | 30.6                                 | 765         | 23.8   | 595         | 18.9    | 473         | 8-9              | 3/4 x 18 x 3                | 75                             |
| SSS 12 4C  | 12                          | 4.0 x 12.0                                 | 0.1196          | 11    | 24.4                                 | 610         | 18.8   | 470         | 14.8    | 370         | 8-9              | 3/4 x 18 x 3                | 90                             |
| SSS 14 4C  | 14                          | 4.0 x 14.0                                 | 0.1196          | 11    | 19.9                                 | 498         | 15.1   | 378         | 11.7    | 293         | 8-9              | 3/4 x 18 x 3                | 100                            |
| SSS 16 4C  | 16                          | 4.0 x 16.0                                 | 0.1196          | 11    | 15.9                                 | 398         | 11.8   | 295         | 8.9     | 223         | 8-9              | 3/4 x 18 x 3                | 115                            |
| SSS 18 4C  | 18                          | 4.0 x 18.0                                 | 0.1196          | 11    | 12.6                                 | 315         | 9.2    | 230         | 6.7     | 168         | 8-9              | 3/4 x 18 x 3                | 125                            |
| SSS 20 4C  | 20                          | 4.0 x 20.0                                 | 0.1196          | 11    | 9.6                                  | 240         | 6.7    | 167         | 4.5     | 150         | 8-9              | 3/4 x 18 x 3                | 140                            |
| SSS 20 4G  | 20                          | 4.0 x 20.0                                 | 0.1793          | 7     | 14                                   | 350         | 11     | 275         | 8       | 200         | 8-9              | 3/4 x 30 x 3                | 198                            |
| SSS 20 5C  | 20                          | 5.0 x 20.0                                 | 0.1196          | 11    | 17.7                                 | 443         | 12.7   | 343         | 9.4     | 235         | 10-12            | 1 x 36 x 4                  | 185                            |
| SSS 20 5G  | 20                          | 5.0 x 20.0                                 | 0.1793          | 7     | 28.1                                 | 703         | 21.4   | 535         | 16.2    | 405         | 10-12            | 1 x 36 x 4                  | 265                            |
| SSS 25 4C  | 25                          | 4.0 x 25.0                                 | 0.1196          | 11    | 4.8                                  | 150         | 2.6    | 100         | 1       | 50          | 8-9              | 3/4 x 18 x 3                | 170                            |
| SSS 25 4G  | 25                          | 4.0 x 25.0                                 | 0.1793          | 7     | 10.8                                 | 270         | 7.7    | 188         | 5.4     | 135         | 8-9              | 3/4 x 30 x 3                | 245                            |
| SSS 25 5C  | 25                          | 5.0 x 25.0                                 | 0.1196          | 11    | 9.8                                  | 245         | 6.3    | 157         | 3.7     | 150         | 10-12            | 1 x 36 x 4                  | 225                            |
| SSS 25 5G  | 25                          | 5.0 x 25.0                                 | 0.1793          | 7     | 18.5                                 | 463         | 13.3   | 333         | 9.5     | 238         | 10-12            | 1 x 36 x 4                  | 360                            |
| SSS 30 4G  | 30                          | 4.0 x 30.0                                 | 0.1793          | 7     | 6.7                                  | 168         | 4.4    | 110         | 2.6     | 65          | 8-9              | 3/4 x 30 x 3                | 295                            |
| SSS 30 5C  | 30                          | 5.0 x 30.0                                 | 0.1196          | 11    | 4.7                                  | 150         | 2      | 50          | --      | --          | 10-12            | 1 x 36 x 4                  | 265                            |
| SSS 30 5G  | 30                          | 5.0 x 30.0                                 | 0.1793          | 7     | 10.7                                 | 267         | 6.7    | 167         | 3.9     | 100         | 10-12            | 1 x 36 x 4                  | 380                            |
| SSS 30 6G  | 30                          | 6.0 x 30.0                                 | 0.1793          | 7     | 19                                   | 475         | 13.2   | 330         | 9       | 225         | 11-13            | 1 x 36 x 4                  | 520                            |
| SSS 35 5G  | 35                          | 5.0 x 35.0                                 | 0.1793          | 7     | 5.9                                  | 150         | 2.5    | 100         | --      | --          | 10-12            | 1 x 36 x 4                  | 440                            |
| SSS 35 6G  | 35                          | 6.0 x 35.0                                 | 0.1793          | 7     | 12.4                                 | 310         | 7.6    | 190         | 4.2     | 105         | 11-13            | 1 x 36 x 4                  | 540                            |
| SSS 39 6G  | 39                          | 6.0 x 39.0                                 | 0.1793          | 7     | 7.2                                  | 180         | 3      | 75          | --      | --          | 11-13            | 1 x 36 x 4                  | 605                            |

\* EPA values are based ASCE 7-93 wind map. For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.


## BASE DETAIL



| POLE DATA       |               |                   |                 |                      |                      |                         |                                 |                         |
|-----------------|---------------|-------------------|-----------------|----------------------|----------------------|-------------------------|---------------------------------|-------------------------|
| Shaft base size | Bolt circle A | Bolt projection B | Base diameter C | Base plate thickness | Template description | Anchor bolt description | Anchor bolt and template number | Anchor bolt description |
| 4"C             | 8" - 9"       | 3.25" - 3.75"     | 8" - 8.25"      | 0.75"                | ABTEMPLATE PJ50004   | AB18-0                  | ABSSS-4C                        | 3/4"x18"x3"             |
| 4"G             | 8" - 9"       | 3.38" - 3.75"     | 8" - 8.25"      | 0.875"               | ABTEMPLATE PJ50004   | AB30-0                  | ABSSS-4G                        | 3/4"x30"x3"             |
| 5"              | 10" - 12"     | 3.5" - 4"         | 11"             | 1"                   | ABTEMPLATE PJ50010   | AB36-0                  | ABSSS-5                         | 1"x36"x4"               |
| 6"              | 11" - 13"     | 4" - 4.50"        | 12.5"           | 1"                   | ABTEMPLATE PJ50011   | AB36-0                  | N/A                             | 1"x36"x4"               |



## HANDHOLE ORIENTATION

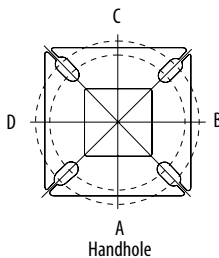

Default DM19 is on side B.

## IMPORTANT INSTALLATION NOTES:

- Do not erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use Lithonia Lighting factory templates.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.



# D-Series Size 1 LED Area Luminaire

d#series




|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

|                      |  |
|----------------------|--|
| <b>EPA:</b>          | 1.01 ft <sup>2</sup><br>(0.09 m <sup>2</sup> ) |
| <b>Length:</b>       | 33"<br>(83.8 cm)                               |
| <b>Width:</b>        | 13"<br>(33.0 cm)                               |
| <b>Height H1:</b>    | 7-1/2"<br>(19.0 cm)                            |
| <b>Height H2:</b>    | 3-1/2"   |
| <b>Weight (max):</b> | 27 lbs<br>(12.2 kg)                            |

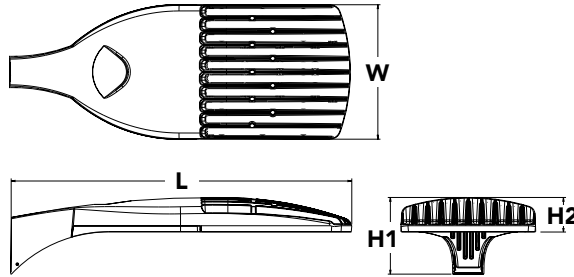

## Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

A+ Capable options indicated by this color background.

## Ordering Information

**EXAMPLE:** DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

| DSX1 LED        |   |                          |                                   |   |   |  |  |
|-----------------|---|--------------------------|-----------------------------------|---|---|--|--|
| Series          | LEDs  | Color temperature        |                                   | Distribution  |   | Voltage  | Mounting   |
| <b>DSX1 LED</b> | <b>Forward optics</b><br>P1 <b>P4</b> P7<br>P2 P5 P8<br>P3 P6 P9<br><b>Rotated optics</b><br>P10 <sup>1</sup> P12 <sup>1</sup><br>P11 <sup>1</sup> P13 <sup>1</sup> | 30K<br>40K<br><b>50K</b> | 3000 K<br>4000 K<br><b>5000 K</b> | T1S Type I short<br><b>T2M</b> Type II medium<br>T3S Type III short<br>T3M Type III medium<br>T4M Type IV medium<br>TFTM Forward throw medium | T5VS Type V very short<br>T5S Type V short<br>T5M Type V medium<br>TSW Type V wide<br>BLC Backlight control <sup>2</sup><br>LCCO Left corner cutoff <sup>2</sup><br>RCCO Right corner cutoff <sup>2</sup> | <b>MVOLT<sup>3</sup></b><br>120 <sup>4</sup><br>208 <sup>4</sup><br>240 <sup>4</sup><br>277 <sup>4</sup><br>347 <sup>4,5</sup><br>480 <sup>4,5</sup> | <b>Shipped included</b><br><b>SPA</b> <b>Square pole mounting</b><br>RPA Round pole mounting<br>WBA Wall bracket<br>SPUMBA Square pole universal mounting adaptor <sup>6</sup><br>RPUMBA Round pole universal mounting adaptor <sup>6</sup><br><b>Shipped separately</b><br>KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) <sup>7</sup> |

| Control options  | Other options   | Finish (required)   |
|--|---|---|
| <b>Shipped installed</b><br>NLTAIR2 nLight AIR generation 2 enabled <sup>8</sup><br>PIRHN Network, high/low motion/ambient sensor <sup>9</sup><br>PER NEMA twist-lock receptacle only (controls ordered separate) <sup>10</sup><br>PER5 Five-pin receptacle only (controls ordered separate) <sup>10,11</sup><br>PER7 Seven-pin receptacle only (controls ordered separate) <sup>10,11</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>12</sup><br>DS Dual switching <sup>12,13,14</sup> | PIR High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup><br>PIRH High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup><br>PIR1FC3V High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup><br>PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup><br>FAO Field adjustable output <sup>14</sup> | <b>Shipped installed</b><br>HS House-side shield <sup>17</sup><br>SF Single fuse (120, 277, 347V) <sup>4</sup><br>DF Double fuse (208, 240, 480V) <sup>4</sup><br>L90 Left rotated optics <sup>1</sup><br>R90 Right rotated optics <sup>1</sup><br><b>Shipped separately</b><br>BS Bird spikes <sup>18</sup><br>EGS External glare shield <sup>18</sup> |
|  |   | DDBXD Dark bronze<br>DBLXD Black<br>DNAXD Natural aluminum<br>DWHXD White<br>DDBTXD Textured dark bronze<br>DBLBXD Textured black<br>DNATXD Textured natural aluminum<br>DWHGXD Textured white  |



## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photocell - SSL twist-lock (120-277V) <sup>19</sup>                             |
| DLL347F 1.5 CUL JU | Photocell - SSL twist-lock (347V) <sup>19</sup>                                 |
| DLL480F 1.5 CUL JU | Photocell - SSL twist-lock (480V) <sup>19</sup>                                 |
| DSHORT SBK U       | Shorting cap <sup>19</sup>  |
| DSX1HS 30C U       | House-side shield for P1, P2, P3, P4 and P5 <sup>17</sup>                       |
| DSX1HS 40C U       | House-side shield for P6 and P7 <sup>17</sup>                                   |
| DSX1HS 60C U       | House-side shield for P8, P9, P10, P11 and P12 <sup>17</sup>                    |
| PUMBA DDBXD U*     | Square and round pole universal mounting bracket (specify finish) <sup>20</sup> |
| KMA8 DDBXD U       | Mast arm mounting bracket adaptor (specify finish) <sup>6</sup>                 |


For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAIR2. For more information on Light Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits with isolated neutral. See Outdoor Control Technical Guide for details.
- Reference Motion Sensor table on page 4.
- Reference controls options table on page 4 to see functionality.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.


## Options

### EGS - External Glare Shield

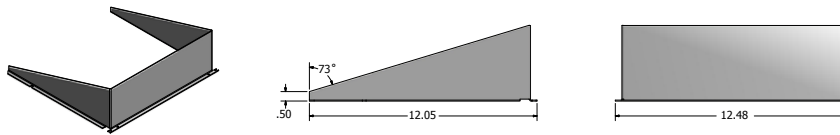

## Drilling

### HANDHOLE ORIENTATION

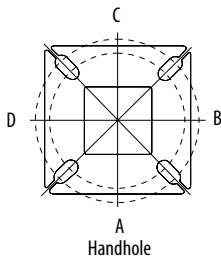


### Tenon Mounting Slipfitter\*\*

| Tenon O.D. | Mounting | Single Unit | 2 @ 180   | 2 @ 90    | 3 @ 120   | 3 @ 90    | 4 @ 90    |
|------------|----------|-------------|-----------|-----------|-----------|-----------|-----------|
| 2-3/8"     | SPA/RPA  | AS3-5 190   | AS3-5 280 | AS3-5 290 | AS3-5 320 | AS3-5 390 | AS3-5 490 |
|            | SPUMBA   | AS3-5 190   | AS3-5 280 | AS4-5 290 | AS3-5 320 | AS4-5 390 | AS4-5 490 |
|            | RUPUMBA  | AS3-5 190   | AS3-5 280 |           | AS3-5 320 |           |           |
| 2-7/8"     | SPA/RPA  | AST25-190   | AST25-280 | AST25-290 | AST25-320 | AST25-390 | AST25-490 |
|            | SPUMBA   | AST25-190   | AST25-280 |           | AST25-320 |           |           |
|            | RUPUMBA  | AST25-190   | AST25-280 |           | AST25-320 |           |           |
| 4"         | SPA/RPA  | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | SPUMBA   | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | RUPUMBA  | AST35-190   | AST35-280 |           | AST35-320 |           |           |

Template #8

Top of Pole

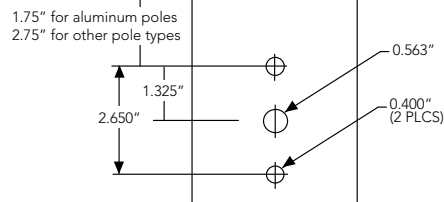

| Mounting Option    | Drilling Template | Single | 2 @ 180    | 2 @ 90     | 3 @ 90        | 3 @ 120         | 4 @ 90           |
|--------------------|-------------------|--------|------------|------------|---------------|-----------------|------------------|
| Head Location      |                   | Side B | Side B & D | Side B & C | Side B, C & D | Round Pole Only | Side A, B, C & D |
| Drill Nomenclature | #8                | DM19AS | DM28AS     | DM29AS     | DM39AS        | DM32AS          | DM49AS           |

|        | Drilling Template | Minimum Acceptable Outside Pole Dimension |        |      |      |      |      |
|--------|-------------------|---|--------|------|------|------|------|
| SPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| RPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| SPUMBA | #5                | 2-7/8"                                    | 3"     | 4"   | 4"   | 3.5" | 4"   |
| RPUMBA | #5                | 2-7/8"                                    | 3.5"   | 5"   | 5"   | 3.5" | 5"   |


# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).


Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

### LEGEND


- 0.1 fc
- 0.5 fc
- 1.0 fc




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.

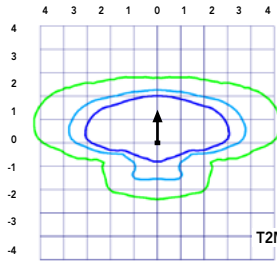


Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.




Test No. LT.L23271 tested in accordance with IESNA LM-79-08.




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.




Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.




Test No. LT.L23271 tested in accordance with IESNA LM-79-08.




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.

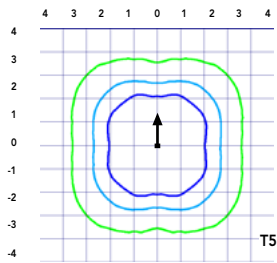


Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.



Test No. LT.L23271 tested in accordance with IESNA LM-79-08.



Test No. LT.L23211 tested in accordance with IESNA LM-79-08.



Test No. LT.L23164B tested in accordance with IESNA LM-79-08.

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.04             |
| 5°C         | 41°F        | 1.04             |
| 10°C        | 50°F        | 1.03             |
| 15°C        | 59°F        | 1.02             |
| 20°C        | 68°F        | 1.01             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 0.99             |
| 35°C        | 95°F        | 0.98             |
| 40°C        | 104°F       | 0.97             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | Lumen Maintenance Factor |
|-----------------|--------------------------|
| 0               | 1.00                     |
| 25,000          | 0.96                     |
| 50,000          | 0.92                     |
| 100,000         | 0.85                     |

#### Motion Sensor Default Settings

| Option                 | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|------------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| PIR or PIRH            | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| *PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use when motion sensor is used as dusk to dawn control.

### Electrical Load

|                                      | Performance Package | LED Count | Drive Current | Wattage | Current (A) |      |      |      |      |      |
|--------------------------------------|---------------------|-----------|---------------|---------|-------------|------|------|------|------|------|
|                                      |                     |           |               |         | 120         | 208  | 240  | 277  | 347  | 480  |
| Forward Optics (Non-Rotated)         | P1                  | 30        | 530           | 54      | 0.45        | 0.26 | 0.23 | 0.19 | 0.10 | 0.12 |
|                                      | P2                  | 30        | 700           | 70      | 0.59        | 0.34 | 0.30 | 0.25 | 0.20 | 0.16 |
|                                      | P3                  | 30        | 1050          | 102     | 0.86        | 0.50 | 0.44 | 0.38 | 0.30 | 0.22 |
|                                      | P4                  | 30        | 1250          | 125     | 1.06        | 0.60 | 0.52 | 0.46 | 0.37 | 0.27 |
|                                      | P5                  | 30        | 1400          | 138     | 1.16        | 0.67 | 0.58 | 0.51 | 0.40 | 0.29 |
|                                      | P6                  | 40        | 1250          | 163     | 1.36        | 0.78 | 0.68 | 0.59 | 0.47 | 0.34 |
|                                      | P7                  | 40        | 1400          | 183     | 1.53        | 0.88 | 0.76 | 0.66 | 0.53 | 0.38 |
|                                      | P8                  | 60        | 1050          | 207     | 1.74        | 0.98 | 0.87 | 0.76 | 0.64 | 0.49 |
|                                      | P9                  | 60        | 1250          | 241     | 2.01        | 1.16 | 1.01 | 0.89 | 0.70 | 0.51 |
| Rotated Optics (Requires L90 or R90) | P10                 | 60        | 530           | 106     | 0.90        | 0.52 | 0.47 | 0.43 | 0.33 | 0.27 |
|                                      | P11                 | 60        | 700           | 137     | 1.15        | 0.67 | 0.60 | 0.53 | 0.42 | 0.32 |
|                                      | P12                 | 60        | 1050          | 207     | 1.74        | 0.99 | 0.87 | 0.76 | 0.60 | 0.46 |
|                                      | P13                 | 60        | 1250          | 231     | 1.93        | 1.12 | 0.97 | 0.86 | 0.67 | 0.49 |

#### Controls Options

| Nomenclature  | Description   | Functionality   | Primary control device  | Notes  |
|---------------|---|---|---|--|
| FA0           | Field adjustable output device installed inside the luminaire; wired to the driver dimming leads. | Allows the luminaire to be manually dimmed, effectively trimming the light output.  | FA0 device  | Cannot be used with other controls options that need the 0-10V leads                                 |
| DS            | Drivers wired independently for 50/50 luminaire operation   | The luminaire is wired to two separate circuits, allowing for 50/50 operation.  | Independently wired drivers   | Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative. |
| PERS or PER7  | Twist-lock photocell receptacle   | Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.              | Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM. | Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire                        |
| PIR or PIRH   | Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting          | Luminaires dim when no occupancy is detected.   | Acuity Controls SBOR  | Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.          |
| NLTAIR2 PIRHN | nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.            | Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse. | nLight Air rSDGR  | nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.    |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |    |      |     |        |                      |   |   |     |        |                      |   |   |     |        |
|----------------|---------------|---------------|--------------|------------|----------------------|----|------|-----|--------|----------------------|---|---|-----|--------|----------------------|---|---|-----|--------|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |    |      |     |        | 40K (4000 K, 70 CRI) |   |   |     |        | 50K (5000 K, 70 CRI) |   |   |     |        |
|                |               |               |              |            | Lumens               | B  | U    | G   | LPW    | Lumens               | B | U | G   | LPW    | Lumens               | B | U | G   | LPW    |
| 30             | 530           | P1            | 54W          | T1S        | 6,457                | 2  | 0    | 2   | 120    | 6,956                | 2 | 0 | 2   | 129    | 7,044                | 2 | 0 | 2   | 130    |
|                |               |               |              | T2S        | 6,450                | 2  | 0    | 2   | 119    | 6,949                | 2 | 0 | 2   | 129    | 7,037                | 2 | 0 | 2   | 130    |
|                |               |               |              | T2M        | 6,483                | 1  | 0    | 1   | 120    | 6,984                | 2 | 0 | 2   | 129    | 7,073                | 2 | 0 | 2   | 131    |
|                |               |               |              | T3S        | 6,279                | 2  | 0    | 2   | 116    | 6,764                | 2 | 0 | 2   | 125    | 6,850                | 2 | 0 | 2   | 127    |
|                |               |               |              | T3M        | 6,468                | 1  | 0    | 2   | 120    | 6,967                | 1 | 0 | 2   | 129    | 7,056                | 1 | 0 | 2   | 131    |
|                |               |               |              | T4M        | 6,327                | 1  | 0    | 2   | 117    | 6,816                | 1 | 0 | 2   | 126    | 6,902                | 1 | 0 | 2   | 128    |
|                |               |               |              | TFTM       | 6,464                | 1  | 0    | 2   | 120    | 6,963                | 1 | 0 | 2   | 129    | 7,051                | 1 | 0 | 2   | 131    |
|                |               |               |              | TSVS       | 6,722                | 2  | 0    | 0   | 124    | 7,242                | 3 | 0 | 0   | 134    | 7,334                | 3 | 0 | 0   | 136    |
|                |               |               |              | T5S        | 6,728                | 2  | 0    | 1   | 125    | 7,248                | 2 | 0 | 1   | 134    | 7,340                | 2 | 0 | 1   | 136    |
|                |               |               |              | T5M        | 6,711                | 3  | 0    | 1   | 124    | 7,229                | 3 | 0 | 1   | 134    | 7,321                | 3 | 0 | 2   | 136    |
|                |               |               |              | TSW        | 6,667                | 3  | 0    | 2   | 123    | 7,182                | 3 | 0 | 2   | 133    | 7,273                | 3 | 0 | 2   | 135    |
|                |               |               |              | BLC        | 5,299                | 1  | 0    | 1   | 98     | 5,709                | 1 | 0 | 2   | 106    | 5,781                | 1 | 0 | 2   | 107    |
|                |               |               |              | LCCO       | 3,943                | 1  | 0    | 2   | 73     | 4,248                | 1 | 0 | 2   | 79     | 4,302                | 1 | 0 | 2   | 80     |
|                |               |               |              | RCCO       | 3,943                | 1  | 0    | 2   | 73     | 4,248                | 1 | 0 | 2   | 79     | 4,302                | 1 | 0 | 2   | 80     |
|                |               |               |              | 30         | 700                  | P2 | 70W  | T1S | 8,249  | 2                    | 0 | 2 | 118 | 8,886  | 2                    | 0 | 2 | 127 | 8,999  |
| T2S            | 8,240         | 2             | 0            |            |                      |    |      | 2   | 118    | 8,877                | 2 | 0 | 2   | 127    | 8,989                | 2 | 0 | 2   | 128    |
| T2M            | 8,283         | 2             | 0            |            |                      |    |      | 2   | 118    | 8,923                | 2 | 0 | 2   | 127    | 9,036                | 2 | 0 | 2   | 129    |
| T3S            | 8,021         | 2             | 0            |            |                      |    |      | 2   | 115    | 8,641                | 2 | 0 | 2   | 123    | 8,751                | 2 | 0 | 2   | 125    |
| T3M            | 8,263         | 2             | 0            |            |                      |    |      | 2   | 118    | 8,901                | 2 | 0 | 2   | 127    | 9,014                | 2 | 0 | 2   | 129    |
| T4M            | 8,083         | 2             | 0            |            |                      |    |      | 2   | 115    | 8,708                | 2 | 0 | 2   | 124    | 8,818                | 2 | 0 | 2   | 126    |
| TFTM           | 8,257         | 2             | 0            |            |                      |    |      | 2   | 118    | 8,896                | 2 | 0 | 2   | 127    | 9,008                | 2 | 0 | 2   | 129    |
| TSVS           | 8,588         | 3             | 0            |            |                      |    |      | 0   | 123    | 9,252                | 3 | 0 | 0   | 132    | 9,369                | 3 | 0 | 0   | 134    |
| T5S            | 8,595         | 3             | 0            |            |                      |    |      | 1   | 123    | 9,259                | 3 | 0 | 1   | 132    | 9,376                | 3 | 0 | 1   | 134    |
| T5M            | 8,573         | 3             | 0            |            |                      |    |      | 2   | 122    | 9,236                | 3 | 0 | 2   | 132    | 9,353                | 3 | 0 | 2   | 134    |
| TSW            | 8,517         | 3             | 0            |            |                      |    |      | 2   | 122    | 9,175                | 4 | 0 | 2   | 131    | 9,291                | 4 | 0 | 2   | 133    |
| BLC            | 6,770         | 1             | 0            |            |                      |    |      | 2   | 97     | 7,293                | 1 | 0 | 2   | 104    | 7,386                | 1 | 0 | 2   | 106    |
| LCCO           | 5,038         | 1             | 0            |            |                      |    |      | 2   | 72     | 5,427                | 1 | 0 | 2   | 78     | 5,496                | 1 | 0 | 2   | 79     |
| RCCO           | 5,038         | 1             | 0            |            |                      |    |      | 2   | 72     | 5,427                | 1 | 0 | 2   | 78     | 5,496                | 1 | 0 | 2   | 79     |
| 30             | 1050          | P3            | 102W         |            |                      |    |      | T1S | 11,661 | 2                    | 0 | 2 | 114 | 12,562 | 3                    | 0 | 3 | 123 | 12,721 |
|                |               |               |              | T2S        | 11,648               | 2  | 0    | 2   | 114    | 12,548               | 3 | 0 | 3   | 123    | 12,707               | 3 | 0 | 3   | 125    |
|                |               |               |              | T2M        | 11,708               | 2  | 0    | 2   | 115    | 12,613               | 2 | 0 | 2   | 124    | 12,773               | 2 | 0 | 2   | 125    |
|                |               |               |              | T3S        | 11,339               | 2  | 0    | 2   | 111    | 12,215               | 3 | 0 | 3   | 120    | 12,370               | 3 | 0 | 3   | 121    |
|                |               |               |              | T3M        | 11,680               | 2  | 0    | 2   | 115    | 12,582               | 2 | 0 | 2   | 123    | 12,742               | 2 | 0 | 2   | 125    |
|                |               |               |              | T4M        | 11,426               | 2  | 0    | 3   | 112    | 12,309               | 2 | 0 | 3   | 121    | 12,465               | 2 | 0 | 3   | 122    |
|                |               |               |              | TFTM       | 11,673               | 2  | 0    | 2   | 114    | 12,575               | 2 | 0 | 3   | 123    | 12,734               | 2 | 0 | 3   | 125    |
|                |               |               |              | TSVS       | 12,140               | 3  | 0    | 1   | 119    | 13,078               | 3 | 0 | 1   | 128    | 13,244               | 3 | 0 | 1   | 130    |
|                |               |               |              | T5S        | 12,150               | 3  | 0    | 1   | 119    | 13,089               | 3 | 0 | 1   | 128    | 13,254               | 3 | 0 | 1   | 130    |
|                |               |               |              | T5M        | 12,119               | 4  | 0    | 2   | 119    | 13,056               | 4 | 0 | 2   | 128    | 13,221               | 4 | 0 | 2   | 130    |
|                |               |               |              | TSW        | 12,040               | 4  | 0    | 3   | 118    | 12,970               | 4 | 0 | 3   | 127    | 13,134               | 4 | 0 | 3   | 129    |
|                |               |               |              | BLC        | 9,570                | 1  | 0    | 2   | 94     | 10,310               | 1 | 0 | 2   | 101    | 10,440               | 1 | 0 | 2   | 102    |
|                |               |               |              | LCCO       | 7,121                | 1  | 0    | 3   | 70     | 7,671                | 1 | 0 | 3   | 75     | 7,768                | 1 | 0 | 3   | 76     |
|                |               |               |              | RCCO       | 7,121                | 1  | 0    | 3   | 70     | 7,671                | 1 | 0 | 3   | 75     | 7,768                | 1 | 0 | 3   | 76     |
|                |               |               |              | 30         | 1250                 | P4 | 125W | T1S | 13,435 | 3                    | 0 | 3 | 107 | 14,473 | 3                    | 0 | 3 | 116 | 14,657 |
| T2S            | 13,421        | 3             | 0            |            |                      |    |      | 3   | 107    | 14,458               | 3 | 0 | 3   | 116    | 14,641               | 3 | 0 | 3   | 117    |
| T2M            | 13,490        | 2             | 0            |            |                      |    |      | 2   | 108    | 14,532               | 3 | 0 | 3   | 116    | 14,716               | 3 | 0 | 3   | 118    |
| T3S            | 13,064        | 3             | 0            |            |                      |    |      | 3   | 105    | 14,074               | 3 | 0 | 3   | 113    | 14,252               | 3 | 0 | 3   | 114    |
| T3M            | 13,457        | 2             | 0            |            |                      |    |      | 2   | 108    | 14,497               | 2 | 0 | 2   | 116    | 14,681               | 2 | 0 | 2   | 117    |
| T4M            | 13,165        | 2             | 0            |            |                      |    |      | 3   | 105    | 14,182               | 2 | 0 | 3   | 113    | 14,362               | 2 | 0 | 3   | 115    |
| TFTM           | 13,449        | 2             | 0            |            |                      |    |      | 3   | 108    | 14,488               | 2 | 0 | 3   | 116    | 14,672               | 2 | 0 | 3   | 117    |
| TSVS           | 13,987        | 4             | 0            |            |                      |    |      | 1   | 112    | 15,068               | 4 | 0 | 1   | 121    | 15,259               | 4 | 0 | 1   | 122    |
| T5S            | 13,999        | 3             | 0            |            |                      |    |      | 1   | 112    | 15,080               | 3 | 0 | 1   | 121    | 15,271               | 3 | 0 | 1   | 122    |
| T5M            | 13,963        | 4             | 0            |            |                      |    |      | 2   | 112    | 15,042               | 4 | 0 | 2   | 120    | 15,233               | 4 | 0 | 2   | 122    |
| TSW            | 13,872        | 4             | 0            |            |                      |    |      | 3   | 111    | 14,944               | 4 | 0 | 3   | 120    | 15,133               | 4 | 0 | 3   | 121    |
| BLC            | 11,027        | 1             | 0            |            |                      |    |      | 2   | 88     | 11,879               | 1 | 0 | 2   | 95     | 12,029               | 1 | 0 | 2   | 96     |
| LCCO           | 8,205         | 1             | 0            |            |                      |    |      | 3   | 66     | 8,839                | 1 | 0 | 3   | 71     | 8,951                | 1 | 0 | 3   | 72     |
| RCCO           | 8,205         | 1             | 0            |            |                      |    |      | 3   | 66     | 8,839                | 1 | 0 | 3   | 71     | 8,951                | 1 | 0 | 3   | 72     |
| 30             | 1400          | P5            | 138W         |            |                      |    |      | T1S | 14,679 | 3                    | 0 | 3 | 106 | 15,814 | 3                    | 0 | 3 | 115 | 16,014 |
|                |               |               |              | T2S        | 14,664               | 3  | 0    | 3   | 106    | 15,797               | 3 | 0 | 3   | 114    | 15,997               | 3 | 0 | 3   | 116    |
|                |               |               |              | T2M        | 14,739               | 3  | 0    | 3   | 107    | 15,878               | 3 | 0 | 3   | 115    | 16,079               | 3 | 0 | 3   | 117    |
|                |               |               |              | T3S        | 14,274               | 3  | 0    | 3   | 103    | 15,377               | 3 | 0 | 3   | 111    | 15,572               | 3 | 0 | 3   | 113    |
|                |               |               |              | T3M        | 14,704               | 2  | 0    | 3   | 107    | 15,840               | 3 | 0 | 3   | 115    | 16,040               | 3 | 0 | 3   | 116    |
|                |               |               |              | T4M        | 14,384               | 2  | 0    | 3   | 104    | 15,496               | 3 | 0 | 3   | 112    | 15,692               | 3 | 0 | 3   | 114    |
|                |               |               |              | TFTM       | 14,695               | 2  | 0    | 3   | 106    | 15,830               | 3 | 0 | 3   | 115    | 16,030               | 3 | 0 | 3   | 116    |
|                |               |               |              | TSVS       | 15,283               | 4  | 0    | 1   | 111    | 16,464               | 4 | 0 | 1   | 119    | 16,672               | 4 | 0 | 1   | 121    |
|                |               |               |              | T5S        | 15,295               | 3  | 0    | 1   | 111    | 16,477               | 4 | 0 | 1   | 119    | 16,686               | 4 | 0 | 1   | 121    |
|                |               |               |              | T5M        | 15,257               | 4  | 0    | 2   | 111    | 16,435               | 4 | 0 | 2   | 119    | 16,644               | 4 | 0 | 2   | 121    |
|                |               |               |              | TSW        | 15,157               | 4  | 0    | 3   | 110    | 16,328               | 4 | 0 | 3   | 118    | 16,534               | 4 | 0 | 3   | 120    |
|                |               |               |              | BLC        | 12,048               | 1  | 0    | 2   | 87     | 12,979               | 1 | 0 | 2   | 94     | 13,143               | 1 | 0 | 2   | 95     |
|                |               |               |              | LCCO       | 8,965                | 1  | 0    | 3   | 65     | 9,657                | 1 | 0 | 3   | 70     | 9,780                | 1 | 0 | 3   | 71     |
|                |               |               |              | RCCO       | 8,965                | 1  | 0    | 3   | 65     | 9,657                | 1 | 0 | 3   | 70     | 9,780                | 1 | 0 | 3   | 71     |





# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 40             | 1250          | P6            | 163W         | T1S        | 17,654               | 3 | 0 | 3 | 108 | 19,018               | 3 | 0 | 3 | 117 | 19,259               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2S        | 17,635               | 3 | 0 | 3 | 108 | 18,998               | 3 | 0 | 3 | 117 | 19,238               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2M        | 17,726               | 3 | 0 | 3 | 109 | 19,096               | 3 | 0 | 3 | 117 | 19,337               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 17,167               | 3 | 0 | 3 | 105 | 18,493               | 3 | 0 | 3 | 113 | 18,727               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3M        | 17,683               | 3 | 0 | 3 | 108 | 19,049               | 3 | 0 | 3 | 117 | 19,290               | 3 | 0 | 3 | 118 |
|                |               |               |              | T4M        | 17,299               | 3 | 0 | 3 | 106 | 18,635               | 3 | 0 | 4 | 114 | 18,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 17,672               | 3 | 0 | 3 | 108 | 19,038               | 3 | 0 | 4 | 117 | 19,279               | 3 | 0 | 4 | 118 |
|                |               |               |              | TSVS       | 18,379               | 4 | 0 | 1 | 113 | 19,800               | 4 | 0 | 1 | 121 | 20,050               | 4 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 18,394               | 4 | 0 | 2 | 113 | 19,816               | 4 | 0 | 2 | 122 | 20,066               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 18,348               | 4 | 0 | 2 | 113 | 19,766               | 4 | 0 | 2 | 121 | 20,016               | 4 | 0 | 2 | 123 |
|                |               |               |              | TSW        | 18,228               | 5 | 0 | 3 | 112 | 19,636               | 5 | 0 | 3 | 120 | 19,885               | 5 | 0 | 3 | 122 |
|                |               |               |              | BLC        | 14,489               | 2 | 0 | 2 | 89  | 15,609               | 2 | 0 | 3 | 96  | 15,806               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
| 40             | 1400          | P7            | 183W         | T1S        | 19,227               | 3 | 0 | 3 | 105 | 20,712               | 3 | 0 | 3 | 113 | 20,975               | 3 | 0 | 3 | 115 |
|                |               |               |              | T2S        | 19,206               | 3 | 0 | 3 | 105 | 20,690               | 3 | 0 | 3 | 113 | 20,952               | 3 | 0 | 3 | 114 |
|                |               |               |              | T2M        | 19,305               | 3 | 0 | 3 | 105 | 20,797               | 3 | 0 | 3 | 114 | 21,060               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3S        | 18,696               | 3 | 0 | 3 | 102 | 20,141               | 3 | 0 | 3 | 110 | 20,396               | 3 | 0 | 4 | 111 |
|                |               |               |              | T3M        | 19,258               | 3 | 0 | 3 | 105 | 20,746               | 3 | 0 | 3 | 113 | 21,009               | 3 | 0 | 3 | 115 |
|                |               |               |              | T4M        | 18,840               | 3 | 0 | 4 | 103 | 20,296               | 3 | 0 | 4 | 111 | 20,553               | 3 | 0 | 4 | 112 |
|                |               |               |              | TFTM       | 19,246               | 3 | 0 | 4 | 105 | 20,734               | 3 | 0 | 4 | 113 | 20,996               | 3 | 0 | 4 | 115 |
|                |               |               |              | TSVS       | 20,017               | 4 | 0 | 1 | 109 | 21,564               | 4 | 0 | 1 | 118 | 21,837               | 4 | 0 | 1 | 119 |
|                |               |               |              | T5S        | 20,033               | 4 | 0 | 2 | 109 | 21,581               | 4 | 0 | 2 | 118 | 21,854               | 4 | 0 | 2 | 119 |
|                |               |               |              | T5M        | 19,983               | 4 | 0 | 2 | 109 | 21,527               | 5 | 0 | 3 | 118 | 21,799               | 5 | 0 | 3 | 119 |
|                |               |               |              | TSW        | 19,852               | 5 | 0 | 3 | 108 | 21,386               | 5 | 0 | 3 | 117 | 21,656               | 5 | 0 | 3 | 118 |
|                |               |               |              | BLC        | 15,780               | 2 | 0 | 3 | 86  | 16,999               | 2 | 0 | 3 | 93  | 17,214               | 2 | 0 | 3 | 94  |
|                |               |               |              | LCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
|                |               |               |              | RCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
| 60             | 1050          | P8            | 207W         | T1S        | 22,490               | 3 | 0 | 3 | 109 | 24,228               | 3 | 0 | 3 | 117 | 24,535               | 3 | 0 | 3 | 119 |
|                |               |               |              | T2S        | 22,466               | 3 | 0 | 4 | 109 | 24,202               | 3 | 0 | 4 | 117 | 24,509               | 3 | 0 | 4 | 118 |
|                |               |               |              | T2M        | 22,582               | 3 | 0 | 3 | 109 | 24,327               | 3 | 0 | 3 | 118 | 24,635               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 21,870               | 3 | 0 | 4 | 106 | 23,560               | 3 | 0 | 4 | 114 | 23,858               | 3 | 0 | 4 | 115 |
|                |               |               |              | T3M        | 22,527               | 3 | 0 | 4 | 109 | 24,268               | 3 | 0 | 4 | 117 | 24,575               | 3 | 0 | 4 | 119 |
|                |               |               |              | T4M        | 22,038               | 3 | 0 | 4 | 106 | 23,741               | 3 | 0 | 4 | 115 | 24,041               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 22,513               | 3 | 0 | 4 | 109 | 24,253               | 3 | 0 | 4 | 117 | 24,560               | 3 | 0 | 4 | 119 |
|                |               |               |              | TSVS       | 23,415               | 5 | 0 | 1 | 113 | 25,224               | 5 | 0 | 1 | 122 | 25,543               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 23,434               | 4 | 0 | 2 | 113 | 25,244               | 4 | 0 | 2 | 122 | 25,564               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,221               | 5 | 0 | 4 | 112 | 25,016               | 5 | 0 | 4 | 121 | 25,332               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 18,458               | 2 | 0 | 3 | 89  | 19,885               | 2 | 0 | 3 | 96  | 20,136               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
| 60             | 1250          | P9            | 241W         | T1S        | 25,575               | 3 | 0 | 3 | 106 | 27,551               | 3 | 0 | 3 | 114 | 27,900               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 25,548               | 3 | 0 | 4 | 106 | 27,522               | 3 | 0 | 4 | 114 | 27,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | T2M        | 25,680               | 3 | 0 | 3 | 107 | 27,664               | 3 | 0 | 3 | 115 | 28,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T3S        | 24,870               | 3 | 0 | 4 | 103 | 26,791               | 3 | 0 | 4 | 111 | 27,130               | 3 | 0 | 4 | 113 |
|                |               |               |              | T3M        | 25,617               | 3 | 0 | 4 | 106 | 27,597               | 3 | 0 | 4 | 115 | 27,946               | 3 | 0 | 4 | 116 |
|                |               |               |              | T4M        | 25,061               | 3 | 0 | 4 | 104 | 26,997               | 3 | 0 | 4 | 112 | 27,339               | 3 | 0 | 4 | 113 |
|                |               |               |              | TFTM       | 25,602               | 3 | 0 | 4 | 106 | 27,580               | 3 | 0 | 4 | 114 | 27,929               | 3 | 0 | 4 | 116 |
|                |               |               |              | TSVS       | 26,626               | 5 | 0 | 1 | 110 | 28,684               | 5 | 0 | 1 | 119 | 29,047               | 5 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 26,648               | 4 | 0 | 2 | 111 | 28,707               | 5 | 0 | 2 | 119 | 29,070               | 5 | 0 | 2 | 121 |
|                |               |               |              | T5M        | 26,581               | 5 | 0 | 3 | 110 | 28,635               | 5 | 0 | 3 | 119 | 28,997               | 5 | 0 | 3 | 120 |
|                |               |               |              | TSW        | 26,406               | 5 | 0 | 4 | 110 | 28,447               | 5 | 0 | 4 | 118 | 28,807               | 5 | 0 | 4 | 120 |
|                |               |               |              | BLC        | 20,990               | 2 | 0 | 3 | 87  | 22,612               | 2 | 0 | 3 | 94  | 22,898               | 2 | 0 | 3 | 95  |
|                |               |               |              | LCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |
|                |               |               |              | RCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Rotated Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 60             | 530           | P10           | 106W         | T1S        | 13,042               | 3 | 0 | 3 | 123 | 14,050               | 3 | 0 | 3 | 133 | 14,228               | 3 | 0 | 3 | 134 |
|                |               |               |              | T2S        | 12,967               | 4 | 0 | 4 | 122 | 13,969               | 4 | 0 | 4 | 132 | 14,146               | 4 | 0 | 4 | 133 |
|                |               |               |              | T2M        | 13,201               | 3 | 0 | 3 | 125 | 14,221               | 3 | 0 | 3 | 134 | 14,401               | 3 | 0 | 3 | 136 |
|                |               |               |              | T3S        | 12,766               | 4 | 0 | 4 | 120 | 13,752               | 4 | 0 | 4 | 130 | 13,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | T3M        | 13,193               | 4 | 0 | 4 | 124 | 14,213               | 4 | 0 | 4 | 134 | 14,393               | 4 | 0 | 4 | 136 |
|                |               |               |              | T4M        | 12,944               | 4 | 0 | 4 | 122 | 13,945               | 4 | 0 | 4 | 132 | 14,121               | 4 | 0 | 4 | 133 |
|                |               |               |              | TFTM       | 13,279               | 4 | 0 | 4 | 125 | 14,305               | 4 | 0 | 4 | 135 | 14,486               | 4 | 0 | 4 | 137 |
|                |               |               |              | TSVS       | 13,372               | 3 | 0 | 1 | 126 | 14,405               | 4 | 0 | 1 | 136 | 14,588               | 4 | 0 | 1 | 138 |
|                |               |               |              | T5S        | 13,260               | 3 | 0 | 1 | 125 | 14,284               | 3 | 0 | 1 | 135 | 14,465               | 3 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 13,256               | 4 | 0 | 2 | 125 | 14,281               | 4 | 0 | 2 | 135 | 14,462               | 4 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 13,137               | 4 | 0 | 3 | 124 | 14,153               | 4 | 0 | 3 | 134 | 14,332               | 4 | 0 | 3 | 135 |
|                |               |               |              | BLC        | 10,906               | 3 | 0 | 3 | 103 | 11,749               | 3 | 0 | 3 | 111 | 11,898               | 3 | 0 | 3 | 112 |
|                |               |               |              | LCCO       | 7,789                | 1 | 0 | 3 | 73  | 8,391                | 1 | 0 | 3 | 79  | 8,497                | 1 | 0 | 3 | 80  |
|                |               |               |              | RCCO       | 7,779                | 4 | 0 | 4 | 73  | 8,380                | 4 | 0 | 4 | 79  | 8,486                | 4 | 0 | 4 | 80  |
| 60             | 700           | P11           | 137W         | T1S        | 16,556               | 3 | 0 | 3 | 121 | 17,835               | 3 | 0 | 3 | 130 | 18,061               | 4 | 0 | 4 | 132 |
|                |               |               |              | T2S        | 16,461               | 4 | 0 | 4 | 120 | 17,733               | 4 | 0 | 4 | 129 | 17,957               | 4 | 0 | 4 | 131 |
|                |               |               |              | T2M        | 16,758               | 4 | 0 | 4 | 122 | 18,053               | 4 | 0 | 4 | 132 | 18,281               | 4 | 0 | 4 | 133 |
|                |               |               |              | T3S        | 16,205               | 4 | 0 | 4 | 118 | 17,457               | 4 | 0 | 4 | 127 | 17,678               | 4 | 0 | 4 | 129 |
|                |               |               |              | T3M        | 16,748               | 4 | 0 | 4 | 122 | 18,042               | 4 | 0 | 4 | 132 | 18,271               | 4 | 0 | 4 | 133 |
|                |               |               |              | T4M        | 16,432               | 4 | 0 | 4 | 120 | 17,702               | 4 | 0 | 4 | 129 | 17,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | TFTM       | 16,857               | 4 | 0 | 4 | 123 | 18,159               | 4 | 0 | 4 | 133 | 18,389               | 4 | 0 | 4 | 134 |
|                |               |               |              | TSVS       | 16,975               | 4 | 0 | 1 | 124 | 18,287               | 4 | 0 | 1 | 133 | 18,518               | 4 | 0 | 1 | 135 |
|                |               |               |              | T5S        | 16,832               | 4 | 0 | 1 | 123 | 18,133               | 4 | 0 | 2 | 132 | 18,362               | 4 | 0 | 2 | 134 |
|                |               |               |              | T5M        | 16,828               | 4 | 0 | 2 | 123 | 18,128               | 4 | 0 | 2 | 132 | 18,358               | 4 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 16,677               | 4 | 0 | 3 | 122 | 17,966               | 5 | 0 | 3 | 131 | 18,193               | 5 | 0 | 3 | 133 |
|                |               |               |              | BLC        | 13,845               | 3 | 0 | 3 | 101 | 14,915               | 3 | 0 | 3 | 109 | 15,103               | 3 | 0 | 3 | 110 |
|                |               |               |              | LCCO       | 9,888                | 1 | 0 | 3 | 72  | 10,652               | 2 | 0 | 3 | 78  | 10,787               | 2 | 0 | 3 | 79  |
|                |               |               |              | RCCO       | 9,875                | 4 | 0 | 4 | 72  | 10,638               | 4 | 0 | 4 | 78  | 10,773               | 4 | 0 | 4 | 79  |
| 60             | 1050          | P12           | 207W         | T1S        | 22,996               | 4 | 0 | 4 | 111 | 24,773               | 4 | 0 | 4 | 120 | 25,087               | 4 | 0 | 4 | 121 |
|                |               |               |              | T2S        | 22,864               | 4 | 0 | 4 | 110 | 24,631               | 5 | 0 | 5 | 119 | 24,943               | 5 | 0 | 5 | 120 |
|                |               |               |              | T2M        | 23,277               | 4 | 0 | 4 | 112 | 25,075               | 4 | 0 | 4 | 121 | 25,393               | 4 | 0 | 4 | 123 |
|                |               |               |              | T3S        | 22,509               | 4 | 0 | 4 | 109 | 24,248               | 5 | 0 | 5 | 117 | 24,555               | 5 | 0 | 5 | 119 |
|                |               |               |              | T3M        | 23,263               | 4 | 0 | 4 | 112 | 25,061               | 4 | 0 | 4 | 121 | 25,378               | 4 | 0 | 4 | 123 |
|                |               |               |              | T4M        | 22,824               | 5 | 0 | 5 | 110 | 24,588               | 5 | 0 | 5 | 119 | 24,899               | 5 | 0 | 5 | 120 |
|                |               |               |              | TFTM       | 23,414               | 5 | 0 | 5 | 113 | 25,223               | 5 | 0 | 5 | 122 | 25,543               | 5 | 0 | 5 | 123 |
|                |               |               |              | TSVS       | 23,579               | 5 | 0 | 1 | 114 | 25,401               | 5 | 0 | 1 | 123 | 25,722               | 5 | 0 | 1 | 124 |
|                |               |               |              | T5S        | 23,380               | 4 | 0 | 2 | 113 | 25,187               | 4 | 0 | 2 | 122 | 25,506               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,165               | 5 | 0 | 4 | 112 | 24,955               | 5 | 0 | 4 | 121 | 25,271               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 19,231               | 4 | 0 | 4 | 93  | 20,717               | 4 | 0 | 4 | 100 | 20,979               | 4 | 0 | 4 | 101 |
|                |               |               |              | LCCO       | 13,734               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,716               | 4 | 0 | 4 | 66  | 14,776               | 4 | 0 | 4 | 71  | 14,963               | 4 | 0 | 4 | 72  |
| 60             | 1250          | P13           | 231W         | T1S        | 25,400               | 4 | 0 | 4 | 110 | 27,363               | 4 | 0 | 4 | 118 | 27,709               | 4 | 0 | 4 | 120 |
|                |               |               |              | T2S        | 25,254               | 5 | 0 | 5 | 109 | 27,205               | 5 | 0 | 5 | 118 | 27,550               | 5 | 0 | 5 | 119 |
|                |               |               |              | T2M        | 25,710               | 4 | 0 | 4 | 111 | 27,696               | 4 | 0 | 4 | 120 | 28,047               | 4 | 0 | 4 | 121 |
|                |               |               |              | T3S        | 24,862               | 5 | 0 | 5 | 108 | 26,783               | 5 | 0 | 5 | 116 | 27,122               | 5 | 0 | 5 | 117 |
|                |               |               |              | T3M        | 25,695               | 5 | 0 | 5 | 111 | 27,680               | 5 | 0 | 5 | 120 | 28,031               | 5 | 0 | 5 | 121 |
|                |               |               |              | T4M        | 25,210               | 5 | 0 | 5 | 109 | 27,158               | 5 | 0 | 5 | 118 | 27,502               | 5 | 0 | 5 | 119 |
|                |               |               |              | TFTM       | 25,861               | 5 | 0 | 5 | 112 | 27,860               | 5 | 0 | 5 | 121 | 28,212               | 5 | 0 | 5 | 122 |
|                |               |               |              | TSVS       | 26,043               | 5 | 0 | 1 | 113 | 28,056               | 5 | 0 | 1 | 121 | 28,411               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 25,824               | 4 | 0 | 2 | 112 | 27,819               | 5 | 0 | 2 | 120 | 28,172               | 5 | 0 | 2 | 122 |
|                |               |               |              | T5M        | 25,818               | 5 | 0 | 3 | 112 | 27,813               | 5 | 0 | 3 | 120 | 28,165               | 5 | 0 | 3 | 122 |
|                |               |               |              | TSW        | 25,586               | 5 | 0 | 4 | 111 | 27,563               | 5 | 0 | 4 | 119 | 27,912               | 5 | 0 | 4 | 121 |
|                |               |               |              | BLC        | 21,241               | 4 | 0 | 4 | 92  | 22,882               | 4 | 0 | 4 | 99  | 23,172               | 4 | 0 | 4 | 100 |
|                |               |               |              | LCCO       | 15,170               | 2 | 0 | 4 | 66  | 16,342               | 2 | 0 | 4 | 71  | 16,549               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 15,150               | 5 | 0 | 5 | 66  | 16,321               | 5 | 0 | 5 | 71  | 16,527               | 5 | 0 | 5 | 72  |

## Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

### LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product.

Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.






# D-Series Size 1 LED Area Luminaire

d#series



## Specifications

|                      |  |
|----------------------|--|
| <b>EPA:</b>          | 1.01 ft <sup>2</sup><br>(0.09 m <sup>2</sup> ) |
| <b>Length:</b>       | 33"<br>(83.8 cm)                               |
| <b>Width:</b>        | 13"<br>(33.0 cm)                               |
| <b>Height H1:</b>    | 7-1/2"<br>(19.0 cm)                            |
| <b>Height H2:</b>    | 3-1/2"   |
| <b>Weight (max):</b> | 27 lbs<br>(12.2 kg)                            |

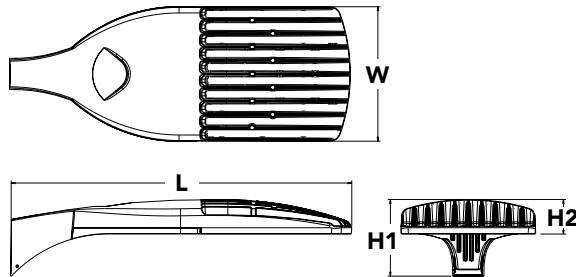

Catalog  
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

A+ Capable options indicated by this color background.

## Ordering Information

EXAMPLE: DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

| DSX1 LED        |                       | Color temperature |               | Distribution |                      | Voltage | Mounting                         |                          |                           |   |
|-----------------|-----------------------|-------------------|---------------|--------------|----------------------|---------|----------------------------------|--------------------------|---------------------------|---|
| Series          | LEDs                  |                   |               |              |                      |         |                                  |                          |                           |   |
| <b>DSX1 LED</b> | <b>Forward optics</b> | 30K               | 3000 K        | T1S          | Type I short         | T5VS    | Type V very short                | <b>MVOLT<sup>3</sup></b> | <b>Shipped included</b>   |   |
|                 | P1                    | 40K               | 4000 K        | T2S          | Type II short        | T5S     | Type V short                     | 120 <sup>4</sup>         | <b>SPA</b>                | <b>Square pole mounting</b>                                     |
|                 | P2                    | <b>50K</b>        | <b>5000 K</b> | T2M          | Type II medium       | T5M     | Type V medium                    | 208 <sup>4</sup>         | RPA                       | Round pole mounting   |
|                 | P3                    |                   |               | T3S          | Type III short       | T5W     | Type V wide                      | 240 <sup>4</sup>         | WBA                       | Wall bracket  |
|                 |                       |                   |               | T3M          | Type III medium      | BLC     | Backlight control <sup>2</sup>   | 277 <sup>4</sup>         | SPUMBA                    | Square pole universal mounting adaptor <sup>6</sup>             |
|                 | <b>Rotated optics</b> |                   |               | <b>T4M</b>   | Type IV medium       | LCCO    | Left corner cutoff <sup>2</sup>  | 347 <sup>4,5</sup>       | RPUMBA                    | Round pole universal mounting adaptor <sup>6</sup>              |
|                 | P10 <sup>1</sup>      |                   |               | TFTM         | Forward throw medium | RCCO    | Right corner cutoff <sup>2</sup> | 480 <sup>4,5</sup>       | <b>Shipped separately</b> |   |
|                 | P11 <sup>1</sup>      |                   |               |              |                      |         |                                  |                          | KMA8 DDBXD U              | Mast arm mounting bracket adaptor (specify finish) <sup>7</sup> |
|                 | P12 <sup>1</sup>      |                   |               |              |                      |         |                                  |                          |                           |   |
|                 | P13 <sup>1</sup>      |                   |               |              |                      |         |                                  |                          |                           |   |
|                 |                       |                   |               |              |                      |         |                                  |                          |                           |   |

| Control options   | Other options             | Finish (required) |                           |
|---|---------------------------|-------------------|---------------------------|
| <b>Shipped installed</b>  | <b>Shipped installed</b>  | DDBXD             | Dark bronze               |
| NLTAIR2   | HS                        | DBLXD             | Black                     |
| nLight AIR generation 2 enabled <sup>8</sup>  | SF                        | DNAXD             | Natural aluminum          |
| PIRHN   | DF                        | DWHXD             | White                     |
| Network, high/low motion/ambient sensor <sup>9</sup>  | L90                       | DBBTD             | Textured dark bronze      |
| PER   | R90                       | DBLBXD            | Textured black            |
| NEMA twist-lock receptacle only (controls ordered separate) <sup>10</sup>                                       | <b>Shipped separately</b> | DNATXD            | Textured natural aluminum |
| PER5  | BS                        | DWHGXD            | Textured white            |
| Five-pin receptacle only (controls ordered separate) <sup>10,11</sup>   | EGS                       |                   |                           |
| PER7  |                           |                   |                           |
| Seven-pin receptacle only (controls ordered separate) <sup>10,11</sup>  |                           |                   |                           |
| DMG   |                           |                   |                           |
| 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>12</sup> |                           |                   |                           |
| DS  |                           |                   |                           |
| Dual switching <sup>12,13,14</sup>  |                           |                   |                           |
| PIR   |                           |                   |                           |
| High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup>          |                           |                   |                           |
| PIRH  |                           |                   |                           |
| High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup>         |                           |                   |                           |
| PIR1FC3V  |                           |                   |                           |
| High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup>          |                           |                   |                           |
| PIRH1FC3V   |                           |                   |                           |
| Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup>         |                           |                   |                           |
| FAO   |                           |                   |                           |
| Field adjustable output <sup>14</sup>   |                           |                   |                           |



## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photocell - SSL twist-lock (120-277V) <sup>19</sup>                             |
| DLL347F 1.5 CUL JU | Photocell - SSL twist-lock (347V) <sup>19</sup>                                 |
| DLL480F 1.5 CUL JU | Photocell - SSL twist-lock (480V) <sup>19</sup>                                 |
| DSHORT SBK U       | Shorting cap <sup>19</sup>  |
| DSX1HS 30C U       | House-side shield for P1, P2, P3, P4 and P5 <sup>17</sup>                       |
| DSX1HS 40C U       | House-side shield for P6 and P7 <sup>17</sup>                                   |
| DSX1HS 60C U       | House-side shield for P8, P9, P10, P11 and P12 <sup>17</sup>                    |
| PUMBA DDBXD U*     | Square and round pole universal mounting bracket (specify finish) <sup>20</sup> |
| KMA8 DDBXD U       | Mast arm mounting bracket adaptor (specify finish) <sup>6</sup>                 |


For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAIR2. For more information on Light Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits with isolated neutral. See Outdoor Control Technical Guide for details.
- Reference Motion Sensor table on page 4.
- Reference controls options table on page 4 to see functionality.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.


## Options

### EGS - External Glare Shield

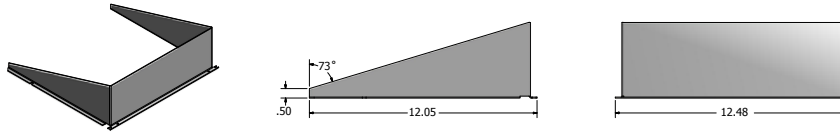

## Drilling

### HANDHOLE ORIENTATION




### Tenon Mounting Slipfitter\*\*

| Tenon O.D. | Mounting | Single Unit | 2 @ 180   | 2 @ 90    | 3 @ 120   | 3 @ 90    | 4 @ 90    |
|------------|----------|-------------|-----------|-----------|-----------|-----------|-----------|
| 2-3/8"     | SPA/RPA  | AS3-5 190   | AS3-5 280 | AS3-5 290 | AS3-5 320 | AS3-5 390 | AS3-5 490 |
|            | SPUMBA   | AS3-5 190   | AS3-5 280 | AS4-5 290 | AS3-5 320 | AS4-5 390 | AS4-5 490 |
|            | RUPUMBA  | AS3-5 190   | AS3-5 280 |           | AS3-5 320 |           |           |
| 2-7/8"     | SPA/RPA  | AST25-190   | AST25-280 | AST25-290 | AST25-320 | AST25-390 | AST25-490 |
|            | SPUMBA   | AST25-190   | AST25-280 |           | AST25-320 |           |           |
|            | RUPUMBA  | AST25-190   | AST25-280 |           | AST25-320 |           |           |
| 4"         | SPA/RPA  | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | SPUMBA   | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | RUPUMBA  | AST35-190   | AST35-280 |           | AST35-320 |           |           |

Template #8

Top of Pole

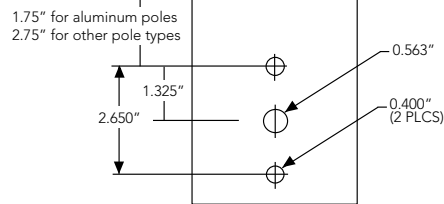

| Mounting Option    | Drilling Template | Single | 2 @ 180    | 2 @ 90     | 3 @ 90        | 3 @ 120         | 4 @ 90           |
|--------------------|-------------------|--------|------------|------------|---------------|-----------------|------------------|
| Head Location      |                   | Side B | Side B & D | Side B & C | Side B, C & D | Round Pole Only | Side A, B, C & D |
| Drill Nomenclature | #8                | DM19AS | DM28AS     | DM29AS     | DM39AS        | DM32AS          | DM49AS           |

|        | Drilling Template | Minimum Acceptable Outside Pole Dimension |        |      |      |      |      |
|--------|-------------------|---|--------|------|------|------|------|
| SPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| RPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| SPUMBA | #5                | 2-7/8"                                    | 3"     | 4"   | 4"   | 3.5" | 4"   |
| RPUMBA | #5                | 2-7/8"                                    | 3.5"   | 5"   | 5"   | 3.5" | 5"   |


# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).


Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

### LEGEND


- 0.1 fc
- 0.5 fc
- 1.0 fc




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.




Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.




Test No. LT.L23271 tested in accordance with IESNA LM-79-08.




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.




Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.




Test No. LT.L23271 tested in accordance with IESNA LM-79-08.




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.




Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.



Test No. LT.L23271 tested in accordance with IESNA LM-79-08.



Test No. LT.L23211 tested in accordance with IESNA LM-79-08.



Test No. LT.L23164B tested in accordance with IESNA LM-79-08.

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.04             |
| 5°C         | 41°F        | 1.04             |
| 10°C        | 50°F        | 1.03             |
| 15°C        | 59°F        | 1.02             |
| 20°C        | 68°F        | 1.01             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 0.99             |
| 35°C        | 95°F        | 0.98             |
| 40°C        | 104°F       | 0.97             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | Lumen Maintenance Factor |
|-----------------|--------------------------|
| 0               | 1.00                     |
| 25,000          | 0.96                     |
| 50,000          | 0.92                     |
| 100,000         | 0.85                     |

#### Motion Sensor Default Settings

| Option                 | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|------------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| PIR or PIRH            | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| *PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use when motion sensor is used as dusk to dawn control.

### Electrical Load

|                                      | Performance Package | LED Count | Drive Current | Wattage | Current (A) |      |      |      |      |      |
|--------------------------------------|---------------------|-----------|---------------|---------|-------------|------|------|------|------|------|
|                                      |                     |           |               |         | 120         | 208  | 240  | 277  | 347  | 480  |
| Forward Optics (Non-Rotated)         | P1                  | 30        | 530           | 54      | 0.45        | 0.26 | 0.23 | 0.19 | 0.10 | 0.12 |
|                                      | P2                  | 30        | 700           | 70      | 0.59        | 0.34 | 0.30 | 0.25 | 0.20 | 0.16 |
|                                      | P3                  | 30        | 1050          | 102     | 0.86        | 0.50 | 0.44 | 0.38 | 0.30 | 0.22 |
|                                      | P4                  | 30        | 1250          | 125     | 1.06        | 0.60 | 0.52 | 0.46 | 0.37 | 0.27 |
|                                      | P5                  | 30        | 1400          | 138     | 1.16        | 0.67 | 0.58 | 0.51 | 0.40 | 0.29 |
|                                      | P6                  | 40        | 1250          | 163     | 1.36        | 0.78 | 0.68 | 0.59 | 0.47 | 0.34 |
|                                      | P7                  | 40        | 1400          | 183     | 1.53        | 0.88 | 0.76 | 0.66 | 0.53 | 0.38 |
|                                      | P8                  | 60        | 1050          | 207     | 1.74        | 0.98 | 0.87 | 0.76 | 0.64 | 0.49 |
|                                      | P9                  | 60        | 1250          | 241     | 2.01        | 1.16 | 1.01 | 0.89 | 0.70 | 0.51 |
| Rotated Optics (Requires L90 or R90) | P10                 | 60        | 530           | 106     | 0.90        | 0.52 | 0.47 | 0.43 | 0.33 | 0.27 |
|                                      | P11                 | 60        | 700           | 137     | 1.15        | 0.67 | 0.60 | 0.53 | 0.42 | 0.32 |
|                                      | P12                 | 60        | 1050          | 207     | 1.74        | 0.99 | 0.87 | 0.76 | 0.60 | 0.46 |
|                                      | P13                 | 60        | 1250          | 231     | 1.93        | 1.12 | 0.97 | 0.86 | 0.67 | 0.49 |

#### Controls Options

| Nomenclature  | Description   | Functionality   | Primary control device  | Notes  |
|---------------|---|---|---|--|
| FA0           | Field adjustable output device installed inside the luminaire; wired to the driver dimming leads. | Allows the luminaire to be manually dimmed, effectively trimming the light output.  | FA0 device  | Cannot be used with other controls options that need the 0-10V leads                                 |
| DS            | Drivers wired independently for 50/50 luminaire operation   | The luminaire is wired to two separate circuits, allowing for 50/50 operation.  | Independently wired drivers   | Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative. |
| PERS or PER7  | Twist-lock photocell receptacle   | Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.              | Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM. | Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire                        |
| PIR or PIRH   | Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting          | Luminaires dim when no occupancy is detected.   | Acuity Controls SBOR  | Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.          |
| NLTAIR2 PIRHN | nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.            | Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse. | nLight Air rSDGR  | nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.    |



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 30             | 530           | P1            | 54W          | T1S        | 6,457                | 2 | 0 | 2 | 120 | 6,956                | 2 | 0 | 2 | 129 | 7,044                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2S        | 6,450                | 2 | 0 | 2 | 119 | 6,949                | 2 | 0 | 2 | 129 | 7,037                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2M        | 6,483                | 1 | 0 | 1 | 120 | 6,984                | 2 | 0 | 2 | 129 | 7,073                | 2 | 0 | 2 | 131 |
|                |               |               |              | T3S        | 6,279                | 2 | 0 | 2 | 116 | 6,764                | 2 | 0 | 2 | 125 | 6,850                | 2 | 0 | 2 | 127 |
|                |               |               |              | T3M        | 6,468                | 1 | 0 | 2 | 120 | 6,967                | 1 | 0 | 2 | 129 | 7,056                | 1 | 0 | 2 | 131 |
|                |               |               |              | T4M        | 6,327                | 1 | 0 | 2 | 117 | 6,816                | 1 | 0 | 2 | 126 | 6,902                | 1 | 0 | 2 | 128 |
|                |               |               |              | TFTM       | 6,464                | 1 | 0 | 2 | 120 | 6,963                | 1 | 0 | 2 | 129 | 7,051                | 1 | 0 | 2 | 131 |
|                |               |               |              | TSVS       | 6,722                | 2 | 0 | 0 | 124 | 7,242                | 3 | 0 | 0 | 134 | 7,334                | 3 | 0 | 0 | 136 |
|                |               |               |              | T5S        | 6,728                | 2 | 0 | 1 | 125 | 7,248                | 2 | 0 | 1 | 134 | 7,340                | 2 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 6,711                | 3 | 0 | 1 | 124 | 7,229                | 3 | 0 | 1 | 134 | 7,321                | 3 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 6,667                | 3 | 0 | 2 | 123 | 7,182                | 3 | 0 | 2 | 133 | 7,273                | 3 | 0 | 2 | 135 |
|                |               |               |              | BLC        | 5,299                | 1 | 0 | 1 | 98  | 5,709                | 1 | 0 | 2 | 106 | 5,781                | 1 | 0 | 2 | 107 |
|                |               |               |              | LCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
|                |               |               |              | RCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
| 30             | 700           | P2            | 70W          | T1S        | 8,249                | 2 | 0 | 2 | 118 | 8,886                | 2 | 0 | 2 | 127 | 8,999                | 2 | 0 | 2 | 129 |
|                |               |               |              | T2S        | 8,240                | 2 | 0 | 2 | 118 | 8,877                | 2 | 0 | 2 | 127 | 8,989                | 2 | 0 | 2 | 128 |
|                |               |               |              | T2M        | 8,283                | 2 | 0 | 2 | 118 | 8,923                | 2 | 0 | 2 | 127 | 9,036                | 2 | 0 | 2 | 129 |
|                |               |               |              | T3S        | 8,021                | 2 | 0 | 2 | 115 | 8,641                | 2 | 0 | 2 | 123 | 8,751                | 2 | 0 | 2 | 125 |
|                |               |               |              | T3M        | 8,263                | 2 | 0 | 2 | 118 | 8,901                | 2 | 0 | 2 | 127 | 9,014                | 2 | 0 | 2 | 129 |
|                |               |               |              | T4M        | 8,083                | 2 | 0 | 2 | 115 | 8,708                | 2 | 0 | 2 | 124 | 8,818                | 2 | 0 | 2 | 126 |
|                |               |               |              | TFTM       | 8,257                | 2 | 0 | 2 | 118 | 8,896                | 2 | 0 | 2 | 127 | 9,008                | 2 | 0 | 2 | 129 |
|                |               |               |              | TSVS       | 8,588                | 3 | 0 | 0 | 123 | 9,252                | 3 | 0 | 0 | 132 | 9,369                | 3 | 0 | 0 | 134 |
|                |               |               |              | T5S        | 8,595                | 3 | 0 | 1 | 123 | 9,259                | 3 | 0 | 1 | 132 | 9,376                | 3 | 0 | 1 | 134 |
|                |               |               |              | T5M        | 8,573                | 3 | 0 | 2 | 122 | 9,236                | 3 | 0 | 2 | 132 | 9,353                | 3 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 8,517                | 3 | 0 | 2 | 122 | 9,175                | 4 | 0 | 2 | 131 | 9,291                | 4 | 0 | 2 | 133 |
|                |               |               |              | BLC        | 6,770                | 1 | 0 | 2 | 97  | 7,293                | 1 | 0 | 2 | 104 | 7,386                | 1 | 0 | 2 | 106 |
|                |               |               |              | LCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
|                |               |               |              | RCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
| 30             | 1050          | P3            | 102W         | T1S        | 11,661               | 2 | 0 | 2 | 114 | 12,562               | 3 | 0 | 3 | 123 | 12,721               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2S        | 11,648               | 2 | 0 | 2 | 114 | 12,548               | 3 | 0 | 3 | 123 | 12,707               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2M        | 11,708               | 2 | 0 | 2 | 115 | 12,613               | 2 | 0 | 2 | 124 | 12,773               | 2 | 0 | 2 | 125 |
|                |               |               |              | T3S        | 11,339               | 2 | 0 | 2 | 111 | 12,215               | 3 | 0 | 3 | 120 | 12,370               | 3 | 0 | 3 | 121 |
|                |               |               |              | T3M        | 11,680               | 2 | 0 | 2 | 115 | 12,582               | 2 | 0 | 2 | 123 | 12,742               | 2 | 0 | 2 | 125 |
|                |               |               |              | T4M        | 11,426               | 2 | 0 | 3 | 112 | 12,309               | 2 | 0 | 3 | 121 | 12,465               | 2 | 0 | 3 | 122 |
|                |               |               |              | TFTM       | 11,673               | 2 | 0 | 2 | 114 | 12,575               | 2 | 0 | 3 | 123 | 12,734               | 2 | 0 | 3 | 125 |
|                |               |               |              | TSVS       | 12,140               | 3 | 0 | 1 | 119 | 13,078               | 3 | 0 | 1 | 128 | 13,244               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5S        | 12,150               | 3 | 0 | 1 | 119 | 13,089               | 3 | 0 | 1 | 128 | 13,254               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5M        | 12,119               | 4 | 0 | 2 | 119 | 13,056               | 4 | 0 | 2 | 128 | 13,221               | 4 | 0 | 2 | 130 |
|                |               |               |              | TSW        | 12,040               | 4 | 0 | 3 | 118 | 12,970               | 4 | 0 | 3 | 127 | 13,134               | 4 | 0 | 3 | 129 |
|                |               |               |              | BLC        | 9,570                | 1 | 0 | 2 | 94  | 10,310               | 1 | 0 | 2 | 101 | 10,440               | 1 | 0 | 2 | 102 |
|                |               |               |              | LCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
|                |               |               |              | RCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
| 30             | 1250          | P4            | 125W         | T1S        | 13,435               | 3 | 0 | 3 | 107 | 14,473               | 3 | 0 | 3 | 116 | 14,657               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2S        | 13,421               | 3 | 0 | 3 | 107 | 14,458               | 3 | 0 | 3 | 116 | 14,641               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2M        | 13,490               | 2 | 0 | 2 | 108 | 14,532               | 3 | 0 | 3 | 116 | 14,716               | 3 | 0 | 3 | 118 |
|                |               |               |              | T3S        | 13,064               | 3 | 0 | 3 | 105 | 14,074               | 3 | 0 | 3 | 113 | 14,252               | 3 | 0 | 3 | 114 |
|                |               |               |              | T3M        | 13,457               | 2 | 0 | 2 | 108 | 14,497               | 2 | 0 | 2 | 116 | 14,681               | 2 | 0 | 2 | 117 |
|                |               |               |              | T4M        | 13,165               | 2 | 0 | 3 | 105 | 14,182               | 2 | 0 | 3 | 113 | 14,362               | 2 | 0 | 3 | 115 |
|                |               |               |              | TFTM       | 13,449               | 2 | 0 | 3 | 108 | 14,488               | 2 | 0 | 3 | 116 | 14,672               | 2 | 0 | 3 | 117 |
|                |               |               |              | TSVS       | 13,987               | 4 | 0 | 1 | 112 | 15,068               | 4 | 0 | 1 | 121 | 15,259               | 4 | 0 | 1 | 122 |
|                |               |               |              | T5S        | 13,999               | 3 | 0 | 1 | 112 | 15,080               | 3 | 0 | 1 | 121 | 15,271               | 3 | 0 | 1 | 122 |
|                |               |               |              | T5M        | 13,963               | 4 | 0 | 2 | 112 | 15,042               | 4 | 0 | 2 | 120 | 15,233               | 4 | 0 | 2 | 122 |
|                |               |               |              | TSW        | 13,872               | 4 | 0 | 3 | 111 | 14,944               | 4 | 0 | 3 | 120 | 15,133               | 4 | 0 | 3 | 121 |
|                |               |               |              | BLC        | 11,027               | 1 | 0 | 2 | 88  | 11,879               | 1 | 0 | 2 | 95  | 12,029               | 1 | 0 | 2 | 96  |
|                |               |               |              | LCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
| 30             | 1400          | P5            | 138W         | T1S        | 14,679               | 3 | 0 | 3 | 106 | 15,814               | 3 | 0 | 3 | 115 | 16,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 14,664               | 3 | 0 | 3 | 106 | 15,797               | 3 | 0 | 3 | 114 | 15,997               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2M        | 14,739               | 3 | 0 | 3 | 107 | 15,878               | 3 | 0 | 3 | 115 | 16,079               | 3 | 0 | 3 | 117 |
|                |               |               |              | T3S        | 14,274               | 3 | 0 | 3 | 103 | 15,377               | 3 | 0 | 3 | 111 | 15,572               | 3 | 0 | 3 | 113 |
|                |               |               |              | T3M        | 14,704               | 2 | 0 | 3 | 107 | 15,840               | 3 | 0 | 3 | 115 | 16,040               | 3 | 0 | 3 | 116 |
|                |               |               |              | T4M        | 14,384               | 2 | 0 | 3 | 104 | 15,496               | 3 | 0 | 3 | 112 | 15,692               | 3 | 0 | 3 | 114 |
|                |               |               |              | TFTM       | 14,695               | 2 | 0 | 3 | 106 | 15,830               | 3 | 0 | 3 | 115 | 16,030               | 3 | 0 | 3 | 116 |
|                |               |               |              | TSVS       | 15,283               | 4 | 0 | 1 | 111 | 16,464               | 4 | 0 | 1 | 119 | 16,672               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 15,295               | 3 | 0 | 1 | 111 | 16,477               | 4 | 0 | 1 | 119 | 16,686               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5M        | 15,257               | 4 | 0 | 2 | 111 | 16,435               | 4 | 0 | 2 | 119 | 16,644               | 4 | 0 | 2 | 121 |
|                |               |               |              | TSW        | 15,157               | 4 | 0 | 3 | 110 | 16,328               | 4 | 0 | 3 | 118 | 16,534               | 4 | 0 | 3 | 120 |
|                |               |               |              | BLC        | 12,048               | 1 | 0 | 2 | 87  | 12,979               | 1 | 0 | 2 | 94  | 13,143               | 1 | 0 | 2 | 95  |
|                |               |               |              | LCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |
|                |               |               |              | RCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 40             | 1250          | P6            | 163W         | T1S        | 17,654               | 3 | 0 | 3 | 108 | 19,018               | 3 | 0 | 3 | 117 | 19,259               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2S        | 17,635               | 3 | 0 | 3 | 108 | 18,998               | 3 | 0 | 3 | 117 | 19,238               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2M        | 17,726               | 3 | 0 | 3 | 109 | 19,096               | 3 | 0 | 3 | 117 | 19,337               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 17,167               | 3 | 0 | 3 | 105 | 18,493               | 3 | 0 | 3 | 113 | 18,727               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3M        | 17,683               | 3 | 0 | 3 | 108 | 19,049               | 3 | 0 | 3 | 117 | 19,290               | 3 | 0 | 3 | 118 |
|                |               |               |              | T4M        | 17,299               | 3 | 0 | 3 | 106 | 18,635               | 3 | 0 | 4 | 114 | 18,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 17,672               | 3 | 0 | 3 | 108 | 19,038               | 3 | 0 | 4 | 117 | 19,279               | 3 | 0 | 4 | 118 |
|                |               |               |              | TSVS       | 18,379               | 4 | 0 | 1 | 113 | 19,800               | 4 | 0 | 1 | 121 | 20,050               | 4 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 18,394               | 4 | 0 | 2 | 113 | 19,816               | 4 | 0 | 2 | 122 | 20,066               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 18,348               | 4 | 0 | 2 | 113 | 19,766               | 4 | 0 | 2 | 121 | 20,016               | 4 | 0 | 2 | 123 |
|                |               |               |              | TSW        | 18,228               | 5 | 0 | 3 | 112 | 19,636               | 5 | 0 | 3 | 120 | 19,885               | 5 | 0 | 3 | 122 |
|                |               |               |              | BLC        | 14,489               | 2 | 0 | 2 | 89  | 15,609               | 2 | 0 | 3 | 96  | 15,806               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
| 40             | 1400          | P7            | 183W         | T1S        | 19,227               | 3 | 0 | 3 | 105 | 20,712               | 3 | 0 | 3 | 113 | 20,975               | 3 | 0 | 3 | 115 |
|                |               |               |              | T2S        | 19,206               | 3 | 0 | 3 | 105 | 20,690               | 3 | 0 | 3 | 113 | 20,952               | 3 | 0 | 3 | 114 |
|                |               |               |              | T2M        | 19,305               | 3 | 0 | 3 | 105 | 20,797               | 3 | 0 | 3 | 114 | 21,060               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3S        | 18,696               | 3 | 0 | 3 | 102 | 20,141               | 3 | 0 | 3 | 110 | 20,396               | 3 | 0 | 4 | 111 |
|                |               |               |              | T3M        | 19,258               | 3 | 0 | 3 | 105 | 20,746               | 3 | 0 | 3 | 113 | 21,009               | 3 | 0 | 3 | 115 |
|                |               |               |              | T4M        | 18,840               | 3 | 0 | 4 | 103 | 20,296               | 3 | 0 | 4 | 111 | 20,553               | 3 | 0 | 4 | 112 |
|                |               |               |              | TFTM       | 19,246               | 3 | 0 | 4 | 105 | 20,734               | 3 | 0 | 4 | 113 | 20,996               | 3 | 0 | 4 | 115 |
|                |               |               |              | TSVS       | 20,017               | 4 | 0 | 1 | 109 | 21,564               | 4 | 0 | 1 | 118 | 21,837               | 4 | 0 | 1 | 119 |
|                |               |               |              | T5S        | 20,033               | 4 | 0 | 2 | 109 | 21,581               | 4 | 0 | 2 | 118 | 21,854               | 4 | 0 | 2 | 119 |
|                |               |               |              | T5M        | 19,983               | 4 | 0 | 2 | 109 | 21,527               | 5 | 0 | 3 | 118 | 21,799               | 5 | 0 | 3 | 119 |
|                |               |               |              | TSW        | 19,852               | 5 | 0 | 3 | 108 | 21,386               | 5 | 0 | 3 | 117 | 21,656               | 5 | 0 | 3 | 118 |
|                |               |               |              | BLC        | 15,780               | 2 | 0 | 3 | 86  | 16,999               | 2 | 0 | 3 | 93  | 17,214               | 2 | 0 | 3 | 94  |
|                |               |               |              | LCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
|                |               |               |              | RCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
| 60             | 1050          | P8            | 207W         | T1S        | 22,490               | 3 | 0 | 3 | 109 | 24,228               | 3 | 0 | 3 | 117 | 24,535               | 3 | 0 | 3 | 119 |
|                |               |               |              | T2S        | 22,466               | 3 | 0 | 4 | 109 | 24,202               | 3 | 0 | 4 | 117 | 24,509               | 3 | 0 | 4 | 118 |
|                |               |               |              | T2M        | 22,582               | 3 | 0 | 3 | 109 | 24,327               | 3 | 0 | 3 | 118 | 24,635               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 21,870               | 3 | 0 | 4 | 106 | 23,560               | 3 | 0 | 4 | 114 | 23,858               | 3 | 0 | 4 | 115 |
|                |               |               |              | T3M        | 22,527               | 3 | 0 | 4 | 109 | 24,268               | 3 | 0 | 4 | 117 | 24,575               | 3 | 0 | 4 | 119 |
|                |               |               |              | T4M        | 22,038               | 3 | 0 | 4 | 106 | 23,741               | 3 | 0 | 4 | 115 | 24,041               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 22,513               | 3 | 0 | 4 | 109 | 24,253               | 3 | 0 | 4 | 117 | 24,560               | 3 | 0 | 4 | 119 |
|                |               |               |              | TSVS       | 23,415               | 5 | 0 | 1 | 113 | 25,224               | 5 | 0 | 1 | 122 | 25,543               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 23,434               | 4 | 0 | 2 | 113 | 25,244               | 4 | 0 | 2 | 122 | 25,564               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,221               | 5 | 0 | 4 | 112 | 25,016               | 5 | 0 | 4 | 121 | 25,332               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 18,458               | 2 | 0 | 3 | 89  | 19,885               | 2 | 0 | 3 | 96  | 20,136               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
| 60             | 1250          | P9            | 241W         | T1S        | 25,575               | 3 | 0 | 3 | 106 | 27,551               | 3 | 0 | 3 | 114 | 27,900               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 25,548               | 3 | 0 | 4 | 106 | 27,522               | 3 | 0 | 4 | 114 | 27,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | T2M        | 25,680               | 3 | 0 | 3 | 107 | 27,664               | 3 | 0 | 3 | 115 | 28,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T3S        | 24,870               | 3 | 0 | 4 | 103 | 26,791               | 3 | 0 | 4 | 111 | 27,130               | 3 | 0 | 4 | 113 |
|                |               |               |              | T3M        | 25,617               | 3 | 0 | 4 | 106 | 27,597               | 3 | 0 | 4 | 115 | 27,946               | 3 | 0 | 4 | 116 |
|                |               |               |              | T4M        | 25,061               | 3 | 0 | 4 | 104 | 26,997               | 3 | 0 | 4 | 112 | 27,339               | 3 | 0 | 4 | 113 |
|                |               |               |              | TFTM       | 25,602               | 3 | 0 | 4 | 106 | 27,580               | 3 | 0 | 4 | 114 | 27,929               | 3 | 0 | 4 | 116 |
|                |               |               |              | TSVS       | 26,626               | 5 | 0 | 1 | 110 | 28,684               | 5 | 0 | 1 | 119 | 29,047               | 5 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 26,648               | 4 | 0 | 2 | 111 | 28,707               | 5 | 0 | 2 | 119 | 29,070               | 5 | 0 | 2 | 121 |
|                |               |               |              | T5M        | 26,581               | 5 | 0 | 3 | 110 | 28,635               | 5 | 0 | 3 | 119 | 28,997               | 5 | 0 | 3 | 120 |
|                |               |               |              | TSW        | 26,406               | 5 | 0 | 4 | 110 | 28,447               | 5 | 0 | 4 | 118 | 28,807               | 5 | 0 | 4 | 120 |
|                |               |               |              | BLC        | 20,990               | 2 | 0 | 3 | 87  | 22,612               | 2 | 0 | 3 | 94  | 22,898               | 2 | 0 | 3 | 95  |
|                |               |               |              | LCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |
|                |               |               |              | RCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Rotated Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 60             | 530           | P10           | 106W         | T1S        | 13,042               | 3 | 0 | 3 | 123 | 14,050               | 3 | 0 | 3 | 133 | 14,228               | 3 | 0 | 3 | 134 |
|                |               |               |              | T2S        | 12,967               | 4 | 0 | 4 | 122 | 13,969               | 4 | 0 | 4 | 132 | 14,146               | 4 | 0 | 4 | 133 |
|                |               |               |              | T2M        | 13,201               | 3 | 0 | 3 | 125 | 14,221               | 3 | 0 | 3 | 134 | 14,401               | 3 | 0 | 3 | 136 |
|                |               |               |              | T3S        | 12,766               | 4 | 0 | 4 | 120 | 13,752               | 4 | 0 | 4 | 130 | 13,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | T3M        | 13,193               | 4 | 0 | 4 | 124 | 14,213               | 4 | 0 | 4 | 134 | 14,393               | 4 | 0 | 4 | 136 |
|                |               |               |              | T4M        | 12,944               | 4 | 0 | 4 | 122 | 13,945               | 4 | 0 | 4 | 132 | 14,121               | 4 | 0 | 4 | 133 |
|                |               |               |              | TFTM       | 13,279               | 4 | 0 | 4 | 125 | 14,305               | 4 | 0 | 4 | 135 | 14,486               | 4 | 0 | 4 | 137 |
|                |               |               |              | TSVS       | 13,372               | 3 | 0 | 1 | 126 | 14,405               | 4 | 0 | 1 | 136 | 14,588               | 4 | 0 | 1 | 138 |
|                |               |               |              | T5S        | 13,260               | 3 | 0 | 1 | 125 | 14,284               | 3 | 0 | 1 | 135 | 14,465               | 3 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 13,256               | 4 | 0 | 2 | 125 | 14,281               | 4 | 0 | 2 | 135 | 14,462               | 4 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 13,137               | 4 | 0 | 3 | 124 | 14,153               | 4 | 0 | 3 | 134 | 14,332               | 4 | 0 | 3 | 135 |
|                |               |               |              | BLC        | 10,906               | 3 | 0 | 3 | 103 | 11,749               | 3 | 0 | 3 | 111 | 11,898               | 3 | 0 | 3 | 112 |
|                |               |               |              | LCCO       | 7,789                | 1 | 0 | 3 | 73  | 8,391                | 1 | 0 | 3 | 79  | 8,497                | 1 | 0 | 3 | 80  |
|                |               |               |              | RCCO       | 7,779                | 4 | 0 | 4 | 73  | 8,380                | 4 | 0 | 4 | 79  | 8,486                | 4 | 0 | 4 | 80  |
| 60             | 700           | P11           | 137W         | T1S        | 16,556               | 3 | 0 | 3 | 121 | 17,835               | 3 | 0 | 3 | 130 | 18,061               | 4 | 0 | 4 | 132 |
|                |               |               |              | T2S        | 16,461               | 4 | 0 | 4 | 120 | 17,733               | 4 | 0 | 4 | 129 | 17,957               | 4 | 0 | 4 | 131 |
|                |               |               |              | T2M        | 16,758               | 4 | 0 | 4 | 122 | 18,053               | 4 | 0 | 4 | 132 | 18,281               | 4 | 0 | 4 | 133 |
|                |               |               |              | T3S        | 16,205               | 4 | 0 | 4 | 118 | 17,457               | 4 | 0 | 4 | 127 | 17,678               | 4 | 0 | 4 | 129 |
|                |               |               |              | T3M        | 16,748               | 4 | 0 | 4 | 122 | 18,042               | 4 | 0 | 4 | 132 | 18,271               | 4 | 0 | 4 | 133 |
|                |               |               |              | T4M        | 16,432               | 4 | 0 | 4 | 120 | 17,702               | 4 | 0 | 4 | 129 | 17,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | TFTM       | 16,857               | 4 | 0 | 4 | 123 | 18,159               | 4 | 0 | 4 | 133 | 18,389               | 4 | 0 | 4 | 134 |
|                |               |               |              | TSVS       | 16,975               | 4 | 0 | 1 | 124 | 18,287               | 4 | 0 | 1 | 133 | 18,518               | 4 | 0 | 1 | 135 |
|                |               |               |              | T5S        | 16,832               | 4 | 0 | 1 | 123 | 18,133               | 4 | 0 | 2 | 132 | 18,362               | 4 | 0 | 2 | 134 |
|                |               |               |              | T5M        | 16,828               | 4 | 0 | 2 | 123 | 18,128               | 4 | 0 | 2 | 132 | 18,358               | 4 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 16,677               | 4 | 0 | 3 | 122 | 17,966               | 5 | 0 | 3 | 131 | 18,193               | 5 | 0 | 3 | 133 |
|                |               |               |              | BLC        | 13,845               | 3 | 0 | 3 | 101 | 14,915               | 3 | 0 | 3 | 109 | 15,103               | 3 | 0 | 3 | 110 |
|                |               |               |              | LCCO       | 9,888                | 1 | 0 | 3 | 72  | 10,652               | 2 | 0 | 3 | 78  | 10,787               | 2 | 0 | 3 | 79  |
|                |               |               |              | RCCO       | 9,875                | 4 | 0 | 4 | 72  | 10,638               | 4 | 0 | 4 | 78  | 10,773               | 4 | 0 | 4 | 79  |
| 60             | 1050          | P12           | 207W         | T1S        | 22,996               | 4 | 0 | 4 | 111 | 24,773               | 4 | 0 | 4 | 120 | 25,087               | 4 | 0 | 4 | 121 |
|                |               |               |              | T2S        | 22,864               | 4 | 0 | 4 | 110 | 24,631               | 5 | 0 | 5 | 119 | 24,943               | 5 | 0 | 5 | 120 |
|                |               |               |              | T2M        | 23,277               | 4 | 0 | 4 | 112 | 25,075               | 4 | 0 | 4 | 121 | 25,393               | 4 | 0 | 4 | 123 |
|                |               |               |              | T3S        | 22,509               | 4 | 0 | 4 | 109 | 24,248               | 5 | 0 | 5 | 117 | 24,555               | 5 | 0 | 5 | 119 |
|                |               |               |              | T3M        | 23,263               | 4 | 0 | 4 | 112 | 25,061               | 4 | 0 | 4 | 121 | 25,378               | 4 | 0 | 4 | 123 |
|                |               |               |              | T4M        | 22,824               | 5 | 0 | 5 | 110 | 24,588               | 5 | 0 | 5 | 119 | 24,899               | 5 | 0 | 5 | 120 |
|                |               |               |              | TFTM       | 23,414               | 5 | 0 | 5 | 113 | 25,223               | 5 | 0 | 5 | 122 | 25,543               | 5 | 0 | 5 | 123 |
|                |               |               |              | TSVS       | 23,579               | 5 | 0 | 1 | 114 | 25,401               | 5 | 0 | 1 | 123 | 25,722               | 5 | 0 | 1 | 124 |
|                |               |               |              | T5S        | 23,380               | 4 | 0 | 2 | 113 | 25,187               | 4 | 0 | 2 | 122 | 25,506               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,165               | 5 | 0 | 4 | 112 | 24,955               | 5 | 0 | 4 | 121 | 25,271               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 19,231               | 4 | 0 | 4 | 93  | 20,717               | 4 | 0 | 4 | 100 | 20,979               | 4 | 0 | 4 | 101 |
|                |               |               |              | LCCO       | 13,734               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,716               | 4 | 0 | 4 | 66  | 14,776               | 4 | 0 | 4 | 71  | 14,963               | 4 | 0 | 4 | 72  |
| 60             | 1250          | P13           | 231W         | T1S        | 25,400               | 4 | 0 | 4 | 110 | 27,363               | 4 | 0 | 4 | 118 | 27,709               | 4 | 0 | 4 | 120 |
|                |               |               |              | T2S        | 25,254               | 5 | 0 | 5 | 109 | 27,205               | 5 | 0 | 5 | 118 | 27,550               | 5 | 0 | 5 | 119 |
|                |               |               |              | T2M        | 25,710               | 4 | 0 | 4 | 111 | 27,696               | 4 | 0 | 4 | 120 | 28,047               | 4 | 0 | 4 | 121 |
|                |               |               |              | T3S        | 24,862               | 5 | 0 | 5 | 108 | 26,783               | 5 | 0 | 5 | 116 | 27,122               | 5 | 0 | 5 | 117 |
|                |               |               |              | T3M        | 25,695               | 5 | 0 | 5 | 111 | 27,680               | 5 | 0 | 5 | 120 | 28,031               | 5 | 0 | 5 | 121 |
|                |               |               |              | T4M        | 25,210               | 5 | 0 | 5 | 109 | 27,158               | 5 | 0 | 5 | 118 | 27,502               | 5 | 0 | 5 | 119 |
|                |               |               |              | TFTM       | 25,861               | 5 | 0 | 5 | 112 | 27,860               | 5 | 0 | 5 | 121 | 28,212               | 5 | 0 | 5 | 122 |
|                |               |               |              | TSVS       | 26,043               | 5 | 0 | 1 | 113 | 28,056               | 5 | 0 | 1 | 121 | 28,411               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 25,824               | 4 | 0 | 2 | 112 | 27,819               | 5 | 0 | 2 | 120 | 28,172               | 5 | 0 | 2 | 122 |
|                |               |               |              | T5M        | 25,818               | 5 | 0 | 3 | 112 | 27,813               | 5 | 0 | 3 | 120 | 28,165               | 5 | 0 | 3 | 122 |
|                |               |               |              | TSW        | 25,586               | 5 | 0 | 4 | 111 | 27,563               | 5 | 0 | 4 | 119 | 27,912               | 5 | 0 | 4 | 121 |
|                |               |               |              | BLC        | 21,241               | 4 | 0 | 4 | 92  | 22,882               | 4 | 0 | 4 | 99  | 23,172               | 4 | 0 | 4 | 100 |
|                |               |               |              | LCCO       | 15,170               | 2 | 0 | 4 | 66  | 16,342               | 2 | 0 | 4 | 71  | 16,549               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 15,150               | 5 | 0 | 5 | 66  | 16,321               | 5 | 0 | 5 | 71  | 16,527               | 5 | 0 | 5 | 72  |

## Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

### LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product.

Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.





# D-Series Size 1 LED Area Luminaire

d#series




|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

|                      |  |
|----------------------|--|
| <b>EPA:</b>          | 1.01 ft <sup>2</sup><br>(0.09 m <sup>2</sup> ) |
| <b>Length:</b>       | 33"<br>(83.8 cm)                               |
| <b>Width:</b>        | 13"<br>(33.0 cm)                               |
| <b>Height H1:</b>    | 7-1/2"<br>(19.0 cm)                            |
| <b>Height H2:</b>    | 3-1/2"   |
| <b>Weight (max):</b> | 27 lbs<br>(12.2 kg)                            |

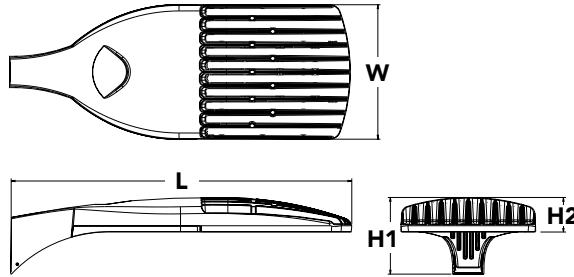

## Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

A+ Capable options indicated by this color background.

## Ordering Information

**EXAMPLE:** DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

| DSX1 LED        |   |                          |                                   |  |   |  |  |
|-----------------|---|--------------------------|-----------------------------------|--|---|--|--|
| Series          | LEDs  | Color temperature        |                                   | Distribution   |   | Voltage  | Mounting   |
| <b>DSX1 LED</b> | <b>Forward optics</b><br>P1 <b>P4</b> P7<br>P2 P5 P8<br>P3 P6 P9<br><b>Rotated optics</b><br>P10 <sup>1</sup> P12 <sup>1</sup><br>P11 <sup>1</sup> P13 <sup>1</sup> | 30K<br>40K<br><b>50K</b> | 3000 K<br>4000 K<br><b>5000 K</b> | T1S Type I short<br>T2S Type II short<br>T2M Type II medium<br>T3S Type III short<br>T3M Type III medium<br><b>T4M</b> Type IV medium<br>TFTM Forward throw medium | T5VS Type V very short<br>T5S Type V short<br>T5M Type V medium<br>T5W Type V wide<br>BLC Backlight control <sup>2</sup><br>LCCO Left corner cutoff <sup>2</sup><br>RCCO Right corner cutoff <sup>2</sup> | <b>MVOLT<sup>3</sup></b><br>120 <sup>4</sup><br>208 <sup>4</sup><br>240 <sup>4</sup><br>277 <sup>4</sup><br>347 <sup>4,5</sup><br>480 <sup>4,5</sup> | <b>Shipped included</b><br>SPA Square pole mounting<br>RPA Round pole mounting<br><b>WBA</b> <b>Wall bracket</b><br>SPUMBA Square pole universal mounting adaptor <sup>6</sup><br>RPUMBA Round pole universal mounting adaptor <sup>6</sup><br><b>Shipped separately</b><br>KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) <sup>7</sup> |

| Control options  | Other options   | Finish (required)   |
|--|---|---|
| <b>Shipped installed</b><br>NLTAIR2 nLight AIR generation 2 enabled <sup>8</sup><br>PIRHN Network, high/low motion/ambient sensor <sup>9</sup><br>PER NEMA twist-lock receptacle only (controls ordered separate) <sup>10</sup><br>PER5 Five-pin receptacle only (controls ordered separate) <sup>10,11</sup><br>PER7 Seven-pin receptacle only (controls ordered separate) <sup>10,11</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>12</sup><br>DS Dual switching <sup>12,13,14</sup> | PIR High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup><br>PIRH High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup><br>PIR1FC3V High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup><br>PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup><br>FAO Field adjustable output <sup>14</sup> | <b>Shipped installed</b><br>HS House-side shield <sup>17</sup><br>SF Single fuse (120, 277, 347V) <sup>4</sup><br>DF Double fuse (208, 240, 480V) <sup>4</sup><br>L90 Left rotated optics <sup>1</sup><br>R90 Right rotated optics <sup>1</sup><br><b>Shipped separately</b><br>BS Bird spikes <sup>18</sup><br>EGS External glare shield <sup>18</sup> |
|  |   | DDBXD Dark bronze<br>DBLXD Black<br>DNAXD Natural aluminum<br>DWHXD White<br>DDBTXD Textured dark bronze<br>DBLBXD Textured black<br>DNATXD Textured natural aluminum<br>DWHGXD Textured white  |



## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photocell - SSL twist-lock (120-277V) <sup>19</sup>                             |
| DLL347F 1.5 CUL JU | Photocell - SSL twist-lock (347V) <sup>19</sup>                                 |
| DLL480F 1.5 CUL JU | Photocell - SSL twist-lock (480V) <sup>19</sup>                                 |
| DSHORT SBK U       | Shorting cap <sup>19</sup>  |
| DSX1HS 30C U       | House-side shield for P1, P2, P3, P4 and P5 <sup>17</sup>                       |
| DSX1HS 40C U       | House-side shield for P6 and P7 <sup>17</sup>                                   |
| DSX1HS 60C U       | House-side shield for P8, P9, P10, P11 and P12 <sup>17</sup>                    |
| PUMBA DDBXD U*     | Square and round pole universal mounting bracket (specify finish) <sup>20</sup> |
| KMA8 DDBXD U       | Mast arm mounting bracket adaptor (specify finish) <sup>6</sup>                 |


For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAIR2. For more information on Light Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits with isolated neutral. See Outdoor Control Technical Guide for details.
- Reference Motion Sensor table on page 4.
- Reference controls options table on page 4 to see functionality.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.


## Options

### EGS - External Glare Shield

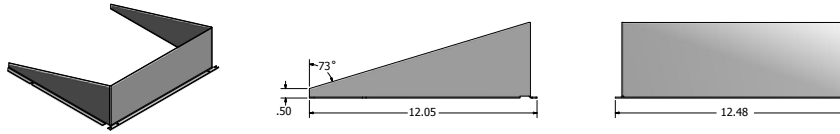

## Drilling

### HANDHOLE ORIENTATION




### Tenon Mounting Slipfitter\*\*

| Tenon O.D. | Mounting | Single Unit | 2 @ 180   | 2 @ 90    | 3 @ 120   | 3 @ 90    | 4 @ 90    |
|------------|----------|-------------|-----------|-----------|-----------|-----------|-----------|
| 2-3/8"     | SPA/RPA  | AS3-5 190   | AS3-5 280 | AS3-5 290 | AS3-5 320 | AS3-5 390 | AS3-5 490 |
|            | SPUMBA   | AS3-5 190   | AS3-5 280 | AS4-5 290 | AS3-5 320 | AS4-5 390 | AS4-5 490 |
|            | RUPUMBA  | AS3-5 190   | AS3-5 280 |           | AS3-5 320 |           |           |
| 2-7/8"     | SPA/RPA  | AST25-190   | AST25-280 | AST25-290 | AST25-320 | AST25-390 | AST25-490 |
|            | SPUMBA   | AST25-190   | AST25-280 |           | AST25-320 |           |           |
|            | RUPUMBA  | AST25-190   | AST25-280 |           | AST25-320 |           |           |
| 4"         | SPA/RPA  | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | SPUMBA   | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | RUPUMBA  | AST35-190   | AST35-280 |           | AST35-320 |           |           |

Template #8

Top of Pole

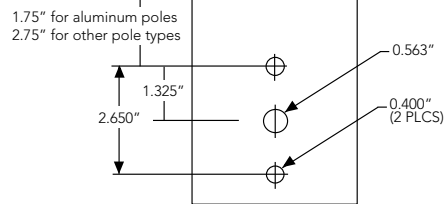


| Mounting Option    | Drilling Template | Single | 2 @ 180    | 2 @ 90     | 3 @ 90        | 3 @ 120         | 4 @ 90           |
|--------------------|-------------------|--------|------------|------------|---------------|-----------------|------------------|
| Head Location      |                   | Side B | Side B & D | Side B & C | Side B, C & D | Round Pole Only | Side A, B, C & D |
| Drill Nomenclature | #8                | DM19AS | DM28AS     | DM29AS     | DM39AS        | DM32AS          | DM49AS           |

|        | Drilling Template | Minimum Acceptable Outside Pole Dimension |        |      |      |      |      |
|--------|-------------------|---|--------|------|------|------|------|
| SPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| RPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| SPUMBA | #5                | 2-7/8"                                    | 3"     | 4"   | 4"   | 3.5" | 4"   |
| RPUMBA | #5                | 2-7/8"                                    | 3.5"   | 5"   | 5"   | 3.5" | 5"   |

# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

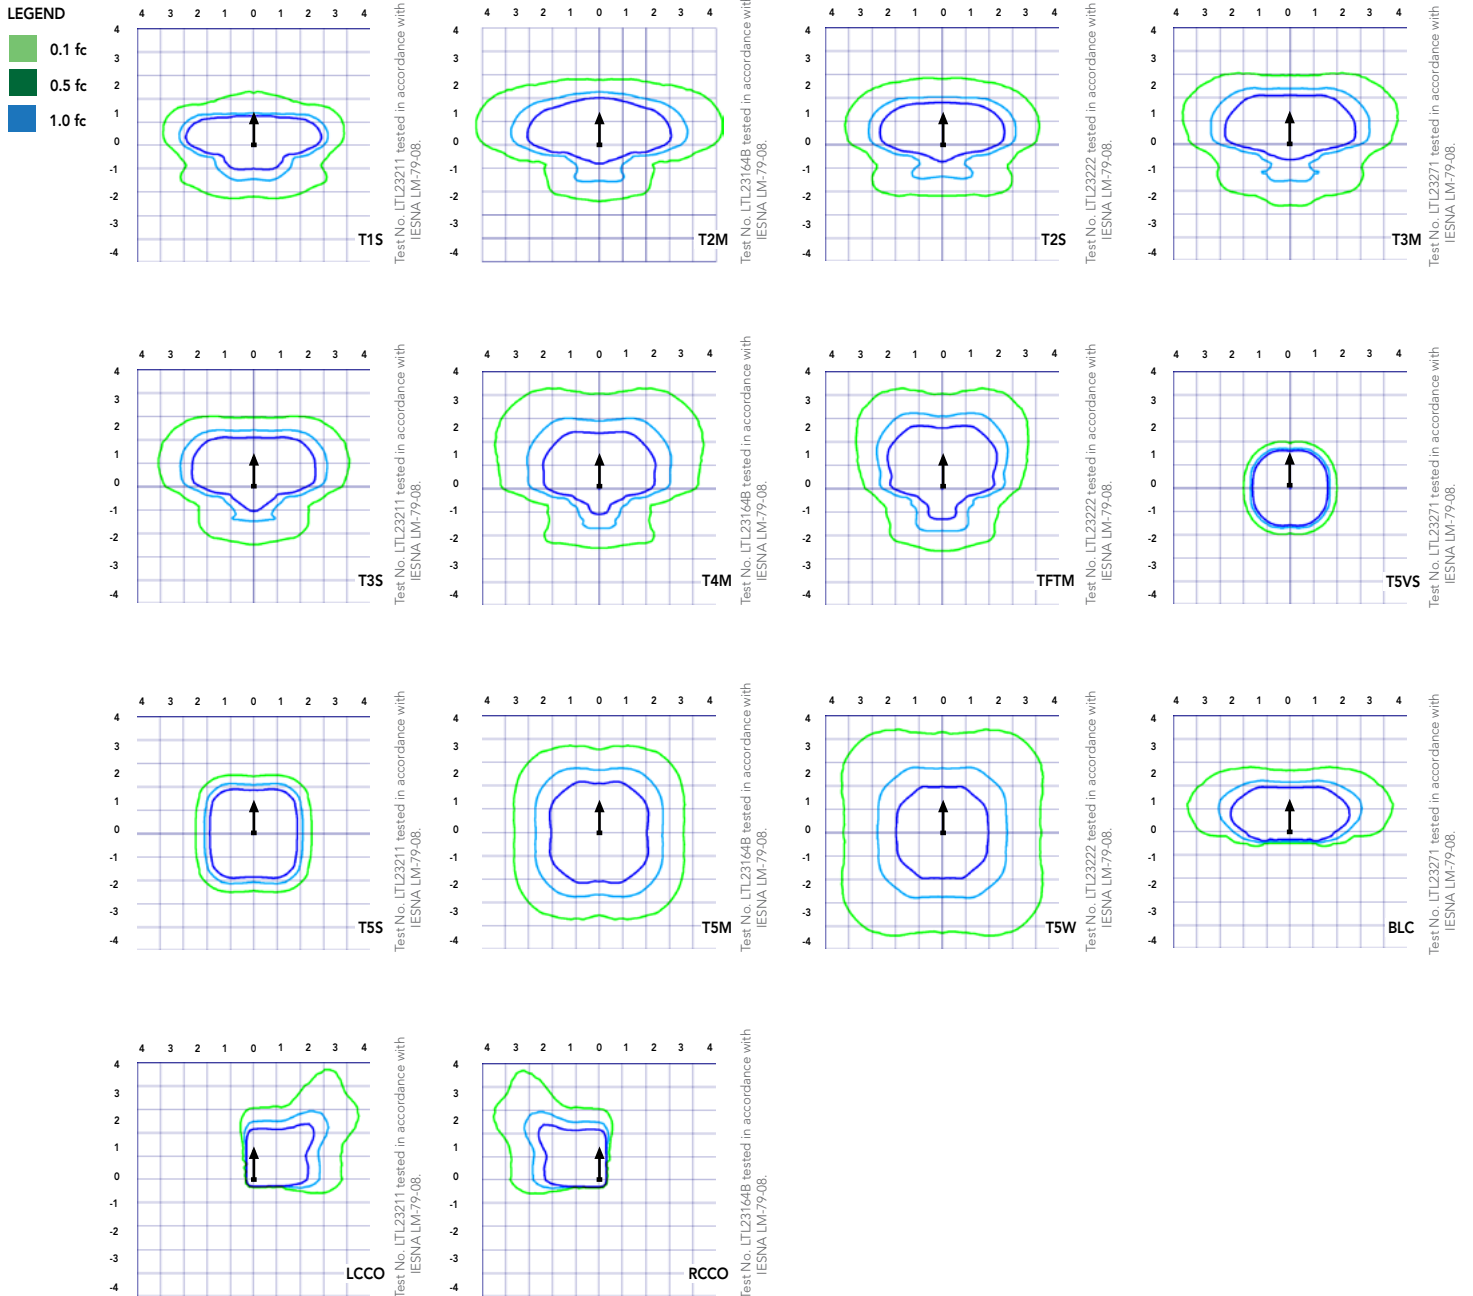



## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.04             |
| 5°C         | 41°F        | 1.04             |
| 10°C        | 50°F        | 1.03             |
| 15°C        | 59°F        | 1.02             |
| 20°C        | 68°F        | 1.01             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 0.99             |
| 35°C        | 95°F        | 0.98             |
| 40°C        | 104°F       | 0.97             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | Lumen Maintenance Factor |
|-----------------|--------------------------|
| 0               | 1.00                     |
| 25,000          | 0.96                     |
| 50,000          | 0.92                     |
| 100,000         | 0.85                     |

#### Motion Sensor Default Settings

| Option                 | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|------------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| PIR or PIRH            | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| *PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use when motion sensor is used as dusk to dawn control.

### Electrical Load

|                                      | Performance Package | LED Count | Drive Current | Wattage | Current (A) |      |      |      |      |      |
|--------------------------------------|---------------------|-----------|---------------|---------|-------------|------|------|------|------|------|
|                                      |                     |           |               |         | 120         | 208  | 240  | 277  | 347  | 480  |
| Forward Optics (Non-Rotated)         | P1                  | 30        | 530           | 54      | 0.45        | 0.26 | 0.23 | 0.19 | 0.10 | 0.12 |
|                                      | P2                  | 30        | 700           | 70      | 0.59        | 0.34 | 0.30 | 0.25 | 0.20 | 0.16 |
|                                      | P3                  | 30        | 1050          | 102     | 0.86        | 0.50 | 0.44 | 0.38 | 0.30 | 0.22 |
|                                      | P4                  | 30        | 1250          | 125     | 1.06        | 0.60 | 0.52 | 0.46 | 0.37 | 0.27 |
|                                      | P5                  | 30        | 1400          | 138     | 1.16        | 0.67 | 0.58 | 0.51 | 0.40 | 0.29 |
|                                      | P6                  | 40        | 1250          | 163     | 1.36        | 0.78 | 0.68 | 0.59 | 0.47 | 0.34 |
|                                      | P7                  | 40        | 1400          | 183     | 1.53        | 0.88 | 0.76 | 0.66 | 0.53 | 0.38 |
|                                      | P8                  | 60        | 1050          | 207     | 1.74        | 0.98 | 0.87 | 0.76 | 0.64 | 0.49 |
|                                      | P9                  | 60        | 1250          | 241     | 2.01        | 1.16 | 1.01 | 0.89 | 0.70 | 0.51 |
| Rotated Optics (Requires L90 or R90) | P10                 | 60        | 530           | 106     | 0.90        | 0.52 | 0.47 | 0.43 | 0.33 | 0.27 |
|                                      | P11                 | 60        | 700           | 137     | 1.15        | 0.67 | 0.60 | 0.53 | 0.42 | 0.32 |
|                                      | P12                 | 60        | 1050          | 207     | 1.74        | 0.99 | 0.87 | 0.76 | 0.60 | 0.46 |
|                                      | P13                 | 60        | 1250          | 231     | 1.93        | 1.12 | 0.97 | 0.86 | 0.67 | 0.49 |

#### Controls Options

| Nomenclature  | Description   | Functionality   | Primary control device  | Notes  |
|---------------|---|---|---|--|
| FA0           | Field adjustable output device installed inside the luminaire; wired to the driver dimming leads. | Allows the luminaire to be manually dimmed, effectively trimming the light output.  | FA0 device  | Cannot be used with other controls options that need the 0-10V leads                                 |
| DS            | Drivers wired independently for 50/50 luminaire operation   | The luminaire is wired to two separate circuits, allowing for 50/50 operation.  | Independently wired drivers   | Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative. |
| PERS or PER7  | Twist-lock photocell receptacle   | Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.              | Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM. | Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire                        |
| PIR or PIRH   | Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting          | Luminaires dim when no occupancy is detected.   | Acuity Controls SBOR  | Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.          |
| NLTAIR2 PIRHN | nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.            | Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse. | nLight Air rSDGR  | nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.    |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 30             | 530           | P1            | 54W          | T1S        | 6,457                | 2 | 0 | 2 | 120 | 6,956                | 2 | 0 | 2 | 129 | 7,044                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2S        | 6,450                | 2 | 0 | 2 | 119 | 6,949                | 2 | 0 | 2 | 129 | 7,037                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2M        | 6,483                | 1 | 0 | 1 | 120 | 6,984                | 2 | 0 | 2 | 129 | 7,073                | 2 | 0 | 2 | 131 |
|                |               |               |              | T3S        | 6,279                | 2 | 0 | 2 | 116 | 6,764                | 2 | 0 | 2 | 125 | 6,850                | 2 | 0 | 2 | 127 |
|                |               |               |              | T3M        | 6,468                | 1 | 0 | 2 | 120 | 6,967                | 1 | 0 | 2 | 129 | 7,056                | 1 | 0 | 2 | 131 |
|                |               |               |              | T4M        | 6,327                | 1 | 0 | 2 | 117 | 6,816                | 1 | 0 | 2 | 126 | 6,902                | 1 | 0 | 2 | 128 |
|                |               |               |              | TFTM       | 6,464                | 1 | 0 | 2 | 120 | 6,963                | 1 | 0 | 2 | 129 | 7,051                | 1 | 0 | 2 | 131 |
|                |               |               |              | TSVS       | 6,722                | 2 | 0 | 0 | 124 | 7,242                | 3 | 0 | 0 | 134 | 7,334                | 3 | 0 | 0 | 136 |
|                |               |               |              | T5S        | 6,728                | 2 | 0 | 1 | 125 | 7,248                | 2 | 0 | 1 | 134 | 7,340                | 2 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 6,711                | 3 | 0 | 1 | 124 | 7,229                | 3 | 0 | 1 | 134 | 7,321                | 3 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 6,667                | 3 | 0 | 2 | 123 | 7,182                | 3 | 0 | 2 | 133 | 7,273                | 3 | 0 | 2 | 135 |
|                |               |               |              | BLC        | 5,299                | 1 | 0 | 1 | 98  | 5,709                | 1 | 0 | 2 | 106 | 5,781                | 1 | 0 | 2 | 107 |
|                |               |               |              | LCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
|                |               |               |              | RCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
| 30             | 700           | P2            | 70W          | T1S        | 8,249                | 2 | 0 | 2 | 118 | 8,886                | 2 | 0 | 2 | 127 | 8,999                | 2 | 0 | 2 | 129 |
|                |               |               |              | T2S        | 8,240                | 2 | 0 | 2 | 118 | 8,877                | 2 | 0 | 2 | 127 | 8,989                | 2 | 0 | 2 | 128 |
|                |               |               |              | T2M        | 8,283                | 2 | 0 | 2 | 118 | 8,923                | 2 | 0 | 2 | 127 | 9,036                | 2 | 0 | 2 | 129 |
|                |               |               |              | T3S        | 8,021                | 2 | 0 | 2 | 115 | 8,641                | 2 | 0 | 2 | 123 | 8,751                | 2 | 0 | 2 | 125 |
|                |               |               |              | T3M        | 8,263                | 2 | 0 | 2 | 118 | 8,901                | 2 | 0 | 2 | 127 | 9,014                | 2 | 0 | 2 | 129 |
|                |               |               |              | T4M        | 8,083                | 2 | 0 | 2 | 115 | 8,708                | 2 | 0 | 2 | 124 | 8,818                | 2 | 0 | 2 | 126 |
|                |               |               |              | TFTM       | 8,257                | 2 | 0 | 2 | 118 | 8,896                | 2 | 0 | 2 | 127 | 9,008                | 2 | 0 | 2 | 129 |
|                |               |               |              | TSVS       | 8,588                | 3 | 0 | 0 | 123 | 9,252                | 3 | 0 | 0 | 132 | 9,369                | 3 | 0 | 0 | 134 |
|                |               |               |              | T5S        | 8,595                | 3 | 0 | 1 | 123 | 9,259                | 3 | 0 | 1 | 132 | 9,376                | 3 | 0 | 1 | 134 |
|                |               |               |              | T5M        | 8,573                | 3 | 0 | 2 | 122 | 9,236                | 3 | 0 | 2 | 132 | 9,353                | 3 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 8,517                | 3 | 0 | 2 | 122 | 9,175                | 4 | 0 | 2 | 131 | 9,291                | 4 | 0 | 2 | 133 |
|                |               |               |              | BLC        | 6,770                | 1 | 0 | 2 | 97  | 7,293                | 1 | 0 | 2 | 104 | 7,386                | 1 | 0 | 2 | 106 |
|                |               |               |              | LCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
|                |               |               |              | RCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
| 30             | 1050          | P3            | 102W         | T1S        | 11,661               | 2 | 0 | 2 | 114 | 12,562               | 3 | 0 | 3 | 123 | 12,721               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2S        | 11,648               | 2 | 0 | 2 | 114 | 12,548               | 3 | 0 | 3 | 123 | 12,707               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2M        | 11,708               | 2 | 0 | 2 | 115 | 12,613               | 2 | 0 | 2 | 124 | 12,773               | 2 | 0 | 2 | 125 |
|                |               |               |              | T3S        | 11,339               | 2 | 0 | 2 | 111 | 12,215               | 3 | 0 | 3 | 120 | 12,370               | 3 | 0 | 3 | 121 |
|                |               |               |              | T3M        | 11,680               | 2 | 0 | 2 | 115 | 12,582               | 2 | 0 | 2 | 123 | 12,742               | 2 | 0 | 2 | 125 |
|                |               |               |              | T4M        | 11,426               | 2 | 0 | 3 | 112 | 12,309               | 2 | 0 | 3 | 121 | 12,465               | 2 | 0 | 3 | 122 |
|                |               |               |              | TFTM       | 11,673               | 2 | 0 | 2 | 114 | 12,575               | 2 | 0 | 3 | 123 | 12,734               | 2 | 0 | 3 | 125 |
|                |               |               |              | TSVS       | 12,140               | 3 | 0 | 1 | 119 | 13,078               | 3 | 0 | 1 | 128 | 13,244               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5S        | 12,150               | 3 | 0 | 1 | 119 | 13,089               | 3 | 0 | 1 | 128 | 13,254               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5M        | 12,119               | 4 | 0 | 2 | 119 | 13,056               | 4 | 0 | 2 | 128 | 13,221               | 4 | 0 | 2 | 130 |
|                |               |               |              | TSW        | 12,040               | 4 | 0 | 3 | 118 | 12,970               | 4 | 0 | 3 | 127 | 13,134               | 4 | 0 | 3 | 129 |
|                |               |               |              | BLC        | 9,570                | 1 | 0 | 2 | 94  | 10,310               | 1 | 0 | 2 | 101 | 10,440               | 1 | 0 | 2 | 102 |
|                |               |               |              | LCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
|                |               |               |              | RCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
| 30             | 1250          | P4            | 125W         | T1S        | 13,435               | 3 | 0 | 3 | 107 | 14,473               | 3 | 0 | 3 | 116 | 14,657               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2S        | 13,421               | 3 | 0 | 3 | 107 | 14,458               | 3 | 0 | 3 | 116 | 14,641               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2M        | 13,490               | 2 | 0 | 2 | 108 | 14,532               | 3 | 0 | 3 | 116 | 14,716               | 3 | 0 | 3 | 118 |
|                |               |               |              | T3S        | 13,064               | 3 | 0 | 3 | 105 | 14,074               | 3 | 0 | 3 | 113 | 14,252               | 3 | 0 | 3 | 114 |
|                |               |               |              | T3M        | 13,457               | 2 | 0 | 2 | 108 | 14,497               | 2 | 0 | 2 | 116 | 14,681               | 2 | 0 | 2 | 117 |
|                |               |               |              | T4M        | 13,165               | 2 | 0 | 3 | 105 | 14,182               | 2 | 0 | 3 | 113 | 14,362               | 2 | 0 | 3 | 115 |
|                |               |               |              | TFTM       | 13,449               | 2 | 0 | 3 | 108 | 14,488               | 2 | 0 | 3 | 116 | 14,672               | 2 | 0 | 3 | 117 |
|                |               |               |              | TSVS       | 13,987               | 4 | 0 | 1 | 112 | 15,068               | 4 | 0 | 1 | 121 | 15,259               | 4 | 0 | 1 | 122 |
|                |               |               |              | T5S        | 13,999               | 3 | 0 | 1 | 112 | 15,080               | 3 | 0 | 1 | 121 | 15,271               | 3 | 0 | 1 | 122 |
|                |               |               |              | T5M        | 13,963               | 4 | 0 | 2 | 112 | 15,042               | 4 | 0 | 2 | 120 | 15,233               | 4 | 0 | 2 | 122 |
|                |               |               |              | TSW        | 13,872               | 4 | 0 | 3 | 111 | 14,944               | 4 | 0 | 3 | 120 | 15,133               | 4 | 0 | 3 | 121 |
|                |               |               |              | BLC        | 11,027               | 1 | 0 | 2 | 88  | 11,879               | 1 | 0 | 2 | 95  | 12,029               | 1 | 0 | 2 | 96  |
|                |               |               |              | LCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
| 30             | 1400          | P5            | 138W         | T1S        | 14,679               | 3 | 0 | 3 | 106 | 15,814               | 3 | 0 | 3 | 115 | 16,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 14,664               | 3 | 0 | 3 | 106 | 15,797               | 3 | 0 | 3 | 114 | 15,997               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2M        | 14,739               | 3 | 0 | 3 | 107 | 15,878               | 3 | 0 | 3 | 115 | 16,079               | 3 | 0 | 3 | 117 |
|                |               |               |              | T3S        | 14,274               | 3 | 0 | 3 | 103 | 15,377               | 3 | 0 | 3 | 111 | 15,572               | 3 | 0 | 3 | 113 |
|                |               |               |              | T3M        | 14,704               | 2 | 0 | 3 | 107 | 15,840               | 3 | 0 | 3 | 115 | 16,040               | 3 | 0 | 3 | 116 |
|                |               |               |              | T4M        | 14,384               | 2 | 0 | 3 | 104 | 15,496               | 3 | 0 | 3 | 112 | 15,692               | 3 | 0 | 3 | 114 |
|                |               |               |              | TFTM       | 14,695               | 2 | 0 | 3 | 106 | 15,830               | 3 | 0 | 3 | 115 | 16,030               | 3 | 0 | 3 | 116 |
|                |               |               |              | TSVS       | 15,283               | 4 | 0 | 1 | 111 | 16,464               | 4 | 0 | 1 | 119 | 16,672               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 15,295               | 3 | 0 | 1 | 111 | 16,477               | 4 | 0 | 1 | 119 | 16,686               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5M        | 15,257               | 4 | 0 | 2 | 111 | 16,435               | 4 | 0 | 2 | 119 | 16,644               | 4 | 0 | 2 | 121 |
|                |               |               |              | TSW        | 15,157               | 4 | 0 | 3 | 110 | 16,328               | 4 | 0 | 3 | 118 | 16,534               | 4 | 0 | 3 | 120 |
|                |               |               |              | BLC        | 12,048               | 1 | 0 | 2 | 87  | 12,979               | 1 | 0 | 2 | 94  | 13,143               | 1 | 0 | 2 | 95  |
|                |               |               |              | LCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |
|                |               |               |              | RCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 40             | 1250          | P6            | 163W         | T1S        | 17,654               | 3 | 0 | 3 | 108 | 19,018               | 3 | 0 | 3 | 117 | 19,259               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2S        | 17,635               | 3 | 0 | 3 | 108 | 18,998               | 3 | 0 | 3 | 117 | 19,238               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2M        | 17,726               | 3 | 0 | 3 | 109 | 19,096               | 3 | 0 | 3 | 117 | 19,337               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 17,167               | 3 | 0 | 3 | 105 | 18,493               | 3 | 0 | 3 | 113 | 18,727               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3M        | 17,683               | 3 | 0 | 3 | 108 | 19,049               | 3 | 0 | 3 | 117 | 19,290               | 3 | 0 | 3 | 118 |
|                |               |               |              | T4M        | 17,299               | 3 | 0 | 3 | 106 | 18,635               | 3 | 0 | 4 | 114 | 18,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 17,672               | 3 | 0 | 3 | 108 | 19,038               | 3 | 0 | 4 | 117 | 19,279               | 3 | 0 | 4 | 118 |
|                |               |               |              | TSVS       | 18,379               | 4 | 0 | 1 | 113 | 19,800               | 4 | 0 | 1 | 121 | 20,050               | 4 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 18,394               | 4 | 0 | 2 | 113 | 19,816               | 4 | 0 | 2 | 122 | 20,066               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 18,348               | 4 | 0 | 2 | 113 | 19,766               | 4 | 0 | 2 | 121 | 20,016               | 4 | 0 | 2 | 123 |
|                |               |               |              | TSW        | 18,228               | 5 | 0 | 3 | 112 | 19,636               | 5 | 0 | 3 | 120 | 19,885               | 5 | 0 | 3 | 122 |
|                |               |               |              | BLC        | 14,489               | 2 | 0 | 2 | 89  | 15,609               | 2 | 0 | 3 | 96  | 15,806               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
| 40             | 1400          | P7            | 183W         | T1S        | 19,227               | 3 | 0 | 3 | 105 | 20,712               | 3 | 0 | 3 | 113 | 20,975               | 3 | 0 | 3 | 115 |
|                |               |               |              | T2S        | 19,206               | 3 | 0 | 3 | 105 | 20,690               | 3 | 0 | 3 | 113 | 20,952               | 3 | 0 | 3 | 114 |
|                |               |               |              | T2M        | 19,305               | 3 | 0 | 3 | 105 | 20,797               | 3 | 0 | 3 | 114 | 21,060               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3S        | 18,696               | 3 | 0 | 3 | 102 | 20,141               | 3 | 0 | 3 | 110 | 20,396               | 3 | 0 | 4 | 111 |
|                |               |               |              | T3M        | 19,258               | 3 | 0 | 3 | 105 | 20,746               | 3 | 0 | 3 | 113 | 21,009               | 3 | 0 | 3 | 115 |
|                |               |               |              | T4M        | 18,840               | 3 | 0 | 4 | 103 | 20,296               | 3 | 0 | 4 | 111 | 20,553               | 3 | 0 | 4 | 112 |
|                |               |               |              | TFTM       | 19,246               | 3 | 0 | 4 | 105 | 20,734               | 3 | 0 | 4 | 113 | 20,996               | 3 | 0 | 4 | 115 |
|                |               |               |              | TSVS       | 20,017               | 4 | 0 | 1 | 109 | 21,564               | 4 | 0 | 1 | 118 | 21,837               | 4 | 0 | 1 | 119 |
|                |               |               |              | T5S        | 20,033               | 4 | 0 | 2 | 109 | 21,581               | 4 | 0 | 2 | 118 | 21,854               | 4 | 0 | 2 | 119 |
|                |               |               |              | T5M        | 19,983               | 4 | 0 | 2 | 109 | 21,527               | 5 | 0 | 3 | 118 | 21,799               | 5 | 0 | 3 | 119 |
|                |               |               |              | TSW        | 19,852               | 5 | 0 | 3 | 108 | 21,386               | 5 | 0 | 3 | 117 | 21,656               | 5 | 0 | 3 | 118 |
|                |               |               |              | BLC        | 15,780               | 2 | 0 | 3 | 86  | 16,999               | 2 | 0 | 3 | 93  | 17,214               | 2 | 0 | 3 | 94  |
|                |               |               |              | LCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
|                |               |               |              | RCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
| 60             | 1050          | P8            | 207W         | T1S        | 22,490               | 3 | 0 | 3 | 109 | 24,228               | 3 | 0 | 3 | 117 | 24,535               | 3 | 0 | 3 | 119 |
|                |               |               |              | T2S        | 22,466               | 3 | 0 | 4 | 109 | 24,202               | 3 | 0 | 4 | 117 | 24,509               | 3 | 0 | 4 | 118 |
|                |               |               |              | T2M        | 22,582               | 3 | 0 | 3 | 109 | 24,327               | 3 | 0 | 3 | 118 | 24,635               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 21,870               | 3 | 0 | 4 | 106 | 23,560               | 3 | 0 | 4 | 114 | 23,858               | 3 | 0 | 4 | 115 |
|                |               |               |              | T3M        | 22,527               | 3 | 0 | 4 | 109 | 24,268               | 3 | 0 | 4 | 117 | 24,575               | 3 | 0 | 4 | 119 |
|                |               |               |              | T4M        | 22,038               | 3 | 0 | 4 | 106 | 23,741               | 3 | 0 | 4 | 115 | 24,041               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 22,513               | 3 | 0 | 4 | 109 | 24,253               | 3 | 0 | 4 | 117 | 24,560               | 3 | 0 | 4 | 119 |
|                |               |               |              | TSVS       | 23,415               | 5 | 0 | 1 | 113 | 25,224               | 5 | 0 | 1 | 122 | 25,543               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 23,434               | 4 | 0 | 2 | 113 | 25,244               | 4 | 0 | 2 | 122 | 25,564               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,221               | 5 | 0 | 4 | 112 | 25,016               | 5 | 0 | 4 | 121 | 25,332               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 18,458               | 2 | 0 | 3 | 89  | 19,885               | 2 | 0 | 3 | 96  | 20,136               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
| 60             | 1250          | P9            | 241W         | T1S        | 25,575               | 3 | 0 | 3 | 106 | 27,551               | 3 | 0 | 3 | 114 | 27,900               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 25,548               | 3 | 0 | 4 | 106 | 27,522               | 3 | 0 | 4 | 114 | 27,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | T2M        | 25,680               | 3 | 0 | 3 | 107 | 27,664               | 3 | 0 | 3 | 115 | 28,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T3S        | 24,870               | 3 | 0 | 4 | 103 | 26,791               | 3 | 0 | 4 | 111 | 27,130               | 3 | 0 | 4 | 113 |
|                |               |               |              | T3M        | 25,617               | 3 | 0 | 4 | 106 | 27,597               | 3 | 0 | 4 | 115 | 27,946               | 3 | 0 | 4 | 116 |
|                |               |               |              | T4M        | 25,061               | 3 | 0 | 4 | 104 | 26,997               | 3 | 0 | 4 | 112 | 27,339               | 3 | 0 | 4 | 113 |
|                |               |               |              | TFTM       | 25,602               | 3 | 0 | 4 | 106 | 27,580               | 3 | 0 | 4 | 114 | 27,929               | 3 | 0 | 4 | 116 |
|                |               |               |              | TSVS       | 26,626               | 5 | 0 | 1 | 110 | 28,684               | 5 | 0 | 1 | 119 | 29,047               | 5 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 26,648               | 4 | 0 | 2 | 111 | 28,707               | 5 | 0 | 2 | 119 | 29,070               | 5 | 0 | 2 | 121 |
|                |               |               |              | T5M        | 26,581               | 5 | 0 | 3 | 110 | 28,635               | 5 | 0 | 3 | 119 | 28,997               | 5 | 0 | 3 | 120 |
|                |               |               |              | TSW        | 26,406               | 5 | 0 | 4 | 110 | 28,447               | 5 | 0 | 4 | 118 | 28,807               | 5 | 0 | 4 | 120 |
|                |               |               |              | BLC        | 20,990               | 2 | 0 | 3 | 87  | 22,612               | 2 | 0 | 3 | 94  | 22,898               | 2 | 0 | 3 | 95  |
|                |               |               |              | LCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |
|                |               |               |              | RCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Rotated Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 60             | 530           | P10           | 106W         | T1S        | 13,042               | 3 | 0 | 3 | 123 | 14,050               | 3 | 0 | 3 | 133 | 14,228               | 3 | 0 | 3 | 134 |
|                |               |               |              | T2S        | 12,967               | 4 | 0 | 4 | 122 | 13,969               | 4 | 0 | 4 | 132 | 14,146               | 4 | 0 | 4 | 133 |
|                |               |               |              | T2M        | 13,201               | 3 | 0 | 3 | 125 | 14,221               | 3 | 0 | 3 | 134 | 14,401               | 3 | 0 | 3 | 136 |
|                |               |               |              | T3S        | 12,766               | 4 | 0 | 4 | 120 | 13,752               | 4 | 0 | 4 | 130 | 13,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | T3M        | 13,193               | 4 | 0 | 4 | 124 | 14,213               | 4 | 0 | 4 | 134 | 14,393               | 4 | 0 | 4 | 136 |
|                |               |               |              | T4M        | 12,944               | 4 | 0 | 4 | 122 | 13,945               | 4 | 0 | 4 | 132 | 14,121               | 4 | 0 | 4 | 133 |
|                |               |               |              | TFTM       | 13,279               | 4 | 0 | 4 | 125 | 14,305               | 4 | 0 | 4 | 135 | 14,486               | 4 | 0 | 4 | 137 |
|                |               |               |              | TSVS       | 13,372               | 3 | 0 | 1 | 126 | 14,405               | 4 | 0 | 1 | 136 | 14,588               | 4 | 0 | 1 | 138 |
|                |               |               |              | T5S        | 13,260               | 3 | 0 | 1 | 125 | 14,284               | 3 | 0 | 1 | 135 | 14,465               | 3 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 13,256               | 4 | 0 | 2 | 125 | 14,281               | 4 | 0 | 2 | 135 | 14,462               | 4 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 13,137               | 4 | 0 | 3 | 124 | 14,153               | 4 | 0 | 3 | 134 | 14,332               | 4 | 0 | 3 | 135 |
|                |               |               |              | BLC        | 10,906               | 3 | 0 | 3 | 103 | 11,749               | 3 | 0 | 3 | 111 | 11,898               | 3 | 0 | 3 | 112 |
|                |               |               |              | LCCO       | 7,789                | 1 | 0 | 3 | 73  | 8,391                | 1 | 0 | 3 | 79  | 8,497                | 1 | 0 | 3 | 80  |
|                |               |               |              | RCCO       | 7,779                | 4 | 0 | 4 | 73  | 8,380                | 4 | 0 | 4 | 79  | 8,486                | 4 | 0 | 4 | 80  |
| 60             | 700           | P11           | 137W         | T1S        | 16,556               | 3 | 0 | 3 | 121 | 17,835               | 3 | 0 | 3 | 130 | 18,061               | 4 | 0 | 4 | 132 |
|                |               |               |              | T2S        | 16,461               | 4 | 0 | 4 | 120 | 17,733               | 4 | 0 | 4 | 129 | 17,957               | 4 | 0 | 4 | 131 |
|                |               |               |              | T2M        | 16,758               | 4 | 0 | 4 | 122 | 18,053               | 4 | 0 | 4 | 132 | 18,281               | 4 | 0 | 4 | 133 |
|                |               |               |              | T3S        | 16,205               | 4 | 0 | 4 | 118 | 17,457               | 4 | 0 | 4 | 127 | 17,678               | 4 | 0 | 4 | 129 |
|                |               |               |              | T3M        | 16,748               | 4 | 0 | 4 | 122 | 18,042               | 4 | 0 | 4 | 132 | 18,271               | 4 | 0 | 4 | 133 |
|                |               |               |              | T4M        | 16,432               | 4 | 0 | 4 | 120 | 17,702               | 4 | 0 | 4 | 129 | 17,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | TFTM       | 16,857               | 4 | 0 | 4 | 123 | 18,159               | 4 | 0 | 4 | 133 | 18,389               | 4 | 0 | 4 | 134 |
|                |               |               |              | TSVS       | 16,975               | 4 | 0 | 1 | 124 | 18,287               | 4 | 0 | 1 | 133 | 18,518               | 4 | 0 | 1 | 135 |
|                |               |               |              | T5S        | 16,832               | 4 | 0 | 1 | 123 | 18,133               | 4 | 0 | 2 | 132 | 18,362               | 4 | 0 | 2 | 134 |
|                |               |               |              | T5M        | 16,828               | 4 | 0 | 2 | 123 | 18,128               | 4 | 0 | 2 | 132 | 18,358               | 4 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 16,677               | 4 | 0 | 3 | 122 | 17,966               | 5 | 0 | 3 | 131 | 18,193               | 5 | 0 | 3 | 133 |
|                |               |               |              | BLC        | 13,845               | 3 | 0 | 3 | 101 | 14,915               | 3 | 0 | 3 | 109 | 15,103               | 3 | 0 | 3 | 110 |
|                |               |               |              | LCCO       | 9,888                | 1 | 0 | 3 | 72  | 10,652               | 2 | 0 | 3 | 78  | 10,787               | 2 | 0 | 3 | 79  |
|                |               |               |              | RCCO       | 9,875                | 4 | 0 | 4 | 72  | 10,638               | 4 | 0 | 4 | 78  | 10,773               | 4 | 0 | 4 | 79  |
| 60             | 1050          | P12           | 207W         | T1S        | 22,996               | 4 | 0 | 4 | 111 | 24,773               | 4 | 0 | 4 | 120 | 25,087               | 4 | 0 | 4 | 121 |
|                |               |               |              | T2S        | 22,864               | 4 | 0 | 4 | 110 | 24,631               | 5 | 0 | 5 | 119 | 24,943               | 5 | 0 | 5 | 120 |
|                |               |               |              | T2M        | 23,277               | 4 | 0 | 4 | 112 | 25,075               | 4 | 0 | 4 | 121 | 25,393               | 4 | 0 | 4 | 123 |
|                |               |               |              | T3S        | 22,509               | 4 | 0 | 4 | 109 | 24,248               | 5 | 0 | 5 | 117 | 24,555               | 5 | 0 | 5 | 119 |
|                |               |               |              | T3M        | 23,263               | 4 | 0 | 4 | 112 | 25,061               | 4 | 0 | 4 | 121 | 25,378               | 4 | 0 | 4 | 123 |
|                |               |               |              | T4M        | 22,824               | 5 | 0 | 5 | 110 | 24,588               | 5 | 0 | 5 | 119 | 24,899               | 5 | 0 | 5 | 120 |
|                |               |               |              | TFTM       | 23,414               | 5 | 0 | 5 | 113 | 25,223               | 5 | 0 | 5 | 122 | 25,543               | 5 | 0 | 5 | 123 |
|                |               |               |              | TSVS       | 23,579               | 5 | 0 | 1 | 114 | 25,401               | 5 | 0 | 1 | 123 | 25,722               | 5 | 0 | 1 | 124 |
|                |               |               |              | T5S        | 23,380               | 4 | 0 | 2 | 113 | 25,187               | 4 | 0 | 2 | 122 | 25,506               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,165               | 5 | 0 | 4 | 112 | 24,955               | 5 | 0 | 4 | 121 | 25,271               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 19,231               | 4 | 0 | 4 | 93  | 20,717               | 4 | 0 | 4 | 100 | 20,979               | 4 | 0 | 4 | 101 |
|                |               |               |              | LCCO       | 13,734               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,716               | 4 | 0 | 4 | 66  | 14,776               | 4 | 0 | 4 | 71  | 14,963               | 4 | 0 | 4 | 72  |
| 60             | 1250          | P13           | 231W         | T1S        | 25,400               | 4 | 0 | 4 | 110 | 27,363               | 4 | 0 | 4 | 118 | 27,709               | 4 | 0 | 4 | 120 |
|                |               |               |              | T2S        | 25,254               | 5 | 0 | 5 | 109 | 27,205               | 5 | 0 | 5 | 118 | 27,550               | 5 | 0 | 5 | 119 |
|                |               |               |              | T2M        | 25,710               | 4 | 0 | 4 | 111 | 27,696               | 4 | 0 | 4 | 120 | 28,047               | 4 | 0 | 4 | 121 |
|                |               |               |              | T3S        | 24,862               | 5 | 0 | 5 | 108 | 26,783               | 5 | 0 | 5 | 116 | 27,122               | 5 | 0 | 5 | 117 |
|                |               |               |              | T3M        | 25,695               | 5 | 0 | 5 | 111 | 27,680               | 5 | 0 | 5 | 120 | 28,031               | 5 | 0 | 5 | 121 |
|                |               |               |              | T4M        | 25,210               | 5 | 0 | 5 | 109 | 27,158               | 5 | 0 | 5 | 118 | 27,502               | 5 | 0 | 5 | 119 |
|                |               |               |              | TFTM       | 25,861               | 5 | 0 | 5 | 112 | 27,860               | 5 | 0 | 5 | 121 | 28,212               | 5 | 0 | 5 | 122 |
|                |               |               |              | TSVS       | 26,043               | 5 | 0 | 1 | 113 | 28,056               | 5 | 0 | 1 | 121 | 28,411               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 25,824               | 4 | 0 | 2 | 112 | 27,819               | 5 | 0 | 2 | 120 | 28,172               | 5 | 0 | 2 | 122 |
|                |               |               |              | T5M        | 25,818               | 5 | 0 | 3 | 112 | 27,813               | 5 | 0 | 3 | 120 | 28,165               | 5 | 0 | 3 | 122 |
|                |               |               |              | TSW        | 25,586               | 5 | 0 | 4 | 111 | 27,563               | 5 | 0 | 4 | 119 | 27,912               | 5 | 0 | 4 | 121 |
|                |               |               |              | BLC        | 21,241               | 4 | 0 | 4 | 92  | 22,882               | 4 | 0 | 4 | 99  | 23,172               | 4 | 0 | 4 | 100 |
|                |               |               |              | LCCO       | 15,170               | 2 | 0 | 4 | 66  | 16,342               | 2 | 0 | 4 | 71  | 16,549               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 15,150               | 5 | 0 | 5 | 66  | 16,321               | 5 | 0 | 5 | 71  | 16,527               | 5 | 0 | 5 | 72  |

## A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

### LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product.

Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.





# D-Series Size 1 LED Area Luminaire

d#series




|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

|                      |  |
|----------------------|--|
| <b>EPA:</b>          | 1.01 ft <sup>2</sup><br>(0.09 m <sup>2</sup> ) |
| <b>Length:</b>       | 33"<br>(83.8 cm)                               |
| <b>Width:</b>        | 13"<br>(33.0 cm)                               |
| <b>Height H1:</b>    | 7-1/2"<br>(19.0 cm)                            |
| <b>Height H2:</b>    | 3-1/2"   |
| <b>Weight (max):</b> | 27 lbs<br>(12.2 kg)                            |

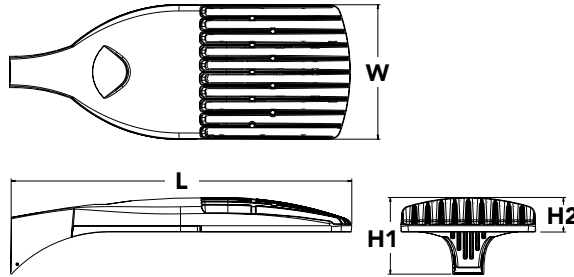

## Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

A+ Capable options indicated by this color background.

## Ordering Information

**EXAMPLE:** DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

| DSX1 LED        |                       | Color temperature |               | Distribution |                      | Voltage | Mounting                         |                           |   |
|-----------------|-----------------------|-------------------|---------------|--------------|----------------------|---------|----------------------------------|---------------------------|---|
| Series          | LEDs                  |                   |               |              |                      |         |                                  |                           |   |
| <b>DSX1 LED</b> | <b>Forward optics</b> | 30K               | 3000 K        | T1S          | Type I short         | T5VS    | Type V very short                | <b>MVOLT</b> <sup>3</sup> | <b>Shipped included</b>   |
|                 | P1                    | 40K               | 4000 K        | T2S          | Type II short        | T5S     | Type V short                     | 120 <sup>4</sup>          | SPA   |
|                 | P2                    | <b>50K</b>        | <b>5000 K</b> | T2M          | Type II medium       | T5M     | Type V medium                    | 208 <sup>4</sup>          | RPA   |
|                 | P3                    |                   |               | T3S          | Type III short       | T5W     | Type V wide                      | 240 <sup>4</sup>          | <b>WBA</b>  |
|                 |                       |                   |               | T3M          | Type III medium      | BLC     | Backlight control <sup>2</sup>   | 277 <sup>4</sup>          | SPUMBA  |
|                 | <b>Rotated optics</b> |                   |               | T4M          | Type IV medium       | LCCO    | Left corner cutoff <sup>2</sup>  | 347 <sup>4,5</sup>        | RPUMBA  |
|                 | P10 <sup>1</sup>      |                   |               | <b>TFTM</b>  | Forward throw medium | RCCO    | Right corner cutoff <sup>2</sup> | 480 <sup>4,5</sup>        | <b>Shipped separately</b>                                       |
|                 | P11 <sup>1</sup>      |                   |               |              |                      |         |                                  |                           | KMA8 DDBXD U  |
|                 | P12 <sup>1</sup>      |                   |               |              |                      |         |                                  |                           | Mast arm mounting bracket adaptor (specify finish) <sup>7</sup> |
|                 | P13 <sup>1</sup>      |                   |               |              |                      |         |                                  |                           |   |

| Control options   | Other options                                | Finish (required)                |
|---|--|----------------------------------|
| <b>Shipped installed</b>  | <b>Shipped installed</b>                     | DDBXD Dark bronze                |
| NLTAIR2 nLight AIR generation 2 enabled <sup>8</sup>  | HS House-side shield <sup>17</sup>           | DBLXD Black                      |
| PIRHN Network, high/low motion/ambient sensor <sup>9</sup>  | SF Single fuse (120, 277, 347V) <sup>4</sup> | DNAXD Natural aluminum           |
| PER NEMA twist-lock receptacle only (controls ordered separate) <sup>10</sup>                                       | DF Double fuse (208, 240, 480V) <sup>4</sup> | DWHXD White                      |
| PER5 Five-pin receptacle only (controls ordered separate) <sup>10,11</sup>  | L90 Left rotated optics <sup>1</sup>         | DBBTD Textured dark bronze       |
| PER7 Seven-pin receptacle only (controls ordered separate) <sup>10,11</sup>   | R90 Right rotated optics <sup>1</sup>        | DBLBXD Textured black            |
| DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>12</sup> | <b>Shipped separately</b>                    | DNATXD Textured natural aluminum |
| DS Dual switching <sup>12,13,14</sup>   | BS Bird spikes <sup>18</sup>                 | DWHGXD Textured white            |
|   | EGS External glare shield <sup>18</sup>      |                                  |
| PIR High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup>          |  |                                  |
| PIRH High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup>        |  |                                  |
| PIR1FC3V High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup>     |  |                                  |
| PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup>   |  |                                  |
| FAO Field adjustable output <sup>14</sup>   |  |                                  |



## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photocell - SSL twist-lock (120-277V) <sup>19</sup>                             |
| DLL347F 1.5 CUL JU | Photocell - SSL twist-lock (347V) <sup>19</sup>                                 |
| DLL480F 1.5 CUL JU | Photocell - SSL twist-lock (480V) <sup>19</sup>                                 |
| DSHORT SBK U       | Shorting cap <sup>19</sup>  |
| DSX1HS 30C U       | House-side shield for P1, P2, P3, P4 and P5 <sup>17</sup>                       |
| DSX1HS 40C U       | House-side shield for P6 and P7 <sup>17</sup>                                   |
| DSX1HS 60C U       | House-side shield for P8, P9, P10, P11 and P12 <sup>17</sup>                    |
| PUMBA DDBXD U*     | Square and round pole universal mounting bracket (specify finish) <sup>20</sup> |
| KMA8 DDBXD U       | Mast arm mounting bracket adaptor (specify finish) <sup>6</sup>                 |


For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAIR2. For more information on Light Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits with isolated neutral. See Outdoor Control Technical Guide for details.
- Reference Motion Sensor table on page 4.
- Reference controls options table on page 4 to see functionality.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.


## Options

### EGS - External Glare Shield

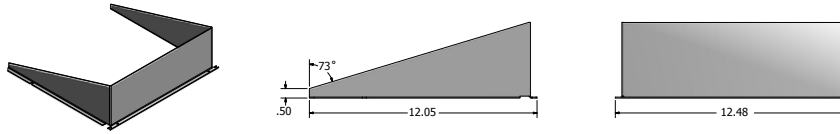

## Drilling

### HANDHOLE ORIENTATION




### Tenon Mounting Slipfitter\*\*

| Tenon O.D. | Mounting | Single Unit | 2 @ 180   | 2 @ 90    | 3 @ 120   | 3 @ 90    | 4 @ 90    |
|------------|----------|-------------|-----------|-----------|-----------|-----------|-----------|
| 2-3/8"     | SPA/RPA  | AS3-5 190   | AS3-5 280 | AS3-5 290 | AS3-5 320 | AS3-5 390 | AS3-5 490 |
|            | SPUMBA   | AS3-5 190   | AS3-5 280 | AS4-5 290 | AS3-5 320 | AS4-5 390 | AS4-5 490 |
|            | RUPUMBA  | AS3-5 190   | AS3-5 280 |           | AS3-5 320 |           |           |
| 2-7/8"     | SPA/RPA  | AST25-190   | AST25-280 | AST25-290 | AST25-320 | AST25-390 | AST25-490 |
|            | SPUMBA   | AST25-190   | AST25-280 |           | AST25-320 |           |           |
|            | RUPUMBA  | AST25-190   | AST25-280 |           | AST25-320 |           |           |
| 4"         | SPA/RPA  | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | SPUMBA   | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | RUPUMBA  | AST35-190   | AST35-280 |           | AST35-320 |           |           |

Template #8

Top of Pole

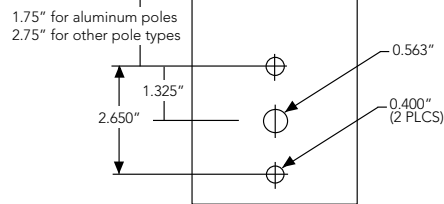

| Mounting Option    | Drilling Template | Single | 2 @ 180    | 2 @ 90     | 3 @ 90        | 3 @ 120         | 4 @ 90           |
|--------------------|-------------------|--------|------------|------------|---------------|-----------------|------------------|
| Head Location      |                   | Side B | Side B & D | Side B & C | Side B, C & D | Round Pole Only | Side A, B, C & D |
| Drill Nomenclature | #8                | DM19AS | DM28AS     | DM29AS     | DM39AS        | DM32AS          | DM49AS           |


|        | Drilling Template | Minimum Acceptable Outside Pole Dimension |        |      |      |      |      |
|--------|-------------------|---|--------|------|------|------|------|
| SPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| RPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| SPUMBA | #5                | 2-7/8"                                    | 3"     | 4"   | 4"   | 3.5" | 4"   |
| RPUMBA | #5                | 2-7/8"                                    | 3.5"   | 5"   | 5"   | 3.5" | 5"   |



# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

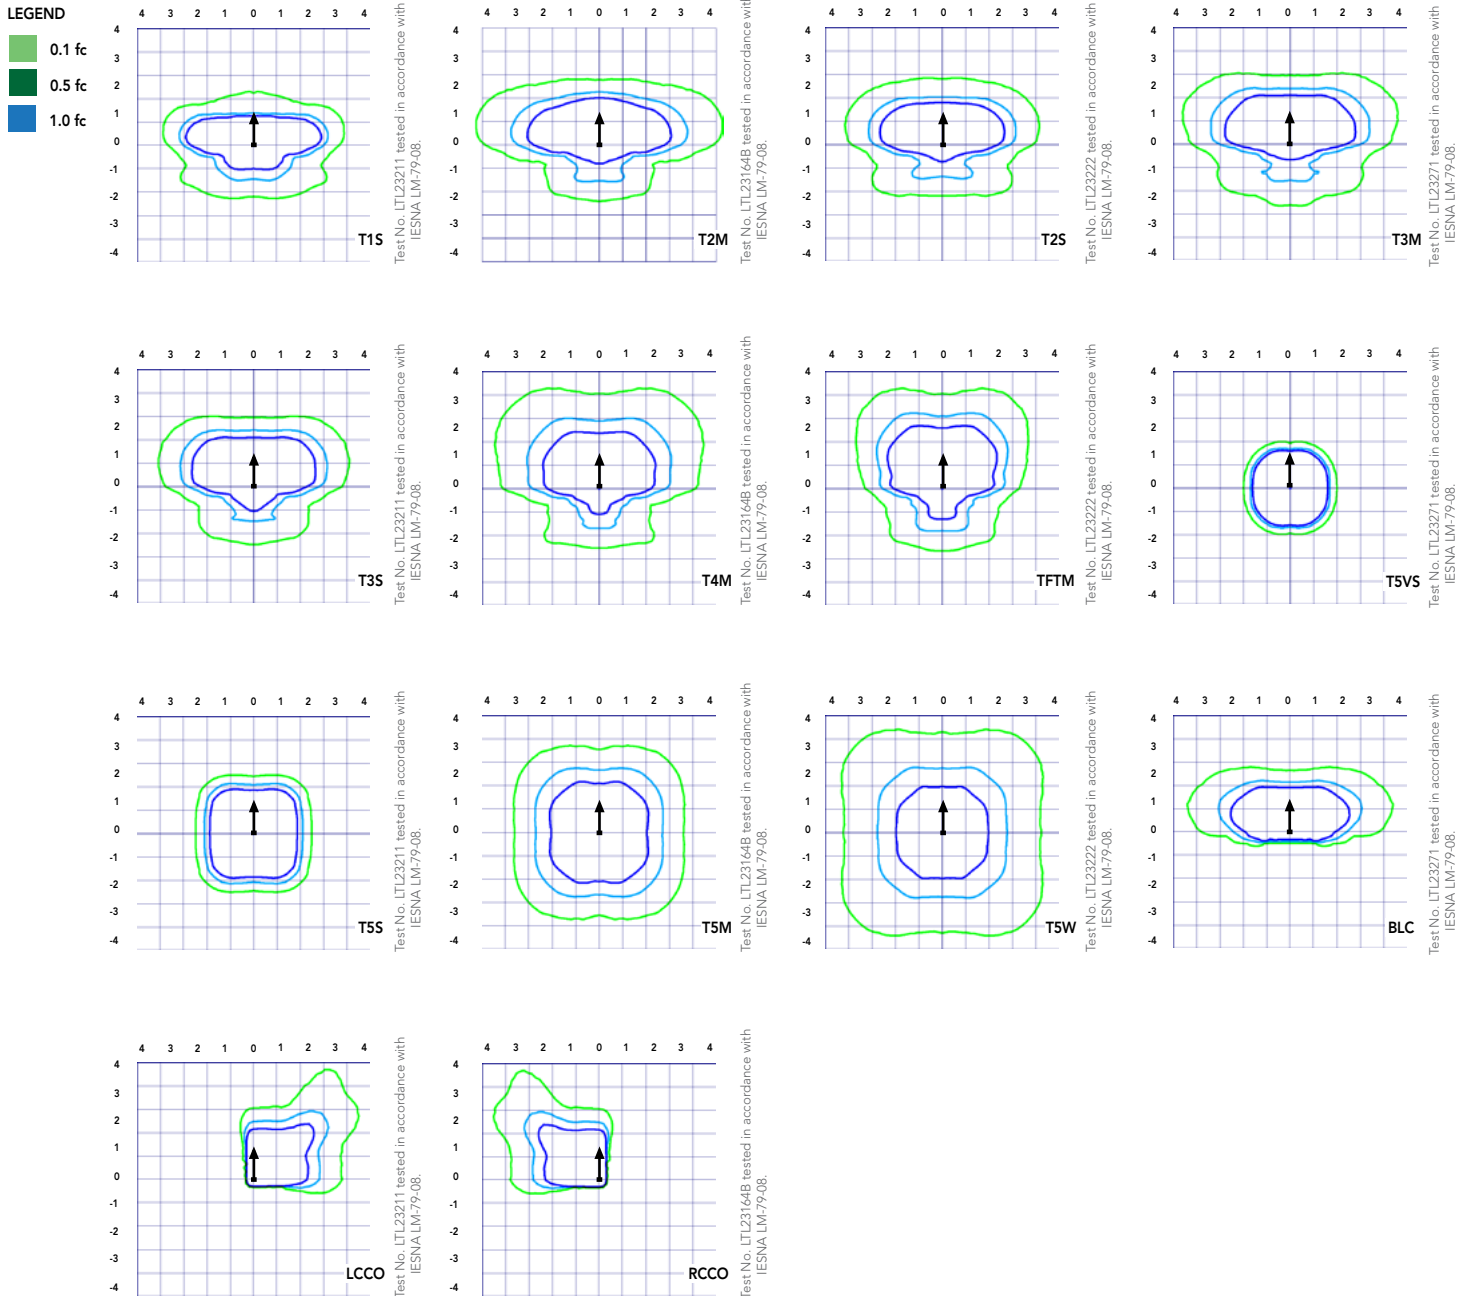

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.04             |
| 5°C         | 41°F        | 1.04             |
| 10°C        | 50°F        | 1.03             |
| 15°C        | 59°F        | 1.02             |
| 20°C        | 68°F        | 1.01             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 0.99             |
| 35°C        | 95°F        | 0.98             |
| 40°C        | 104°F       | 0.97             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | Lumen Maintenance Factor |
|-----------------|--------------------------|
| 0               | 1.00                     |
| 25,000          | 0.96                     |
| 50,000          | 0.92                     |
| 100,000         | 0.85                     |

#### Motion Sensor Default Settings

| Option                 | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|------------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| PIR or PIRH            | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| *PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use when motion sensor is used as dusk to dawn control.

### Electrical Load

|                                      | Performance Package | LED Count | Drive Current | Wattage | Current (A) |      |      |      |      |      |
|--------------------------------------|---------------------|-----------|---------------|---------|-------------|------|------|------|------|------|
|                                      |                     |           |               |         | 120         | 208  | 240  | 277  | 347  | 480  |
| Forward Optics (Non-Rotated)         | P1                  | 30        | 530           | 54      | 0.45        | 0.26 | 0.23 | 0.19 | 0.10 | 0.12 |
|                                      | P2                  | 30        | 700           | 70      | 0.59        | 0.34 | 0.30 | 0.25 | 0.20 | 0.16 |
|                                      | P3                  | 30        | 1050          | 102     | 0.86        | 0.50 | 0.44 | 0.38 | 0.30 | 0.22 |
|                                      | P4                  | 30        | 1250          | 125     | 1.06        | 0.60 | 0.52 | 0.46 | 0.37 | 0.27 |
|                                      | P5                  | 30        | 1400          | 138     | 1.16        | 0.67 | 0.58 | 0.51 | 0.40 | 0.29 |
|                                      | P6                  | 40        | 1250          | 163     | 1.36        | 0.78 | 0.68 | 0.59 | 0.47 | 0.34 |
|                                      | P7                  | 40        | 1400          | 183     | 1.53        | 0.88 | 0.76 | 0.66 | 0.53 | 0.38 |
|                                      | P8                  | 60        | 1050          | 207     | 1.74        | 0.98 | 0.87 | 0.76 | 0.64 | 0.49 |
|                                      | P9                  | 60        | 1250          | 241     | 2.01        | 1.16 | 1.01 | 0.89 | 0.70 | 0.51 |
| Rotated Optics (Requires L90 or R90) | P10                 | 60        | 530           | 106     | 0.90        | 0.52 | 0.47 | 0.43 | 0.33 | 0.27 |
|                                      | P11                 | 60        | 700           | 137     | 1.15        | 0.67 | 0.60 | 0.53 | 0.42 | 0.32 |
|                                      | P12                 | 60        | 1050          | 207     | 1.74        | 0.99 | 0.87 | 0.76 | 0.60 | 0.46 |
|                                      | P13                 | 60        | 1250          | 231     | 1.93        | 1.12 | 0.97 | 0.86 | 0.67 | 0.49 |

#### Controls Options

| Nomenclature  | Description   | Functionality   | Primary control device  | Notes  |
|---------------|---|---|---|--|
| FA0           | Field adjustable output device installed inside the luminaire; wired to the driver dimming leads. | Allows the luminaire to be manually dimmed, effectively trimming the light output.  | FA0 device  | Cannot be used with other controls options that need the 0-10V leads                                 |
| DS            | Drivers wired independently for 50/50 luminaire operation   | The luminaire is wired to two separate circuits, allowing for 50/50 operation.  | Independently wired drivers   | Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative. |
| PERS or PER7  | Twist-lock photocell receptacle   | Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.              | Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM. | Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire                        |
| PIR or PIRH   | Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting          | Luminaires dim when no occupancy is detected.   | Acuity Controls SBOR  | Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.          |
| NLTAIR2 PIRHN | nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.            | Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse. | nLight Air rSDGR  | nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.    |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 30             | 530           | P1            | 54W          | T1S        | 6,457                | 2 | 0 | 2 | 120 | 6,956                | 2 | 0 | 2 | 129 | 7,044                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2S        | 6,450                | 2 | 0 | 2 | 119 | 6,949                | 2 | 0 | 2 | 129 | 7,037                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2M        | 6,483                | 1 | 0 | 1 | 120 | 6,984                | 2 | 0 | 2 | 129 | 7,073                | 2 | 0 | 2 | 131 |
|                |               |               |              | T3S        | 6,279                | 2 | 0 | 2 | 116 | 6,764                | 2 | 0 | 2 | 125 | 6,850                | 2 | 0 | 2 | 127 |
|                |               |               |              | T3M        | 6,468                | 1 | 0 | 2 | 120 | 6,967                | 1 | 0 | 2 | 129 | 7,056                | 1 | 0 | 2 | 131 |
|                |               |               |              | T4M        | 6,327                | 1 | 0 | 2 | 117 | 6,816                | 1 | 0 | 2 | 126 | 6,902                | 1 | 0 | 2 | 128 |
|                |               |               |              | TFTM       | 6,464                | 1 | 0 | 2 | 120 | 6,963                | 1 | 0 | 2 | 129 | 7,051                | 1 | 0 | 2 | 131 |
|                |               |               |              | TSVS       | 6,722                | 2 | 0 | 0 | 124 | 7,242                | 3 | 0 | 0 | 134 | 7,334                | 3 | 0 | 0 | 136 |
|                |               |               |              | T5S        | 6,728                | 2 | 0 | 1 | 125 | 7,248                | 2 | 0 | 1 | 134 | 7,340                | 2 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 6,711                | 3 | 0 | 1 | 124 | 7,229                | 3 | 0 | 1 | 134 | 7,321                | 3 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 6,667                | 3 | 0 | 2 | 123 | 7,182                | 3 | 0 | 2 | 133 | 7,273                | 3 | 0 | 2 | 135 |
|                |               |               |              | BLC        | 5,299                | 1 | 0 | 1 | 98  | 5,709                | 1 | 0 | 2 | 106 | 5,781                | 1 | 0 | 2 | 107 |
|                |               |               |              | LCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
|                |               |               |              | RCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
| 30             | 700           | P2            | 70W          | T1S        | 8,249                | 2 | 0 | 2 | 118 | 8,886                | 2 | 0 | 2 | 127 | 8,999                | 2 | 0 | 2 | 129 |
|                |               |               |              | T2S        | 8,240                | 2 | 0 | 2 | 118 | 8,877                | 2 | 0 | 2 | 127 | 8,989                | 2 | 0 | 2 | 128 |
|                |               |               |              | T2M        | 8,283                | 2 | 0 | 2 | 118 | 8,923                | 2 | 0 | 2 | 127 | 9,036                | 2 | 0 | 2 | 129 |
|                |               |               |              | T3S        | 8,021                | 2 | 0 | 2 | 115 | 8,641                | 2 | 0 | 2 | 123 | 8,751                | 2 | 0 | 2 | 125 |
|                |               |               |              | T3M        | 8,263                | 2 | 0 | 2 | 118 | 8,901                | 2 | 0 | 2 | 127 | 9,014                | 2 | 0 | 2 | 129 |
|                |               |               |              | T4M        | 8,083                | 2 | 0 | 2 | 115 | 8,708                | 2 | 0 | 2 | 124 | 8,818                | 2 | 0 | 2 | 126 |
|                |               |               |              | TFTM       | 8,257                | 2 | 0 | 2 | 118 | 8,896                | 2 | 0 | 2 | 127 | 9,008                | 2 | 0 | 2 | 129 |
|                |               |               |              | TSVS       | 8,588                | 3 | 0 | 0 | 123 | 9,252                | 3 | 0 | 0 | 132 | 9,369                | 3 | 0 | 0 | 134 |
|                |               |               |              | T5S        | 8,595                | 3 | 0 | 1 | 123 | 9,259                | 3 | 0 | 1 | 132 | 9,376                | 3 | 0 | 1 | 134 |
|                |               |               |              | T5M        | 8,573                | 3 | 0 | 2 | 122 | 9,236                | 3 | 0 | 2 | 132 | 9,353                | 3 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 8,517                | 3 | 0 | 2 | 122 | 9,175                | 4 | 0 | 2 | 131 | 9,291                | 4 | 0 | 2 | 133 |
|                |               |               |              | BLC        | 6,770                | 1 | 0 | 2 | 97  | 7,293                | 1 | 0 | 2 | 104 | 7,386                | 1 | 0 | 2 | 106 |
|                |               |               |              | LCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
|                |               |               |              | RCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
| 30             | 1050          | P3            | 102W         | T1S        | 11,661               | 2 | 0 | 2 | 114 | 12,562               | 3 | 0 | 3 | 123 | 12,721               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2S        | 11,648               | 2 | 0 | 2 | 114 | 12,548               | 3 | 0 | 3 | 123 | 12,707               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2M        | 11,708               | 2 | 0 | 2 | 115 | 12,613               | 2 | 0 | 2 | 124 | 12,773               | 2 | 0 | 2 | 125 |
|                |               |               |              | T3S        | 11,339               | 2 | 0 | 2 | 111 | 12,215               | 3 | 0 | 3 | 120 | 12,370               | 3 | 0 | 3 | 121 |
|                |               |               |              | T3M        | 11,680               | 2 | 0 | 2 | 115 | 12,582               | 2 | 0 | 2 | 123 | 12,742               | 2 | 0 | 2 | 125 |
|                |               |               |              | T4M        | 11,426               | 2 | 0 | 3 | 112 | 12,309               | 2 | 0 | 3 | 121 | 12,465               | 2 | 0 | 3 | 122 |
|                |               |               |              | TFTM       | 11,673               | 2 | 0 | 2 | 114 | 12,575               | 2 | 0 | 3 | 123 | 12,734               | 2 | 0 | 3 | 125 |
|                |               |               |              | TSVS       | 12,140               | 3 | 0 | 1 | 119 | 13,078               | 3 | 0 | 1 | 128 | 13,244               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5S        | 12,150               | 3 | 0 | 1 | 119 | 13,089               | 3 | 0 | 1 | 128 | 13,254               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5M        | 12,119               | 4 | 0 | 2 | 119 | 13,056               | 4 | 0 | 2 | 128 | 13,221               | 4 | 0 | 2 | 130 |
|                |               |               |              | TSW        | 12,040               | 4 | 0 | 3 | 118 | 12,970               | 4 | 0 | 3 | 127 | 13,134               | 4 | 0 | 3 | 129 |
|                |               |               |              | BLC        | 9,570                | 1 | 0 | 2 | 94  | 10,310               | 1 | 0 | 2 | 101 | 10,440               | 1 | 0 | 2 | 102 |
|                |               |               |              | LCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
|                |               |               |              | RCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
| 30             | 1250          | P4            | 125W         | T1S        | 13,435               | 3 | 0 | 3 | 107 | 14,473               | 3 | 0 | 3 | 116 | 14,657               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2S        | 13,421               | 3 | 0 | 3 | 107 | 14,458               | 3 | 0 | 3 | 116 | 14,641               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2M        | 13,490               | 2 | 0 | 2 | 108 | 14,532               | 3 | 0 | 3 | 116 | 14,716               | 3 | 0 | 3 | 118 |
|                |               |               |              | T3S        | 13,064               | 3 | 0 | 3 | 105 | 14,074               | 3 | 0 | 3 | 113 | 14,252               | 3 | 0 | 3 | 114 |
|                |               |               |              | T3M        | 13,457               | 2 | 0 | 2 | 108 | 14,497               | 2 | 0 | 2 | 116 | 14,681               | 2 | 0 | 2 | 117 |
|                |               |               |              | T4M        | 13,165               | 2 | 0 | 3 | 105 | 14,182               | 2 | 0 | 3 | 113 | 14,362               | 2 | 0 | 3 | 115 |
|                |               |               |              | TFTM       | 13,449               | 2 | 0 | 3 | 108 | 14,488               | 2 | 0 | 3 | 116 | 14,672               | 2 | 0 | 3 | 117 |
|                |               |               |              | TSVS       | 13,987               | 4 | 0 | 1 | 112 | 15,068               | 4 | 0 | 1 | 121 | 15,259               | 4 | 0 | 1 | 122 |
|                |               |               |              | T5S        | 13,999               | 3 | 0 | 1 | 112 | 15,080               | 3 | 0 | 1 | 121 | 15,271               | 3 | 0 | 1 | 122 |
|                |               |               |              | T5M        | 13,963               | 4 | 0 | 2 | 112 | 15,042               | 4 | 0 | 2 | 120 | 15,233               | 4 | 0 | 2 | 122 |
|                |               |               |              | TSW        | 13,872               | 4 | 0 | 3 | 111 | 14,944               | 4 | 0 | 3 | 120 | 15,133               | 4 | 0 | 3 | 121 |
|                |               |               |              | BLC        | 11,027               | 1 | 0 | 2 | 88  | 11,879               | 1 | 0 | 2 | 95  | 12,029               | 1 | 0 | 2 | 96  |
|                |               |               |              | LCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
| 30             | 1400          | P5            | 138W         | T1S        | 14,679               | 3 | 0 | 3 | 106 | 15,814               | 3 | 0 | 3 | 115 | 16,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 14,664               | 3 | 0 | 3 | 106 | 15,797               | 3 | 0 | 3 | 114 | 15,997               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2M        | 14,739               | 3 | 0 | 3 | 107 | 15,878               | 3 | 0 | 3 | 115 | 16,079               | 3 | 0 | 3 | 117 |
|                |               |               |              | T3S        | 14,274               | 3 | 0 | 3 | 103 | 15,377               | 3 | 0 | 3 | 111 | 15,572               | 3 | 0 | 3 | 113 |
|                |               |               |              | T3M        | 14,704               | 2 | 0 | 3 | 107 | 15,840               | 3 | 0 | 3 | 115 | 16,040               | 3 | 0 | 3 | 116 |
|                |               |               |              | T4M        | 14,384               | 2 | 0 | 3 | 104 | 15,496               | 3 | 0 | 3 | 112 | 15,692               | 3 | 0 | 3 | 114 |
|                |               |               |              | TFTM       | 14,695               | 2 | 0 | 3 | 106 | 15,830               | 3 | 0 | 3 | 115 | 16,030               | 3 | 0 | 3 | 116 |
|                |               |               |              | TSVS       | 15,283               | 4 | 0 | 1 | 111 | 16,464               | 4 | 0 | 1 | 119 | 16,672               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 15,295               | 3 | 0 | 1 | 111 | 16,477               | 4 | 0 | 1 | 119 | 16,686               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5M        | 15,257               | 4 | 0 | 2 | 111 | 16,435               | 4 | 0 | 2 | 119 | 16,644               | 4 | 0 | 2 | 121 |
|                |               |               |              | TSW        | 15,157               | 4 | 0 | 3 | 110 | 16,328               | 4 | 0 | 3 | 118 | 16,534               | 4 | 0 | 3 | 120 |
|                |               |               |              | BLC        | 12,048               | 1 | 0 | 2 | 87  | 12,979               | 1 | 0 | 2 | 94  | 13,143               | 1 | 0 | 2 | 95  |
|                |               |               |              | LCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |
|                |               |               |              | RCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 40             | 1250          | P6            | 163W         | T1S        | 17,654               | 3 | 0 | 3 | 108 | 19,018               | 3 | 0 | 3 | 117 | 19,259               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2S        | 17,635               | 3 | 0 | 3 | 108 | 18,998               | 3 | 0 | 3 | 117 | 19,238               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2M        | 17,726               | 3 | 0 | 3 | 109 | 19,096               | 3 | 0 | 3 | 117 | 19,337               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 17,167               | 3 | 0 | 3 | 105 | 18,493               | 3 | 0 | 3 | 113 | 18,727               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3M        | 17,683               | 3 | 0 | 3 | 108 | 19,049               | 3 | 0 | 3 | 117 | 19,290               | 3 | 0 | 3 | 118 |
|                |               |               |              | T4M        | 17,299               | 3 | 0 | 3 | 106 | 18,635               | 3 | 0 | 4 | 114 | 18,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 17,672               | 3 | 0 | 3 | 108 | 19,038               | 3 | 0 | 4 | 117 | 19,279               | 3 | 0 | 4 | 118 |
|                |               |               |              | TSVS       | 18,379               | 4 | 0 | 1 | 113 | 19,800               | 4 | 0 | 1 | 121 | 20,050               | 4 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 18,394               | 4 | 0 | 2 | 113 | 19,816               | 4 | 0 | 2 | 122 | 20,066               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 18,348               | 4 | 0 | 2 | 113 | 19,766               | 4 | 0 | 2 | 121 | 20,016               | 4 | 0 | 2 | 123 |
|                |               |               |              | TSW        | 18,228               | 5 | 0 | 3 | 112 | 19,636               | 5 | 0 | 3 | 120 | 19,885               | 5 | 0 | 3 | 122 |
|                |               |               |              | BLC        | 14,489               | 2 | 0 | 2 | 89  | 15,609               | 2 | 0 | 3 | 96  | 15,806               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
| 40             | 1400          | P7            | 183W         | T1S        | 19,227               | 3 | 0 | 3 | 105 | 20,712               | 3 | 0 | 3 | 113 | 20,975               | 3 | 0 | 3 | 115 |
|                |               |               |              | T2S        | 19,206               | 3 | 0 | 3 | 105 | 20,690               | 3 | 0 | 3 | 113 | 20,952               | 3 | 0 | 3 | 114 |
|                |               |               |              | T2M        | 19,305               | 3 | 0 | 3 | 105 | 20,797               | 3 | 0 | 3 | 114 | 21,060               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3S        | 18,696               | 3 | 0 | 3 | 102 | 20,141               | 3 | 0 | 3 | 110 | 20,396               | 3 | 0 | 4 | 111 |
|                |               |               |              | T3M        | 19,258               | 3 | 0 | 3 | 105 | 20,746               | 3 | 0 | 3 | 113 | 21,009               | 3 | 0 | 3 | 115 |
|                |               |               |              | T4M        | 18,840               | 3 | 0 | 4 | 103 | 20,296               | 3 | 0 | 4 | 111 | 20,553               | 3 | 0 | 4 | 112 |
|                |               |               |              | TFTM       | 19,246               | 3 | 0 | 4 | 105 | 20,734               | 3 | 0 | 4 | 113 | 20,996               | 3 | 0 | 4 | 115 |
|                |               |               |              | TSVS       | 20,017               | 4 | 0 | 1 | 109 | 21,564               | 4 | 0 | 1 | 118 | 21,837               | 4 | 0 | 1 | 119 |
|                |               |               |              | T5S        | 20,033               | 4 | 0 | 2 | 109 | 21,581               | 4 | 0 | 2 | 118 | 21,854               | 4 | 0 | 2 | 119 |
|                |               |               |              | T5M        | 19,983               | 4 | 0 | 2 | 109 | 21,527               | 5 | 0 | 3 | 118 | 21,799               | 5 | 0 | 3 | 119 |
|                |               |               |              | TSW        | 19,852               | 5 | 0 | 3 | 108 | 21,386               | 5 | 0 | 3 | 117 | 21,656               | 5 | 0 | 3 | 118 |
|                |               |               |              | BLC        | 15,780               | 2 | 0 | 3 | 86  | 16,999               | 2 | 0 | 3 | 93  | 17,214               | 2 | 0 | 3 | 94  |
|                |               |               |              | LCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
|                |               |               |              | RCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
| 60             | 1050          | P8            | 207W         | T1S        | 22,490               | 3 | 0 | 3 | 109 | 24,228               | 3 | 0 | 3 | 117 | 24,535               | 3 | 0 | 3 | 119 |
|                |               |               |              | T2S        | 22,466               | 3 | 0 | 4 | 109 | 24,202               | 3 | 0 | 4 | 117 | 24,509               | 3 | 0 | 4 | 118 |
|                |               |               |              | T2M        | 22,582               | 3 | 0 | 3 | 109 | 24,327               | 3 | 0 | 3 | 118 | 24,635               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 21,870               | 3 | 0 | 4 | 106 | 23,560               | 3 | 0 | 4 | 114 | 23,858               | 3 | 0 | 4 | 115 |
|                |               |               |              | T3M        | 22,527               | 3 | 0 | 4 | 109 | 24,268               | 3 | 0 | 4 | 117 | 24,575               | 3 | 0 | 4 | 119 |
|                |               |               |              | T4M        | 22,038               | 3 | 0 | 4 | 106 | 23,741               | 3 | 0 | 4 | 115 | 24,041               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 22,513               | 3 | 0 | 4 | 109 | 24,253               | 3 | 0 | 4 | 117 | 24,560               | 3 | 0 | 4 | 119 |
|                |               |               |              | TSVS       | 23,415               | 5 | 0 | 1 | 113 | 25,224               | 5 | 0 | 1 | 122 | 25,543               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 23,434               | 4 | 0 | 2 | 113 | 25,244               | 4 | 0 | 2 | 122 | 25,564               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,221               | 5 | 0 | 4 | 112 | 25,016               | 5 | 0 | 4 | 121 | 25,332               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 18,458               | 2 | 0 | 3 | 89  | 19,885               | 2 | 0 | 3 | 96  | 20,136               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
| 60             | 1250          | P9            | 241W         | T1S        | 25,575               | 3 | 0 | 3 | 106 | 27,551               | 3 | 0 | 3 | 114 | 27,900               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 25,548               | 3 | 0 | 4 | 106 | 27,522               | 3 | 0 | 4 | 114 | 27,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | T2M        | 25,680               | 3 | 0 | 3 | 107 | 27,664               | 3 | 0 | 3 | 115 | 28,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T3S        | 24,870               | 3 | 0 | 4 | 103 | 26,791               | 3 | 0 | 4 | 111 | 27,130               | 3 | 0 | 4 | 113 |
|                |               |               |              | T3M        | 25,617               | 3 | 0 | 4 | 106 | 27,597               | 3 | 0 | 4 | 115 | 27,946               | 3 | 0 | 4 | 116 |
|                |               |               |              | T4M        | 25,061               | 3 | 0 | 4 | 104 | 26,997               | 3 | 0 | 4 | 112 | 27,339               | 3 | 0 | 4 | 113 |
|                |               |               |              | TFTM       | 25,602               | 3 | 0 | 4 | 106 | 27,580               | 3 | 0 | 4 | 114 | 27,929               | 3 | 0 | 4 | 116 |
|                |               |               |              | TSVS       | 26,626               | 5 | 0 | 1 | 110 | 28,684               | 5 | 0 | 1 | 119 | 29,047               | 5 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 26,648               | 4 | 0 | 2 | 111 | 28,707               | 5 | 0 | 2 | 119 | 29,070               | 5 | 0 | 2 | 121 |
|                |               |               |              | T5M        | 26,581               | 5 | 0 | 3 | 110 | 28,635               | 5 | 0 | 3 | 119 | 28,997               | 5 | 0 | 3 | 120 |
|                |               |               |              | TSW        | 26,406               | 5 | 0 | 4 | 110 | 28,447               | 5 | 0 | 4 | 118 | 28,807               | 5 | 0 | 4 | 120 |
|                |               |               |              | BLC        | 20,990               | 2 | 0 | 3 | 87  | 22,612               | 2 | 0 | 3 | 94  | 22,898               | 2 | 0 | 3 | 95  |
|                |               |               |              | LCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |
|                |               |               |              | RCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Rotated Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 60             | 530           | P10           | 106W         | T1S        | 13,042               | 3 | 0 | 3 | 123 | 14,050               | 3 | 0 | 3 | 133 | 14,228               | 3 | 0 | 3 | 134 |
|                |               |               |              | T2S        | 12,967               | 4 | 0 | 4 | 122 | 13,969               | 4 | 0 | 4 | 132 | 14,146               | 4 | 0 | 4 | 133 |
|                |               |               |              | T2M        | 13,201               | 3 | 0 | 3 | 125 | 14,221               | 3 | 0 | 3 | 134 | 14,401               | 3 | 0 | 3 | 136 |
|                |               |               |              | T3S        | 12,766               | 4 | 0 | 4 | 120 | 13,752               | 4 | 0 | 4 | 130 | 13,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | T3M        | 13,193               | 4 | 0 | 4 | 124 | 14,213               | 4 | 0 | 4 | 134 | 14,393               | 4 | 0 | 4 | 136 |
|                |               |               |              | T4M        | 12,944               | 4 | 0 | 4 | 122 | 13,945               | 4 | 0 | 4 | 132 | 14,121               | 4 | 0 | 4 | 133 |
|                |               |               |              | TFTM       | 13,279               | 4 | 0 | 4 | 125 | 14,305               | 4 | 0 | 4 | 135 | 14,486               | 4 | 0 | 4 | 137 |
|                |               |               |              | TSVS       | 13,372               | 3 | 0 | 1 | 126 | 14,405               | 4 | 0 | 1 | 136 | 14,588               | 4 | 0 | 1 | 138 |
|                |               |               |              | T5S        | 13,260               | 3 | 0 | 1 | 125 | 14,284               | 3 | 0 | 1 | 135 | 14,465               | 3 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 13,256               | 4 | 0 | 2 | 125 | 14,281               | 4 | 0 | 2 | 135 | 14,462               | 4 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 13,137               | 4 | 0 | 3 | 124 | 14,153               | 4 | 0 | 3 | 134 | 14,332               | 4 | 0 | 3 | 135 |
|                |               |               |              | BLC        | 10,906               | 3 | 0 | 3 | 103 | 11,749               | 3 | 0 | 3 | 111 | 11,898               | 3 | 0 | 3 | 112 |
|                |               |               |              | LCCO       | 7,789                | 1 | 0 | 3 | 73  | 8,391                | 1 | 0 | 3 | 79  | 8,497                | 1 | 0 | 3 | 80  |
|                |               |               |              | RCCO       | 7,779                | 4 | 0 | 4 | 73  | 8,380                | 4 | 0 | 4 | 79  | 8,486                | 4 | 0 | 4 | 80  |
| 60             | 700           | P11           | 137W         | T1S        | 16,556               | 3 | 0 | 3 | 121 | 17,835               | 3 | 0 | 3 | 130 | 18,061               | 4 | 0 | 4 | 132 |
|                |               |               |              | T2S        | 16,461               | 4 | 0 | 4 | 120 | 17,733               | 4 | 0 | 4 | 129 | 17,957               | 4 | 0 | 4 | 131 |
|                |               |               |              | T2M        | 16,758               | 4 | 0 | 4 | 122 | 18,053               | 4 | 0 | 4 | 132 | 18,281               | 4 | 0 | 4 | 133 |
|                |               |               |              | T3S        | 16,205               | 4 | 0 | 4 | 118 | 17,457               | 4 | 0 | 4 | 127 | 17,678               | 4 | 0 | 4 | 129 |
|                |               |               |              | T3M        | 16,748               | 4 | 0 | 4 | 122 | 18,042               | 4 | 0 | 4 | 132 | 18,271               | 4 | 0 | 4 | 133 |
|                |               |               |              | T4M        | 16,432               | 4 | 0 | 4 | 120 | 17,702               | 4 | 0 | 4 | 129 | 17,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | TFTM       | 16,857               | 4 | 0 | 4 | 123 | 18,159               | 4 | 0 | 4 | 133 | 18,389               | 4 | 0 | 4 | 134 |
|                |               |               |              | TSVS       | 16,975               | 4 | 0 | 1 | 124 | 18,287               | 4 | 0 | 1 | 133 | 18,518               | 4 | 0 | 1 | 135 |
|                |               |               |              | T5S        | 16,832               | 4 | 0 | 1 | 123 | 18,133               | 4 | 0 | 2 | 132 | 18,362               | 4 | 0 | 2 | 134 |
|                |               |               |              | T5M        | 16,828               | 4 | 0 | 2 | 123 | 18,128               | 4 | 0 | 2 | 132 | 18,358               | 4 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 16,677               | 4 | 0 | 3 | 122 | 17,966               | 5 | 0 | 3 | 131 | 18,193               | 5 | 0 | 3 | 133 |
|                |               |               |              | BLC        | 13,845               | 3 | 0 | 3 | 101 | 14,915               | 3 | 0 | 3 | 109 | 15,103               | 3 | 0 | 3 | 110 |
|                |               |               |              | LCCO       | 9,888                | 1 | 0 | 3 | 72  | 10,652               | 2 | 0 | 3 | 78  | 10,787               | 2 | 0 | 3 | 79  |
|                |               |               |              | RCCO       | 9,875                | 4 | 0 | 4 | 72  | 10,638               | 4 | 0 | 4 | 78  | 10,773               | 4 | 0 | 4 | 79  |
| 60             | 1050          | P12           | 207W         | T1S        | 22,996               | 4 | 0 | 4 | 111 | 24,773               | 4 | 0 | 4 | 120 | 25,087               | 4 | 0 | 4 | 121 |
|                |               |               |              | T2S        | 22,864               | 4 | 0 | 4 | 110 | 24,631               | 5 | 0 | 5 | 119 | 24,943               | 5 | 0 | 5 | 120 |
|                |               |               |              | T2M        | 23,277               | 4 | 0 | 4 | 112 | 25,075               | 4 | 0 | 4 | 121 | 25,393               | 4 | 0 | 4 | 123 |
|                |               |               |              | T3S        | 22,509               | 4 | 0 | 4 | 109 | 24,248               | 5 | 0 | 5 | 117 | 24,555               | 5 | 0 | 5 | 119 |
|                |               |               |              | T3M        | 23,263               | 4 | 0 | 4 | 112 | 25,061               | 4 | 0 | 4 | 121 | 25,378               | 4 | 0 | 4 | 123 |
|                |               |               |              | T4M        | 22,824               | 5 | 0 | 5 | 110 | 24,588               | 5 | 0 | 5 | 119 | 24,899               | 5 | 0 | 5 | 120 |
|                |               |               |              | TFTM       | 23,414               | 5 | 0 | 5 | 113 | 25,223               | 5 | 0 | 5 | 122 | 25,543               | 5 | 0 | 5 | 123 |
|                |               |               |              | TSVS       | 23,579               | 5 | 0 | 1 | 114 | 25,401               | 5 | 0 | 1 | 123 | 25,722               | 5 | 0 | 1 | 124 |
|                |               |               |              | T5S        | 23,380               | 4 | 0 | 2 | 113 | 25,187               | 4 | 0 | 2 | 122 | 25,506               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,165               | 5 | 0 | 4 | 112 | 24,955               | 5 | 0 | 4 | 121 | 25,271               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 19,231               | 4 | 0 | 4 | 93  | 20,717               | 4 | 0 | 4 | 100 | 20,979               | 4 | 0 | 4 | 101 |
|                |               |               |              | LCCO       | 13,734               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,716               | 4 | 0 | 4 | 66  | 14,776               | 4 | 0 | 4 | 71  | 14,963               | 4 | 0 | 4 | 72  |
| 60             | 1250          | P13           | 231W         | T1S        | 25,400               | 4 | 0 | 4 | 110 | 27,363               | 4 | 0 | 4 | 118 | 27,709               | 4 | 0 | 4 | 120 |
|                |               |               |              | T2S        | 25,254               | 5 | 0 | 5 | 109 | 27,205               | 5 | 0 | 5 | 118 | 27,550               | 5 | 0 | 5 | 119 |
|                |               |               |              | T2M        | 25,710               | 4 | 0 | 4 | 111 | 27,696               | 4 | 0 | 4 | 120 | 28,047               | 4 | 0 | 4 | 121 |
|                |               |               |              | T3S        | 24,862               | 5 | 0 | 5 | 108 | 26,783               | 5 | 0 | 5 | 116 | 27,122               | 5 | 0 | 5 | 117 |
|                |               |               |              | T3M        | 25,695               | 5 | 0 | 5 | 111 | 27,680               | 5 | 0 | 5 | 120 | 28,031               | 5 | 0 | 5 | 121 |
|                |               |               |              | T4M        | 25,210               | 5 | 0 | 5 | 109 | 27,158               | 5 | 0 | 5 | 118 | 27,502               | 5 | 0 | 5 | 119 |
|                |               |               |              | TFTM       | 25,861               | 5 | 0 | 5 | 112 | 27,860               | 5 | 0 | 5 | 121 | 28,212               | 5 | 0 | 5 | 122 |
|                |               |               |              | TSVS       | 26,043               | 5 | 0 | 1 | 113 | 28,056               | 5 | 0 | 1 | 121 | 28,411               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 25,824               | 4 | 0 | 2 | 112 | 27,819               | 5 | 0 | 2 | 120 | 28,172               | 5 | 0 | 2 | 122 |
|                |               |               |              | T5M        | 25,818               | 5 | 0 | 3 | 112 | 27,813               | 5 | 0 | 3 | 120 | 28,165               | 5 | 0 | 3 | 122 |
|                |               |               |              | TSW        | 25,586               | 5 | 0 | 4 | 111 | 27,563               | 5 | 0 | 4 | 119 | 27,912               | 5 | 0 | 4 | 121 |
|                |               |               |              | BLC        | 21,241               | 4 | 0 | 4 | 92  | 22,882               | 4 | 0 | 4 | 99  | 23,172               | 4 | 0 | 4 | 100 |
|                |               |               |              | LCCO       | 15,170               | 2 | 0 | 4 | 66  | 16,342               | 2 | 0 | 4 | 71  | 16,549               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 15,150               | 5 | 0 | 5 | 66  | 16,321               | 5 | 0 | 5 | 71  | 16,527               | 5 | 0 | 5 | 72  |

## A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

### LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product.

Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.





# D-Series Size 1 LED Area Luminaire

d#series




|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

|                      |  |
|----------------------|--|
| <b>EPA:</b>          | 1.01 ft <sup>2</sup><br>(0.09 m <sup>2</sup> ) |
| <b>Length:</b>       | 33"<br>(83.8 cm)                               |
| <b>Width:</b>        | 13"<br>(33.0 cm)                               |
| <b>Height H1:</b>    | 7-1/2"<br>(19.0 cm)                            |
| <b>Height H2:</b>    | 3-1/2"   |
| <b>Weight (max):</b> | 27 lbs<br>(12.2 kg)                            |

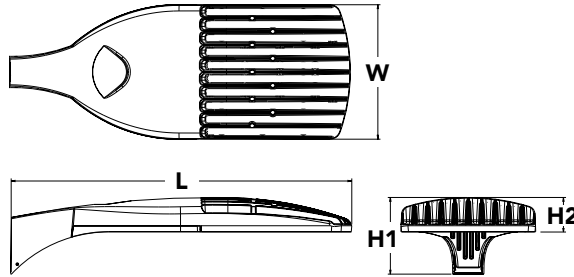

## Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

A+ Capable options indicated by this color background.

## Ordering Information

**EXAMPLE:** DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

| DSX1 LED        |   |                          |                                   |  |   |  |  |
|-----------------|---|--------------------------|-----------------------------------|--|---|--|--|
| Series          | LEDs  | Color temperature        |                                   | Distribution   |   | Voltage  | Mounting   |
| <b>DSX1 LED</b> | <b>Forward optics</b><br>P1 <b>P4</b> P7<br>P2 P5 P8<br>P3 P6 P9<br><b>Rotated optics</b><br>P10 <sup>1</sup> P12 <sup>1</sup><br>P11 <sup>1</sup> P13 <sup>1</sup> | 30K<br>40K<br><b>50K</b> | 3000 K<br>4000 K<br><b>5000 K</b> | T1S Type I short<br>T2S Type II short<br>T2M Type II medium<br>T3S Type III short<br>T3M Type III medium<br>T4M Type IV medium<br><b>TFTM</b> Forward throw medium | T5VS Type V very short<br>T5S Type V short<br>T5M Type V medium<br>T5W Type V wide<br>BLC Backlight control <sup>2</sup><br>LCCO Left corner cutoff <sup>2</sup><br>RCCO Right corner cutoff <sup>2</sup> | <b>MVOLT<sup>3</sup></b><br>120 <sup>4</sup><br>208 <sup>4</sup><br>240 <sup>4</sup><br>277 <sup>4</sup><br>347 <sup>4,5</sup><br>480 <sup>4,5</sup> | <b>Shipped included</b><br><b>SPA</b> <b>Square pole mounting</b><br>RPA Round pole mounting<br>WBA Wall bracket<br>SPUMBA Square pole universal mounting adaptor <sup>6</sup><br>RPUMBA Round pole universal mounting adaptor <sup>6</sup><br><b>Shipped separately</b><br>KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) <sup>7</sup> |

| Control options  | Other options   | Finish (required)  |
|--|---|--|
| <b>Shipped installed</b><br>NLTAIR2 nLight AIR generation 2 enabled <sup>8</sup><br>PIRHN Network, high/low motion/ambient sensor <sup>9</sup><br>PER NEMA twist-lock receptacle only (controls ordered separate) <sup>10</sup><br>PER5 Five-pin receptacle only (controls ordered separate) <sup>10,11</sup><br>PER7 Seven-pin receptacle only (controls ordered separate) <sup>10,11</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>12</sup><br>DS Dual switching <sup>12,13,14</sup> | PIR High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup><br>PIRH High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup><br>PIR1FC3V High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup><br>PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup><br>FAO Field adjustable output <sup>14</sup> | <b>Shipped installed</b><br><b>HS</b> <b>House-side shield<sup>17</sup></b><br>SF Single fuse (120, 277, 347V) <sup>4</sup><br>DF Double fuse (208, 240, 480V) <sup>4</sup><br>L90 Left rotated optics <sup>1</sup><br>R90 Right rotated optics <sup>1</sup><br><b>Shipped separately</b><br>BS Bird spikes <sup>18</sup><br>EGS External glare shield <sup>18</sup> |
|  |   | DDBXD Dark bronze<br>DBLXD Black<br>DNAXD Natural aluminum<br>DWHXD White<br>DDBTXD Textured dark bronze<br>DBLBXD Textured black<br>DNATXD Textured natural aluminum<br>DWHGXD Textured white   |





## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photocell - SSL twist-lock (120-277V) <sup>19</sup>                             |
| DLL347F 1.5 CUL JU | Photocell - SSL twist-lock (347V) <sup>19</sup>                                 |
| DLL480F 1.5 CUL JU | Photocell - SSL twist-lock (480V) <sup>19</sup>                                 |
| DSHORT SBK U       | Shorting cap <sup>19</sup>  |
| DSX1HS 30C U       | House-side shield for P1, P2, P3, P4 and P5 <sup>17</sup>                       |
| DSX1HS 40C U       | House-side shield for P6 and P7 <sup>17</sup>                                   |
| DSX1HS 60C U       | House-side shield for P8, P9, P10, P11 and P12 <sup>17</sup>                    |
| PUMBA DDBXD U*     | Square and round pole universal mounting bracket (specify finish) <sup>20</sup> |
| KMA8 DDBXD U       | Mast arm mounting bracket adaptor (specify finish) <sup>6</sup>                 |


For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAIR2. For more information on Light Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits with isolated neutral. See Outdoor Control Technical Guide for details.
- Reference Motion Sensor table on page 4.
- Reference controls options table on page 4 to see functionality.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.


## Options

### EGS - External Glare Shield

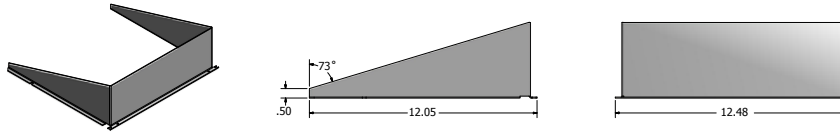

## Drilling

### HANDHOLE ORIENTATION




### Tenon Mounting Slipfitter\*\*

| Tenon O.D. | Mounting | Single Unit | 2 @ 180   | 2 @ 90    | 3 @ 120   | 3 @ 90    | 4 @ 90    |
|------------|----------|-------------|-----------|-----------|-----------|-----------|-----------|
| 2-3/8"     | SPA/RPA  | AS3-5 190   | AS3-5 280 | AS3-5 290 | AS3-5 320 | AS3-5 390 | AS3-5 490 |
|            | SPUMBA   | AS3-5 190   | AS3-5 280 | AS4-5 290 | AS3-5 320 | AS4-5 390 | AS4-5 490 |
|            | RUPUMBA  | AS3-5 190   | AS3-5 280 |           | AS3-5 320 |           |           |
| 2-7/8"     | SPA/RPA  | AST25-190   | AST25-280 | AST25-290 | AST25-320 | AST25-390 | AST25-490 |
|            | SPUMBA   | AST25-190   | AST25-280 |           | AST25-320 |           |           |
|            | RUPUMBA  | AST25-190   | AST25-280 |           | AST25-320 |           |           |
| 4"         | SPA/RPA  | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | SPUMBA   | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | RUPUMBA  | AST35-190   | AST35-280 |           | AST35-320 |           |           |

Template #8

Top of Pole

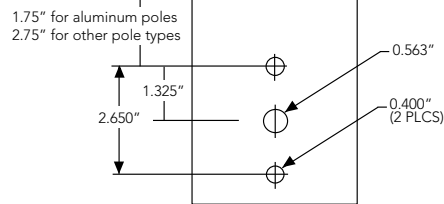


| Mounting Option    | Drilling Template | Single | 2 @ 180    | 2 @ 90     | 3 @ 90        | 3 @ 120         | 4 @ 90           |
|--------------------|-------------------|--------|------------|------------|---------------|-----------------|------------------|
| Head Location      |                   | Side B | Side B & D | Side B & C | Side B, C & D | Round Pole Only | Side A, B, C & D |
| Drill Nomenclature | #8                | DM19AS | DM28AS     | DM29AS     | DM39AS        | DM32AS          | DM49AS           |

|        | Drilling Template | Minimum Acceptable Outside Pole Dimension |        |      |      |      |      |
|--------|-------------------|---|--------|------|------|------|------|
| SPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| RPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| SPUMBA | #5                | 2-7/8"                                    | 3"     | 4"   | 4"   | 3.5" | 4"   |
| RPUMBA | #5                | 2-7/8"                                    | 3.5"   | 5"   | 5"   | 3.5" | 5"   |

# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

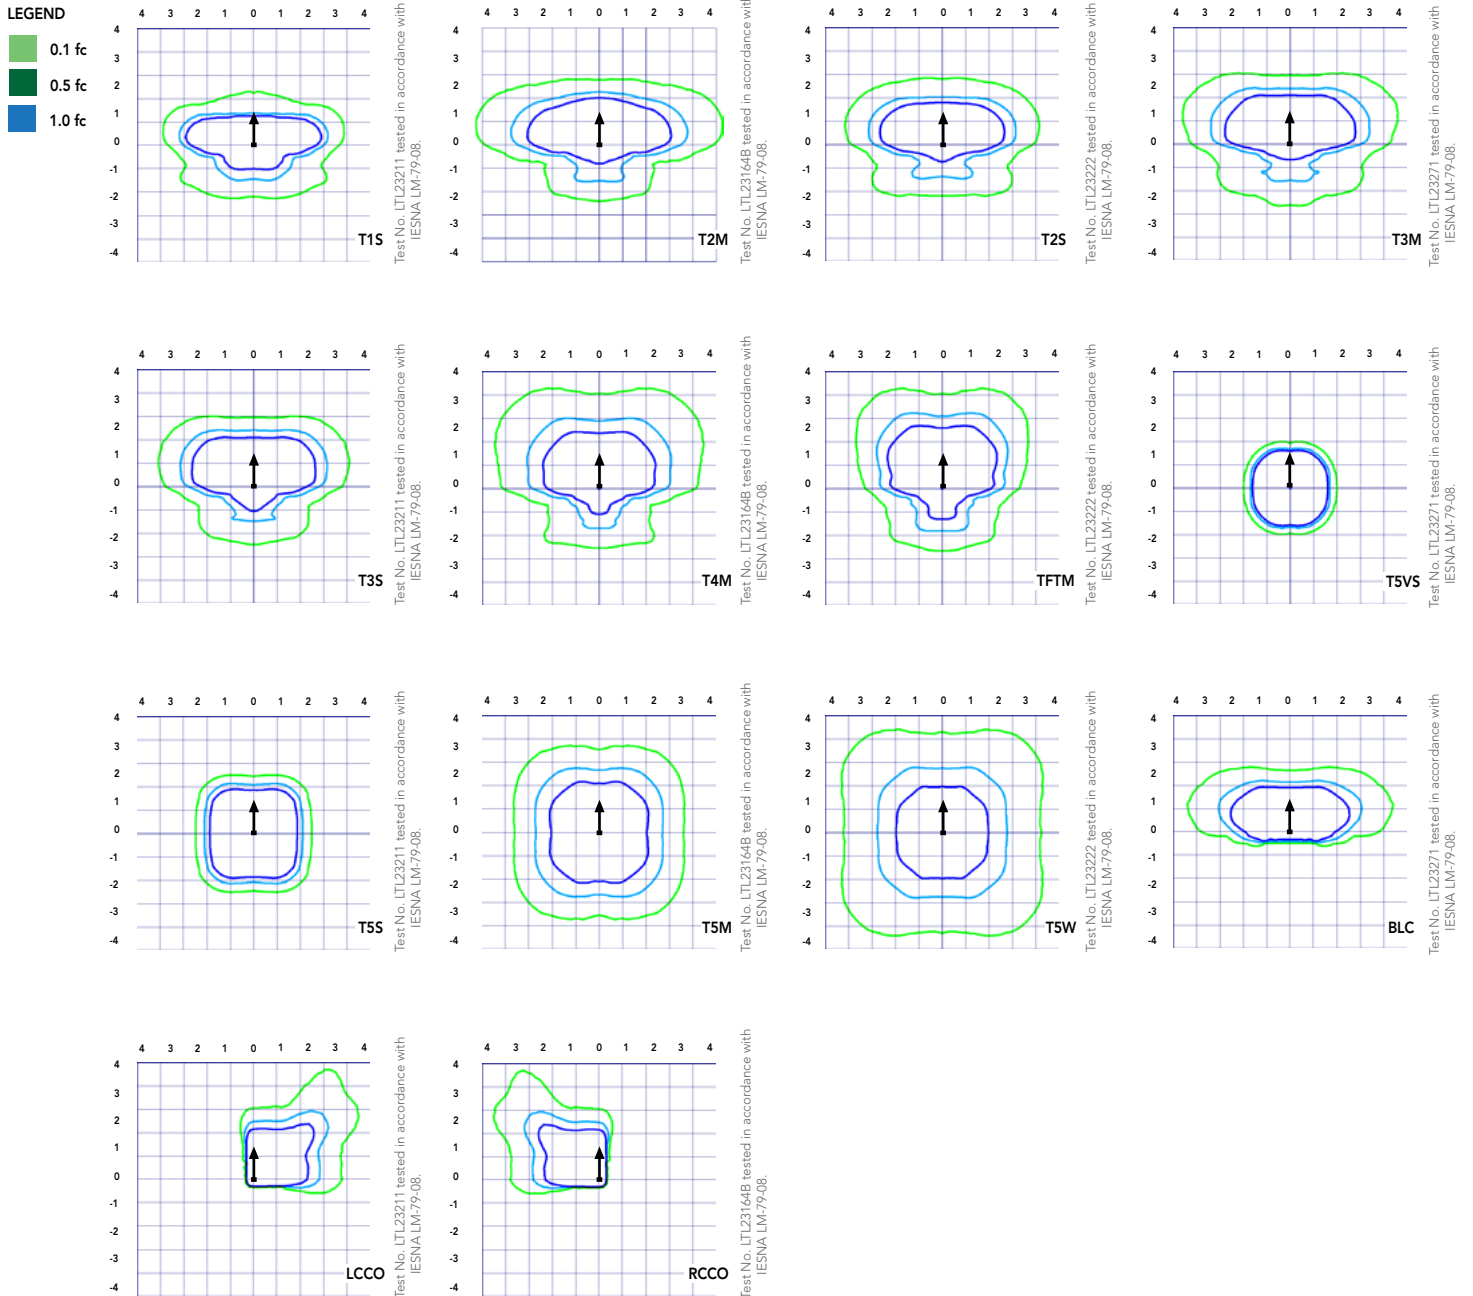

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.04             |
| 5°C         | 41°F        | 1.04             |
| 10°C        | 50°F        | 1.03             |
| 15°C        | 59°F        | 1.02             |
| 20°C        | 68°F        | 1.01             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 0.99             |
| 35°C        | 95°F        | 0.98             |
| 40°C        | 104°F       | 0.97             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | Lumen Maintenance Factor |
|-----------------|--------------------------|
| 0               | 1.00                     |
| 25,000          | 0.96                     |
| 50,000          | 0.92                     |
| 100,000         | 0.85                     |

#### Motion Sensor Default Settings

| Option                 | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|------------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| PIR or PIRH            | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| *PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use when motion sensor is used as dusk to dawn control.

### Electrical Load

|                                      | Performance Package | LED Count | Drive Current | Wattage | Current (A) |      |      |      |      |      |
|--------------------------------------|---------------------|-----------|---------------|---------|-------------|------|------|------|------|------|
|                                      |                     |           |               |         | 120         | 208  | 240  | 277  | 347  | 480  |
| Forward Optics (Non-Rotated)         | P1                  | 30        | 530           | 54      | 0.45        | 0.26 | 0.23 | 0.19 | 0.10 | 0.12 |
|                                      | P2                  | 30        | 700           | 70      | 0.59        | 0.34 | 0.30 | 0.25 | 0.20 | 0.16 |
|                                      | P3                  | 30        | 1050          | 102     | 0.86        | 0.50 | 0.44 | 0.38 | 0.30 | 0.22 |
|                                      | P4                  | 30        | 1250          | 125     | 1.06        | 0.60 | 0.52 | 0.46 | 0.37 | 0.27 |
|                                      | P5                  | 30        | 1400          | 138     | 1.16        | 0.67 | 0.58 | 0.51 | 0.40 | 0.29 |
|                                      | P6                  | 40        | 1250          | 163     | 1.36        | 0.78 | 0.68 | 0.59 | 0.47 | 0.34 |
|                                      | P7                  | 40        | 1400          | 183     | 1.53        | 0.88 | 0.76 | 0.66 | 0.53 | 0.38 |
|                                      | P8                  | 60        | 1050          | 207     | 1.74        | 0.98 | 0.87 | 0.76 | 0.64 | 0.49 |
|                                      | P9                  | 60        | 1250          | 241     | 2.01        | 1.16 | 1.01 | 0.89 | 0.70 | 0.51 |
| Rotated Optics (Requires L90 or R90) | P10                 | 60        | 530           | 106     | 0.90        | 0.52 | 0.47 | 0.43 | 0.33 | 0.27 |
|                                      | P11                 | 60        | 700           | 137     | 1.15        | 0.67 | 0.60 | 0.53 | 0.42 | 0.32 |
|                                      | P12                 | 60        | 1050          | 207     | 1.74        | 0.99 | 0.87 | 0.76 | 0.60 | 0.46 |
|                                      | P13                 | 60        | 1250          | 231     | 1.93        | 1.12 | 0.97 | 0.86 | 0.67 | 0.49 |

#### Controls Options

| Nomenclature  | Description   | Functionality   | Primary control device  | Notes  |
|---------------|---|---|---|--|
| FA0           | Field adjustable output device installed inside the luminaire; wired to the driver dimming leads. | Allows the luminaire to be manually dimmed, effectively trimming the light output.  | FA0 device  | Cannot be used with other controls options that need the 0-10V leads                                 |
| DS            | Drivers wired independently for 50/50 luminaire operation   | The luminaire is wired to two separate circuits, allowing for 50/50 operation.  | Independently wired drivers   | Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative. |
| PERS or PER7  | Twist-lock photocell receptacle   | Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.              | Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM. | Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire                        |
| PIR or PIRH   | Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting          | Luminaires dim when no occupancy is detected.   | Acuity Controls SBOR  | Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.          |
| NLTAIR2 PIRHN | nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.            | Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse. | nLight Air rSDGR  | nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.    |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 30             | 530           | P1            | 54W          | T1S        | 6,457                | 2 | 0 | 2 | 120 | 6,956                | 2 | 0 | 2 | 129 | 7,044                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2S        | 6,450                | 2 | 0 | 2 | 119 | 6,949                | 2 | 0 | 2 | 129 | 7,037                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2M        | 6,483                | 1 | 0 | 1 | 120 | 6,984                | 2 | 0 | 2 | 129 | 7,073                | 2 | 0 | 2 | 131 |
|                |               |               |              | T3S        | 6,279                | 2 | 0 | 2 | 116 | 6,764                | 2 | 0 | 2 | 125 | 6,850                | 2 | 0 | 2 | 127 |
|                |               |               |              | T3M        | 6,468                | 1 | 0 | 2 | 120 | 6,967                | 1 | 0 | 2 | 129 | 7,056                | 1 | 0 | 2 | 131 |
|                |               |               |              | T4M        | 6,327                | 1 | 0 | 2 | 117 | 6,816                | 1 | 0 | 2 | 126 | 6,902                | 1 | 0 | 2 | 128 |
|                |               |               |              | TFTM       | 6,464                | 1 | 0 | 2 | 120 | 6,963                | 1 | 0 | 2 | 129 | 7,051                | 1 | 0 | 2 | 131 |
|                |               |               |              | TSVS       | 6,722                | 2 | 0 | 0 | 124 | 7,242                | 3 | 0 | 0 | 134 | 7,334                | 3 | 0 | 0 | 136 |
|                |               |               |              | T5S        | 6,728                | 2 | 0 | 1 | 125 | 7,248                | 2 | 0 | 1 | 134 | 7,340                | 2 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 6,711                | 3 | 0 | 1 | 124 | 7,229                | 3 | 0 | 1 | 134 | 7,321                | 3 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 6,667                | 3 | 0 | 2 | 123 | 7,182                | 3 | 0 | 2 | 133 | 7,273                | 3 | 0 | 2 | 135 |
|                |               |               |              | BLC        | 5,299                | 1 | 0 | 1 | 98  | 5,709                | 1 | 0 | 2 | 106 | 5,781                | 1 | 0 | 2 | 107 |
|                |               |               |              | LCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
|                |               |               |              | RCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
| 30             | 700           | P2            | 70W          | T1S        | 8,249                | 2 | 0 | 2 | 118 | 8,886                | 2 | 0 | 2 | 127 | 8,999                | 2 | 0 | 2 | 129 |
|                |               |               |              | T2S        | 8,240                | 2 | 0 | 2 | 118 | 8,877                | 2 | 0 | 2 | 127 | 8,989                | 2 | 0 | 2 | 128 |
|                |               |               |              | T2M        | 8,283                | 2 | 0 | 2 | 118 | 8,923                | 2 | 0 | 2 | 127 | 9,036                | 2 | 0 | 2 | 129 |
|                |               |               |              | T3S        | 8,021                | 2 | 0 | 2 | 115 | 8,641                | 2 | 0 | 2 | 123 | 8,751                | 2 | 0 | 2 | 125 |
|                |               |               |              | T3M        | 8,263                | 2 | 0 | 2 | 118 | 8,901                | 2 | 0 | 2 | 127 | 9,014                | 2 | 0 | 2 | 129 |
|                |               |               |              | T4M        | 8,083                | 2 | 0 | 2 | 115 | 8,708                | 2 | 0 | 2 | 124 | 8,818                | 2 | 0 | 2 | 126 |
|                |               |               |              | TFTM       | 8,257                | 2 | 0 | 2 | 118 | 8,896                | 2 | 0 | 2 | 127 | 9,008                | 2 | 0 | 2 | 129 |
|                |               |               |              | TSVS       | 8,588                | 3 | 0 | 0 | 123 | 9,252                | 3 | 0 | 0 | 132 | 9,369                | 3 | 0 | 0 | 134 |
|                |               |               |              | T5S        | 8,595                | 3 | 0 | 1 | 123 | 9,259                | 3 | 0 | 1 | 132 | 9,376                | 3 | 0 | 1 | 134 |
|                |               |               |              | T5M        | 8,573                | 3 | 0 | 2 | 122 | 9,236                | 3 | 0 | 2 | 132 | 9,353                | 3 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 8,517                | 3 | 0 | 2 | 122 | 9,175                | 4 | 0 | 2 | 131 | 9,291                | 4 | 0 | 2 | 133 |
|                |               |               |              | BLC        | 6,770                | 1 | 0 | 2 | 97  | 7,293                | 1 | 0 | 2 | 104 | 7,386                | 1 | 0 | 2 | 106 |
|                |               |               |              | LCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
|                |               |               |              | RCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
| 30             | 1050          | P3            | 102W         | T1S        | 11,661               | 2 | 0 | 2 | 114 | 12,562               | 3 | 0 | 3 | 123 | 12,721               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2S        | 11,648               | 2 | 0 | 2 | 114 | 12,548               | 3 | 0 | 3 | 123 | 12,707               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2M        | 11,708               | 2 | 0 | 2 | 115 | 12,613               | 2 | 0 | 2 | 124 | 12,773               | 2 | 0 | 2 | 125 |
|                |               |               |              | T3S        | 11,339               | 2 | 0 | 2 | 111 | 12,215               | 3 | 0 | 3 | 120 | 12,370               | 3 | 0 | 3 | 121 |
|                |               |               |              | T3M        | 11,680               | 2 | 0 | 2 | 115 | 12,582               | 2 | 0 | 2 | 123 | 12,742               | 2 | 0 | 2 | 125 |
|                |               |               |              | T4M        | 11,426               | 2 | 0 | 3 | 112 | 12,309               | 2 | 0 | 3 | 121 | 12,465               | 2 | 0 | 3 | 122 |
|                |               |               |              | TFTM       | 11,673               | 2 | 0 | 2 | 114 | 12,575               | 2 | 0 | 3 | 123 | 12,734               | 2 | 0 | 3 | 125 |
|                |               |               |              | TSVS       | 12,140               | 3 | 0 | 1 | 119 | 13,078               | 3 | 0 | 1 | 128 | 13,244               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5S        | 12,150               | 3 | 0 | 1 | 119 | 13,089               | 3 | 0 | 1 | 128 | 13,254               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5M        | 12,119               | 4 | 0 | 2 | 119 | 13,056               | 4 | 0 | 2 | 128 | 13,221               | 4 | 0 | 2 | 130 |
|                |               |               |              | TSW        | 12,040               | 4 | 0 | 3 | 118 | 12,970               | 4 | 0 | 3 | 127 | 13,134               | 4 | 0 | 3 | 129 |
|                |               |               |              | BLC        | 9,570                | 1 | 0 | 2 | 94  | 10,310               | 1 | 0 | 2 | 101 | 10,440               | 1 | 0 | 2 | 102 |
|                |               |               |              | LCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
|                |               |               |              | RCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
| 30             | 1250          | P4            | 125W         | T1S        | 13,435               | 3 | 0 | 3 | 107 | 14,473               | 3 | 0 | 3 | 116 | 14,657               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2S        | 13,421               | 3 | 0 | 3 | 107 | 14,458               | 3 | 0 | 3 | 116 | 14,641               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2M        | 13,490               | 2 | 0 | 2 | 108 | 14,532               | 3 | 0 | 3 | 116 | 14,716               | 3 | 0 | 3 | 118 |
|                |               |               |              | T3S        | 13,064               | 3 | 0 | 3 | 105 | 14,074               | 3 | 0 | 3 | 113 | 14,252               | 3 | 0 | 3 | 114 |
|                |               |               |              | T3M        | 13,457               | 2 | 0 | 2 | 108 | 14,497               | 2 | 0 | 2 | 116 | 14,681               | 2 | 0 | 2 | 117 |
|                |               |               |              | T4M        | 13,165               | 2 | 0 | 3 | 105 | 14,182               | 2 | 0 | 3 | 113 | 14,362               | 2 | 0 | 3 | 115 |
|                |               |               |              | TFTM       | 13,449               | 2 | 0 | 3 | 108 | 14,488               | 2 | 0 | 3 | 116 | 14,672               | 2 | 0 | 3 | 117 |
|                |               |               |              | TSVS       | 13,987               | 4 | 0 | 1 | 112 | 15,068               | 4 | 0 | 1 | 121 | 15,259               | 4 | 0 | 1 | 122 |
|                |               |               |              | T5S        | 13,999               | 3 | 0 | 1 | 112 | 15,080               | 3 | 0 | 1 | 121 | 15,271               | 3 | 0 | 1 | 122 |
|                |               |               |              | T5M        | 13,963               | 4 | 0 | 2 | 112 | 15,042               | 4 | 0 | 2 | 120 | 15,233               | 4 | 0 | 2 | 122 |
|                |               |               |              | TSW        | 13,872               | 4 | 0 | 3 | 111 | 14,944               | 4 | 0 | 3 | 120 | 15,133               | 4 | 0 | 3 | 121 |
|                |               |               |              | BLC        | 11,027               | 1 | 0 | 2 | 88  | 11,879               | 1 | 0 | 2 | 95  | 12,029               | 1 | 0 | 2 | 96  |
|                |               |               |              | LCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
| 30             | 1400          | P5            | 138W         | T1S        | 14,679               | 3 | 0 | 3 | 106 | 15,814               | 3 | 0 | 3 | 115 | 16,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 14,664               | 3 | 0 | 3 | 106 | 15,797               | 3 | 0 | 3 | 114 | 15,997               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2M        | 14,739               | 3 | 0 | 3 | 107 | 15,878               | 3 | 0 | 3 | 115 | 16,079               | 3 | 0 | 3 | 117 |
|                |               |               |              | T3S        | 14,274               | 3 | 0 | 3 | 103 | 15,377               | 3 | 0 | 3 | 111 | 15,572               | 3 | 0 | 3 | 113 |
|                |               |               |              | T3M        | 14,704               | 2 | 0 | 3 | 107 | 15,840               | 3 | 0 | 3 | 115 | 16,040               | 3 | 0 | 3 | 116 |
|                |               |               |              | T4M        | 14,384               | 2 | 0 | 3 | 104 | 15,496               | 3 | 0 | 3 | 112 | 15,692               | 3 | 0 | 3 | 114 |
|                |               |               |              | TFTM       | 14,695               | 2 | 0 | 3 | 106 | 15,830               | 3 | 0 | 3 | 115 | 16,030               | 3 | 0 | 3 | 116 |
|                |               |               |              | TSVS       | 15,283               | 4 | 0 | 1 | 111 | 16,464               | 4 | 0 | 1 | 119 | 16,672               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 15,295               | 3 | 0 | 1 | 111 | 16,477               | 4 | 0 | 1 | 119 | 16,686               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5M        | 15,257               | 4 | 0 | 2 | 111 | 16,435               | 4 | 0 | 2 | 119 | 16,644               | 4 | 0 | 2 | 121 |
|                |               |               |              | TSW        | 15,157               | 4 | 0 | 3 | 110 | 16,328               | 4 | 0 | 3 | 118 | 16,534               | 4 | 0 | 3 | 120 |
|                |               |               |              | BLC        | 12,048               | 1 | 0 | 2 | 87  | 12,979               | 1 | 0 | 2 | 94  | 13,143               | 1 | 0 | 2 | 95  |
|                |               |               |              | LCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |
|                |               |               |              | RCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 40             | 1250          | P6            | 163W         | T1S        | 17,654               | 3 | 0 | 3 | 108 | 19,018               | 3 | 0 | 3 | 117 | 19,259               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2S        | 17,635               | 3 | 0 | 3 | 108 | 18,998               | 3 | 0 | 3 | 117 | 19,238               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2M        | 17,726               | 3 | 0 | 3 | 109 | 19,096               | 3 | 0 | 3 | 117 | 19,337               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 17,167               | 3 | 0 | 3 | 105 | 18,493               | 3 | 0 | 3 | 113 | 18,727               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3M        | 17,683               | 3 | 0 | 3 | 108 | 19,049               | 3 | 0 | 3 | 117 | 19,290               | 3 | 0 | 3 | 118 |
|                |               |               |              | T4M        | 17,299               | 3 | 0 | 3 | 106 | 18,635               | 3 | 0 | 4 | 114 | 18,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 17,672               | 3 | 0 | 3 | 108 | 19,038               | 3 | 0 | 4 | 117 | 19,279               | 3 | 0 | 4 | 118 |
|                |               |               |              | TSVS       | 18,379               | 4 | 0 | 1 | 113 | 19,800               | 4 | 0 | 1 | 121 | 20,050               | 4 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 18,394               | 4 | 0 | 2 | 113 | 19,816               | 4 | 0 | 2 | 122 | 20,066               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 18,348               | 4 | 0 | 2 | 113 | 19,766               | 4 | 0 | 2 | 121 | 20,016               | 4 | 0 | 2 | 123 |
|                |               |               |              | TSW        | 18,228               | 5 | 0 | 3 | 112 | 19,636               | 5 | 0 | 3 | 120 | 19,885               | 5 | 0 | 3 | 122 |
|                |               |               |              | BLC        | 14,489               | 2 | 0 | 2 | 89  | 15,609               | 2 | 0 | 3 | 96  | 15,806               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
| 40             | 1400          | P7            | 183W         | T1S        | 19,227               | 3 | 0 | 3 | 105 | 20,712               | 3 | 0 | 3 | 113 | 20,975               | 3 | 0 | 3 | 115 |
|                |               |               |              | T2S        | 19,206               | 3 | 0 | 3 | 105 | 20,690               | 3 | 0 | 3 | 113 | 20,952               | 3 | 0 | 3 | 114 |
|                |               |               |              | T2M        | 19,305               | 3 | 0 | 3 | 105 | 20,797               | 3 | 0 | 3 | 114 | 21,060               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3S        | 18,696               | 3 | 0 | 3 | 102 | 20,141               | 3 | 0 | 3 | 110 | 20,396               | 3 | 0 | 4 | 111 |
|                |               |               |              | T3M        | 19,258               | 3 | 0 | 3 | 105 | 20,746               | 3 | 0 | 3 | 113 | 21,009               | 3 | 0 | 3 | 115 |
|                |               |               |              | T4M        | 18,840               | 3 | 0 | 4 | 103 | 20,296               | 3 | 0 | 4 | 111 | 20,553               | 3 | 0 | 4 | 112 |
|                |               |               |              | TFTM       | 19,246               | 3 | 0 | 4 | 105 | 20,734               | 3 | 0 | 4 | 113 | 20,996               | 3 | 0 | 4 | 115 |
|                |               |               |              | TSVS       | 20,017               | 4 | 0 | 1 | 109 | 21,564               | 4 | 0 | 1 | 118 | 21,837               | 4 | 0 | 1 | 119 |
|                |               |               |              | T5S        | 20,033               | 4 | 0 | 2 | 109 | 21,581               | 4 | 0 | 2 | 118 | 21,854               | 4 | 0 | 2 | 119 |
|                |               |               |              | T5M        | 19,983               | 4 | 0 | 2 | 109 | 21,527               | 5 | 0 | 3 | 118 | 21,799               | 5 | 0 | 3 | 119 |
|                |               |               |              | TSW        | 19,852               | 5 | 0 | 3 | 108 | 21,386               | 5 | 0 | 3 | 117 | 21,656               | 5 | 0 | 3 | 118 |
|                |               |               |              | BLC        | 15,780               | 2 | 0 | 3 | 86  | 16,999               | 2 | 0 | 3 | 93  | 17,214               | 2 | 0 | 3 | 94  |
|                |               |               |              | LCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
|                |               |               |              | RCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
| 60             | 1050          | P8            | 207W         | T1S        | 22,490               | 3 | 0 | 3 | 109 | 24,228               | 3 | 0 | 3 | 117 | 24,535               | 3 | 0 | 3 | 119 |
|                |               |               |              | T2S        | 22,466               | 3 | 0 | 4 | 109 | 24,202               | 3 | 0 | 4 | 117 | 24,509               | 3 | 0 | 4 | 118 |
|                |               |               |              | T2M        | 22,582               | 3 | 0 | 3 | 109 | 24,327               | 3 | 0 | 3 | 118 | 24,635               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 21,870               | 3 | 0 | 4 | 106 | 23,560               | 3 | 0 | 4 | 114 | 23,858               | 3 | 0 | 4 | 115 |
|                |               |               |              | T3M        | 22,527               | 3 | 0 | 4 | 109 | 24,268               | 3 | 0 | 4 | 117 | 24,575               | 3 | 0 | 4 | 119 |
|                |               |               |              | T4M        | 22,038               | 3 | 0 | 4 | 106 | 23,741               | 3 | 0 | 4 | 115 | 24,041               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 22,513               | 3 | 0 | 4 | 109 | 24,253               | 3 | 0 | 4 | 117 | 24,560               | 3 | 0 | 4 | 119 |
|                |               |               |              | TSVS       | 23,415               | 5 | 0 | 1 | 113 | 25,224               | 5 | 0 | 1 | 122 | 25,543               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 23,434               | 4 | 0 | 2 | 113 | 25,244               | 4 | 0 | 2 | 122 | 25,564               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,221               | 5 | 0 | 4 | 112 | 25,016               | 5 | 0 | 4 | 121 | 25,332               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 18,458               | 2 | 0 | 3 | 89  | 19,885               | 2 | 0 | 3 | 96  | 20,136               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
| 60             | 1250          | P9            | 241W         | T1S        | 25,575               | 3 | 0 | 3 | 106 | 27,551               | 3 | 0 | 3 | 114 | 27,900               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 25,548               | 3 | 0 | 4 | 106 | 27,522               | 3 | 0 | 4 | 114 | 27,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | T2M        | 25,680               | 3 | 0 | 3 | 107 | 27,664               | 3 | 0 | 3 | 115 | 28,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T3S        | 24,870               | 3 | 0 | 4 | 103 | 26,791               | 3 | 0 | 4 | 111 | 27,130               | 3 | 0 | 4 | 113 |
|                |               |               |              | T3M        | 25,617               | 3 | 0 | 4 | 106 | 27,597               | 3 | 0 | 4 | 115 | 27,946               | 3 | 0 | 4 | 116 |
|                |               |               |              | T4M        | 25,061               | 3 | 0 | 4 | 104 | 26,997               | 3 | 0 | 4 | 112 | 27,339               | 3 | 0 | 4 | 113 |
|                |               |               |              | TFTM       | 25,602               | 3 | 0 | 4 | 106 | 27,580               | 3 | 0 | 4 | 114 | 27,929               | 3 | 0 | 4 | 116 |
|                |               |               |              | TSVS       | 26,626               | 5 | 0 | 1 | 110 | 28,684               | 5 | 0 | 1 | 119 | 29,047               | 5 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 26,648               | 4 | 0 | 2 | 111 | 28,707               | 5 | 0 | 2 | 119 | 29,070               | 5 | 0 | 2 | 121 |
|                |               |               |              | T5M        | 26,581               | 5 | 0 | 3 | 110 | 28,635               | 5 | 0 | 3 | 119 | 28,997               | 5 | 0 | 3 | 120 |
|                |               |               |              | TSW        | 26,406               | 5 | 0 | 4 | 110 | 28,447               | 5 | 0 | 4 | 118 | 28,807               | 5 | 0 | 4 | 120 |
|                |               |               |              | BLC        | 20,990               | 2 | 0 | 3 | 87  | 22,612               | 2 | 0 | 3 | 94  | 22,898               | 2 | 0 | 3 | 95  |
|                |               |               |              | LCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |
|                |               |               |              | RCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Rotated Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 60             | 530           | P10           | 106W         | T1S        | 13,042               | 3 | 0 | 3 | 123 | 14,050               | 3 | 0 | 3 | 133 | 14,228               | 3 | 0 | 3 | 134 |
|                |               |               |              | T2S        | 12,967               | 4 | 0 | 4 | 122 | 13,969               | 4 | 0 | 4 | 132 | 14,146               | 4 | 0 | 4 | 133 |
|                |               |               |              | T2M        | 13,201               | 3 | 0 | 3 | 125 | 14,221               | 3 | 0 | 3 | 134 | 14,401               | 3 | 0 | 3 | 136 |
|                |               |               |              | T3S        | 12,766               | 4 | 0 | 4 | 120 | 13,752               | 4 | 0 | 4 | 130 | 13,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | T3M        | 13,193               | 4 | 0 | 4 | 124 | 14,213               | 4 | 0 | 4 | 134 | 14,393               | 4 | 0 | 4 | 136 |
|                |               |               |              | T4M        | 12,944               | 4 | 0 | 4 | 122 | 13,945               | 4 | 0 | 4 | 132 | 14,121               | 4 | 0 | 4 | 133 |
|                |               |               |              | TFTM       | 13,279               | 4 | 0 | 4 | 125 | 14,305               | 4 | 0 | 4 | 135 | 14,486               | 4 | 0 | 4 | 137 |
|                |               |               |              | TSVS       | 13,372               | 3 | 0 | 1 | 126 | 14,405               | 4 | 0 | 1 | 136 | 14,588               | 4 | 0 | 1 | 138 |
|                |               |               |              | T5S        | 13,260               | 3 | 0 | 1 | 125 | 14,284               | 3 | 0 | 1 | 135 | 14,465               | 3 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 13,256               | 4 | 0 | 2 | 125 | 14,281               | 4 | 0 | 2 | 135 | 14,462               | 4 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 13,137               | 4 | 0 | 3 | 124 | 14,153               | 4 | 0 | 3 | 134 | 14,332               | 4 | 0 | 3 | 135 |
|                |               |               |              | BLC        | 10,906               | 3 | 0 | 3 | 103 | 11,749               | 3 | 0 | 3 | 111 | 11,898               | 3 | 0 | 3 | 112 |
|                |               |               |              | LCCO       | 7,789                | 1 | 0 | 3 | 73  | 8,391                | 1 | 0 | 3 | 79  | 8,497                | 1 | 0 | 3 | 80  |
|                |               |               |              | RCCO       | 7,779                | 4 | 0 | 4 | 73  | 8,380                | 4 | 0 | 4 | 79  | 8,486                | 4 | 0 | 4 | 80  |
| 60             | 700           | P11           | 137W         | T1S        | 16,556               | 3 | 0 | 3 | 121 | 17,835               | 3 | 0 | 3 | 130 | 18,061               | 4 | 0 | 4 | 132 |
|                |               |               |              | T2S        | 16,461               | 4 | 0 | 4 | 120 | 17,733               | 4 | 0 | 4 | 129 | 17,957               | 4 | 0 | 4 | 131 |
|                |               |               |              | T2M        | 16,758               | 4 | 0 | 4 | 122 | 18,053               | 4 | 0 | 4 | 132 | 18,281               | 4 | 0 | 4 | 133 |
|                |               |               |              | T3S        | 16,205               | 4 | 0 | 4 | 118 | 17,457               | 4 | 0 | 4 | 127 | 17,678               | 4 | 0 | 4 | 129 |
|                |               |               |              | T3M        | 16,748               | 4 | 0 | 4 | 122 | 18,042               | 4 | 0 | 4 | 132 | 18,271               | 4 | 0 | 4 | 133 |
|                |               |               |              | T4M        | 16,432               | 4 | 0 | 4 | 120 | 17,702               | 4 | 0 | 4 | 129 | 17,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | TFTM       | 16,857               | 4 | 0 | 4 | 123 | 18,159               | 4 | 0 | 4 | 133 | 18,389               | 4 | 0 | 4 | 134 |
|                |               |               |              | TSVS       | 16,975               | 4 | 0 | 1 | 124 | 18,287               | 4 | 0 | 1 | 133 | 18,518               | 4 | 0 | 1 | 135 |
|                |               |               |              | T5S        | 16,832               | 4 | 0 | 1 | 123 | 18,133               | 4 | 0 | 2 | 132 | 18,362               | 4 | 0 | 2 | 134 |
|                |               |               |              | T5M        | 16,828               | 4 | 0 | 2 | 123 | 18,128               | 4 | 0 | 2 | 132 | 18,358               | 4 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 16,677               | 4 | 0 | 3 | 122 | 17,966               | 5 | 0 | 3 | 131 | 18,193               | 5 | 0 | 3 | 133 |
|                |               |               |              | BLC        | 13,845               | 3 | 0 | 3 | 101 | 14,915               | 3 | 0 | 3 | 109 | 15,103               | 3 | 0 | 3 | 110 |
|                |               |               |              | LCCO       | 9,888                | 1 | 0 | 3 | 72  | 10,652               | 2 | 0 | 3 | 78  | 10,787               | 2 | 0 | 3 | 79  |
|                |               |               |              | RCCO       | 9,875                | 4 | 0 | 4 | 72  | 10,638               | 4 | 0 | 4 | 78  | 10,773               | 4 | 0 | 4 | 79  |
| 60             | 1050          | P12           | 207W         | T1S        | 22,996               | 4 | 0 | 4 | 111 | 24,773               | 4 | 0 | 4 | 120 | 25,087               | 4 | 0 | 4 | 121 |
|                |               |               |              | T2S        | 22,864               | 4 | 0 | 4 | 110 | 24,631               | 5 | 0 | 5 | 119 | 24,943               | 5 | 0 | 5 | 120 |
|                |               |               |              | T2M        | 23,277               | 4 | 0 | 4 | 112 | 25,075               | 4 | 0 | 4 | 121 | 25,393               | 4 | 0 | 4 | 123 |
|                |               |               |              | T3S        | 22,509               | 4 | 0 | 4 | 109 | 24,248               | 5 | 0 | 5 | 117 | 24,555               | 5 | 0 | 5 | 119 |
|                |               |               |              | T3M        | 23,263               | 4 | 0 | 4 | 112 | 25,061               | 4 | 0 | 4 | 121 | 25,378               | 4 | 0 | 4 | 123 |
|                |               |               |              | T4M        | 22,824               | 5 | 0 | 5 | 110 | 24,588               | 5 | 0 | 5 | 119 | 24,899               | 5 | 0 | 5 | 120 |
|                |               |               |              | TFTM       | 23,414               | 5 | 0 | 5 | 113 | 25,223               | 5 | 0 | 5 | 122 | 25,543               | 5 | 0 | 5 | 123 |
|                |               |               |              | TSVS       | 23,579               | 5 | 0 | 1 | 114 | 25,401               | 5 | 0 | 1 | 123 | 25,722               | 5 | 0 | 1 | 124 |
|                |               |               |              | T5S        | 23,380               | 4 | 0 | 2 | 113 | 25,187               | 4 | 0 | 2 | 122 | 25,506               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,165               | 5 | 0 | 4 | 112 | 24,955               | 5 | 0 | 4 | 121 | 25,271               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 19,231               | 4 | 0 | 4 | 93  | 20,717               | 4 | 0 | 4 | 100 | 20,979               | 4 | 0 | 4 | 101 |
|                |               |               |              | LCCO       | 13,734               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,716               | 4 | 0 | 4 | 66  | 14,776               | 4 | 0 | 4 | 71  | 14,963               | 4 | 0 | 4 | 72  |
| 60             | 1250          | P13           | 231W         | T1S        | 25,400               | 4 | 0 | 4 | 110 | 27,363               | 4 | 0 | 4 | 118 | 27,709               | 4 | 0 | 4 | 120 |
|                |               |               |              | T2S        | 25,254               | 5 | 0 | 5 | 109 | 27,205               | 5 | 0 | 5 | 118 | 27,550               | 5 | 0 | 5 | 119 |
|                |               |               |              | T2M        | 25,710               | 4 | 0 | 4 | 111 | 27,696               | 4 | 0 | 4 | 120 | 28,047               | 4 | 0 | 4 | 121 |
|                |               |               |              | T3S        | 24,862               | 5 | 0 | 5 | 108 | 26,783               | 5 | 0 | 5 | 116 | 27,122               | 5 | 0 | 5 | 117 |
|                |               |               |              | T3M        | 25,695               | 5 | 0 | 5 | 111 | 27,680               | 5 | 0 | 5 | 120 | 28,031               | 5 | 0 | 5 | 121 |
|                |               |               |              | T4M        | 25,210               | 5 | 0 | 5 | 109 | 27,158               | 5 | 0 | 5 | 118 | 27,502               | 5 | 0 | 5 | 119 |
|                |               |               |              | TFTM       | 25,861               | 5 | 0 | 5 | 112 | 27,860               | 5 | 0 | 5 | 121 | 28,212               | 5 | 0 | 5 | 122 |
|                |               |               |              | TSVS       | 26,043               | 5 | 0 | 1 | 113 | 28,056               | 5 | 0 | 1 | 121 | 28,411               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 25,824               | 4 | 0 | 2 | 112 | 27,819               | 5 | 0 | 2 | 120 | 28,172               | 5 | 0 | 2 | 122 |
|                |               |               |              | T5M        | 25,818               | 5 | 0 | 3 | 112 | 27,813               | 5 | 0 | 3 | 120 | 28,165               | 5 | 0 | 3 | 122 |
|                |               |               |              | TSW        | 25,586               | 5 | 0 | 4 | 111 | 27,563               | 5 | 0 | 4 | 119 | 27,912               | 5 | 0 | 4 | 121 |
|                |               |               |              | BLC        | 21,241               | 4 | 0 | 4 | 92  | 22,882               | 4 | 0 | 4 | 99  | 23,172               | 4 | 0 | 4 | 100 |
|                |               |               |              | LCCO       | 15,170               | 2 | 0 | 4 | 66  | 16,342               | 2 | 0 | 4 | 71  | 16,549               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 15,150               | 5 | 0 | 5 | 66  | 16,321               | 5 | 0 | 5 | 71  | 16,527               | 5 | 0 | 5 | 72  |

## A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

### LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product.

Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.







# D-Series Size 1 LED Area Luminaire

d#series




|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

|                      |  |
|----------------------|--|
| <b>EPA:</b>          | 1.01 ft <sup>2</sup><br>(0.09 m <sup>2</sup> ) |
| <b>Length:</b>       | 33"<br>(83.8 cm)                               |
| <b>Width:</b>        | 13"<br>(33.0 cm)                               |
| <b>Height H1:</b>    | 7-1/2"<br>(19.0 cm)                            |
| <b>Height H2:</b>    | 3-1/2"   |
| <b>Weight (max):</b> | 27 lbs<br>(12.2 kg)                            |

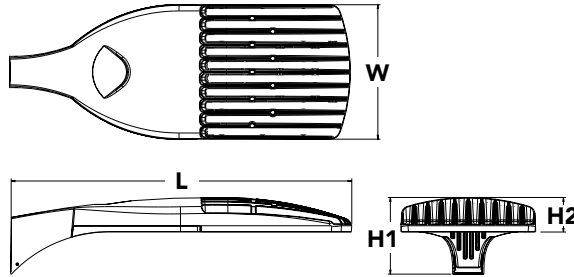

## Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

A+ Capable options indicated by this color background.

## Ordering Information

**EXAMPLE:** DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

| DSX1 LED        |                                   | Color temperature |               | Distribution |                      | Voltage | Mounting                         |                          |  |
|-----------------|-----------------------------------|-------------------|---------------|--------------|----------------------|---------|----------------------------------|--------------------------|--|
| Series          | LEDs                              |                   |               |              |                      |         |                                  |                          |  |
| <b>DSX1 LED</b> | <b>Forward optics</b>             | 30K               | 3000 K        | T1S          | Type I short         | T5VS    | Type V very short                | <b>MVOLT<sup>3</sup></b> | <b>Shipped included</b>  |
|                 | P1 <b>P4</b> P7                   | 40K               | 4000 K        | <b>T2S</b>   | Type II short        | T5S     | Type V short                     | 120 <sup>4</sup>         | <b>SPA</b> <b>Square pole mounting</b>                                       |
|                 | P2 P5 P8                          | <b>50K</b>        | <b>5000 K</b> | T2M          | Type II medium       | T5M     | Type V medium                    | 208 <sup>4</sup>         | RPA Round pole mounting  |
|                 | P3 P6 P9                          |                   |               | T3S          | Type III short       | T5W     | Type V wide                      | 240 <sup>4</sup>         | WBA Wall bracket   |
|                 | <b>Rotated optics</b>             |                   |               | T3M          | Type III medium      | BLC     | Backlight control <sup>2</sup>   | 277 <sup>4</sup>         | SPUMBA Square pole universal mounting adaptor <sup>6</sup>                   |
|                 | P10 <sup>1</sup> P12 <sup>1</sup> |                   |               | T4M          | Type IV medium       | LCCO    | Left corner cutoff <sup>2</sup>  | 347 <sup>4,5</sup>       | RPUMBA Round pole universal mounting adaptor <sup>6</sup>                    |
|                 | P11 <sup>1</sup> P13 <sup>1</sup> |                   |               | TFTM         | Forward throw medium | RCCO    | Right corner cutoff <sup>2</sup> | 480 <sup>4,5</sup>       | <b>Shipped separately</b>  |
|                 |                                   |                   |               |              |                      |         |                                  |                          | KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) <sup>7</sup> |

| Control options   | Other options                                | Finish (required)                |
|---|--|----------------------------------|
| <b>Shipped installed</b>  | <b>Shipped installed</b>                     | DDBXD Dark bronze                |
| NLTAIR2 nLight AIR generation 2 enabled <sup>8</sup>  | HS House-side shield <sup>17</sup>           | DBLXD Black                      |
| PIRHN Network, high/low motion/ambient sensor <sup>9</sup>  | SF Single fuse (120, 277, 347V) <sup>4</sup> | DNAXD Natural aluminum           |
| PER NEMA twist-lock receptacle only (controls ordered separate) <sup>10</sup>                                       | DF Double fuse (208, 240, 480V) <sup>4</sup> | DWHXD White                      |
| PER5 Five-pin receptacle only (controls ordered separate) <sup>10,11</sup>  | L90 Left rotated optics <sup>1</sup>         | DBBTD Textured dark bronze       |
| PER7 Seven-pin receptacle only (controls ordered separate) <sup>10,11</sup>   | R90 Right rotated optics <sup>1</sup>        | DBLBXD Textured black            |
| DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>12</sup> | <b>Shipped separately</b>                    | DNATXD Textured natural aluminum |
| DS Dual switching <sup>12,13,14</sup>   | BS Bird spikes <sup>18</sup>                 | DWHGXD Textured white            |
|   | EGS External glare shield <sup>18</sup>      |                                  |
| PIR High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup>          |  |                                  |
| PIRH High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup>        |  |                                  |
| PIR1FC3V High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup>     |  |                                  |
| PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup>   |  |                                  |
| FAO Field adjustable output <sup>14</sup>   |  |                                  |



## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photocell - SSL twist-lock (120-277V) <sup>19</sup>                             |
| DLL347F 1.5 CUL JU | Photocell - SSL twist-lock (347V) <sup>19</sup>                                 |
| DLL480F 1.5 CUL JU | Photocell - SSL twist-lock (480V) <sup>19</sup>                                 |
| DSHORT SBK U       | Shorting cap <sup>19</sup>  |
| DSX1HS 30C U       | House-side shield for P1, P2, P3, P4 and P5 <sup>17</sup>                       |
| DSX1HS 40C U       | House-side shield for P6 and P7 <sup>17</sup>                                   |
| DSX1HS 60C U       | House-side shield for P8, P9, P10, P11 and P12 <sup>17</sup>                    |
| PUMBA DDBXD U*     | Square and round pole universal mounting bracket (specify finish) <sup>20</sup> |
| KMA8 DDBXD U       | Mast arm mounting bracket adaptor (specify finish) <sup>6</sup>                 |


For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAIR2. For more information on Light Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits with isolated neutral. See Outdoor Control Technical Guide for details.
- Reference Motion Sensor table on page 4.
- Reference controls options table on page 4 to see functionality.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.


## Options

### EGS - External Glare Shield

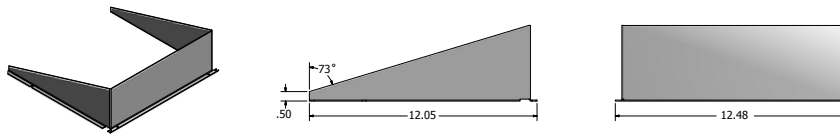

## Drilling

### HANDHOLE ORIENTATION




### Tenon Mounting Slipfitter\*\*

| Tenon O.D. | Mounting | Single Unit | 2 @ 180   | 2 @ 90    | 3 @ 120   | 3 @ 90    | 4 @ 90    |
|------------|----------|-------------|-----------|-----------|-----------|-----------|-----------|
| 2-3/8"     | SPA/RPA  | AS3-5 190   | AS3-5 280 | AS3-5 290 | AS3-5 320 | AS3-5 390 | AS3-5 490 |
|            | SPUMBA   | AS3-5 190   | AS3-5 280 | AS4-5 290 | AS3-5 320 | AS4-5 390 | AS4-5 490 |
|            | RUPUMBA  | AS3-5 190   | AS3-5 280 |           | AS3-5 320 |           |           |
| 2-7/8"     | SPA/RPA  | AST25-190   | AST25-280 | AST25-290 | AST25-320 | AST25-390 | AST25-490 |
|            | SPUMBA   | AST25-190   | AST25-280 |           | AST25-320 |           |           |
|            | RUPUMBA  | AST25-190   | AST25-280 |           | AST25-320 |           |           |
| 4"         | SPA/RPA  | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | SPUMBA   | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | RUPUMBA  | AST35-190   | AST35-280 |           | AST35-320 |           |           |

Template #8

Top of Pole

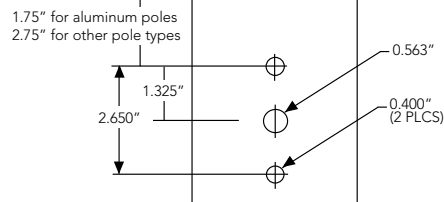

| Mounting Option    | Drilling Template | Single | 2 @ 180    | 2 @ 90     | 3 @ 90        | 3 @ 120         | 4 @ 90           |
|--------------------|-------------------|--------|------------|------------|---------------|-----------------|------------------|
| Head Location      |                   | Side B | Side B & D | Side B & C | Side B, C & D | Round Pole Only | Side A, B, C & D |
| Drill Nomenclature | #8                | DM19AS | DM28AS     | DM29AS     | DM39AS        | DM32AS          | DM49AS           |

|        | Drilling Template | Minimum Acceptable Outside Pole Dimension |        |      |      |      |      |
|--------|-------------------|---|--------|------|------|------|------|
| SPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| RPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| SPUMBA | #5                | 2-7/8"                                    | 3"     | 4"   | 4"   | 3.5" | 4"   |
| RPUMBA | #5                | 2-7/8"                                    | 3.5"   | 5"   | 5"   | 3.5" | 5"   |


# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).


Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

### LEGEND


- 0.1 fc
- 0.5 fc
- 1.0 fc




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.




Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.




Test No. LT.L23271 tested in accordance with IESNA LM-79-08.




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.




Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.




Test No. LT.L23271 tested in accordance with IESNA LM-79-08.




Test No. LT.L23211 tested in accordance with IESNA LM-79-08.




Test No. LT.L23164B tested in accordance with IESNA LM-79-08.




Test No. LT.L23222 tested in accordance with IESNA LM-79-08.



Test No. LT.L23271 tested in accordance with IESNA LM-79-08.



Test No. LT.L23211 tested in accordance with IESNA LM-79-08.



Test No. LT.L23164B tested in accordance with IESNA LM-79-08.

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.04             |
| 5°C         | 41°F        | 1.04             |
| 10°C        | 50°F        | 1.03             |
| 15°C        | 59°F        | 1.02             |
| 20°C        | 68°F        | 1.01             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 0.99             |
| 35°C        | 95°F        | 0.98             |
| 40°C        | 104°F       | 0.97             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | Lumen Maintenance Factor |
|-----------------|--------------------------|
| 0               | 1.00                     |
| 25,000          | 0.96                     |
| 50,000          | 0.92                     |
| 100,000         | 0.85                     |

#### Motion Sensor Default Settings

| Option                 | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|------------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| PIR or PIRH            | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| *PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use when motion sensor is used as dusk to dawn control.

### Electrical Load

|                                      | Performance Package | LED Count | Drive Current | Wattage | Current (A) |      |      |      |      |      |
|--------------------------------------|---------------------|-----------|---------------|---------|-------------|------|------|------|------|------|
|                                      |                     |           |               |         | 120         | 208  | 240  | 277  | 347  | 480  |
| Forward Optics (Non-Rotated)         | P1                  | 30        | 530           | 54      | 0.45        | 0.26 | 0.23 | 0.19 | 0.10 | 0.12 |
|                                      | P2                  | 30        | 700           | 70      | 0.59        | 0.34 | 0.30 | 0.25 | 0.20 | 0.16 |
|                                      | P3                  | 30        | 1050          | 102     | 0.86        | 0.50 | 0.44 | 0.38 | 0.30 | 0.22 |
|                                      | P4                  | 30        | 1250          | 125     | 1.06        | 0.60 | 0.52 | 0.46 | 0.37 | 0.27 |
|                                      | P5                  | 30        | 1400          | 138     | 1.16        | 0.67 | 0.58 | 0.51 | 0.40 | 0.29 |
|                                      | P6                  | 40        | 1250          | 163     | 1.36        | 0.78 | 0.68 | 0.59 | 0.47 | 0.34 |
|                                      | P7                  | 40        | 1400          | 183     | 1.53        | 0.88 | 0.76 | 0.66 | 0.53 | 0.38 |
|                                      | P8                  | 60        | 1050          | 207     | 1.74        | 0.98 | 0.87 | 0.76 | 0.64 | 0.49 |
|                                      | P9                  | 60        | 1250          | 241     | 2.01        | 1.16 | 1.01 | 0.89 | 0.70 | 0.51 |
| Rotated Optics (Requires L90 or R90) | P10                 | 60        | 530           | 106     | 0.90        | 0.52 | 0.47 | 0.43 | 0.33 | 0.27 |
|                                      | P11                 | 60        | 700           | 137     | 1.15        | 0.67 | 0.60 | 0.53 | 0.42 | 0.32 |
|                                      | P12                 | 60        | 1050          | 207     | 1.74        | 0.99 | 0.87 | 0.76 | 0.60 | 0.46 |
|                                      | P13                 | 60        | 1250          | 231     | 1.93        | 1.12 | 0.97 | 0.86 | 0.67 | 0.49 |

#### Controls Options

| Nomenclature  | Description   | Functionality   | Primary control device  | Notes  |
|---------------|---|---|---|--|
| FA0           | Field adjustable output device installed inside the luminaire; wired to the driver dimming leads. | Allows the luminaire to be manually dimmed, effectively trimming the light output.  | FA0 device  | Cannot be used with other controls options that need the 0-10V leads                                 |
| DS            | Drivers wired independently for 50/50 luminaire operation   | The luminaire is wired to two separate circuits, allowing for 50/50 operation.  | Independently wired drivers   | Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative. |
| PERS or PER7  | Twist-lock photocell receptacle   | Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.              | Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM. | Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire                        |
| PIR or PIRH   | Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting          | Luminaires dim when no occupancy is detected.   | Acuity Controls SBOR  | Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.          |
| NLTAIR2 PIRHN | nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.            | Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse. | nLight Air rSDGR  | nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.    |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 30             | 530           | P1            | 54W          | T1S        | 6,457                | 2 | 0 | 2 | 120 | 6,956                | 2 | 0 | 2 | 129 | 7,044                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2S        | 6,450                | 2 | 0 | 2 | 119 | 6,949                | 2 | 0 | 2 | 129 | 7,037                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2M        | 6,483                | 1 | 0 | 1 | 120 | 6,984                | 2 | 0 | 2 | 129 | 7,073                | 2 | 0 | 2 | 131 |
|                |               |               |              | T3S        | 6,279                | 2 | 0 | 2 | 116 | 6,764                | 2 | 0 | 2 | 125 | 6,850                | 2 | 0 | 2 | 127 |
|                |               |               |              | T3M        | 6,468                | 1 | 0 | 2 | 120 | 6,967                | 1 | 0 | 2 | 129 | 7,056                | 1 | 0 | 2 | 131 |
|                |               |               |              | T4M        | 6,327                | 1 | 0 | 2 | 117 | 6,816                | 1 | 0 | 2 | 126 | 6,902                | 1 | 0 | 2 | 128 |
|                |               |               |              | TFTM       | 6,464                | 1 | 0 | 2 | 120 | 6,963                | 1 | 0 | 2 | 129 | 7,051                | 1 | 0 | 2 | 131 |
|                |               |               |              | TSVS       | 6,722                | 2 | 0 | 0 | 124 | 7,242                | 3 | 0 | 0 | 134 | 7,334                | 3 | 0 | 0 | 136 |
|                |               |               |              | T5S        | 6,728                | 2 | 0 | 1 | 125 | 7,248                | 2 | 0 | 1 | 134 | 7,340                | 2 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 6,711                | 3 | 0 | 1 | 124 | 7,229                | 3 | 0 | 1 | 134 | 7,321                | 3 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 6,667                | 3 | 0 | 2 | 123 | 7,182                | 3 | 0 | 2 | 133 | 7,273                | 3 | 0 | 2 | 135 |
|                |               |               |              | BLC        | 5,299                | 1 | 0 | 1 | 98  | 5,709                | 1 | 0 | 2 | 106 | 5,781                | 1 | 0 | 2 | 107 |
|                |               |               |              | LCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
|                |               |               |              | RCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
| 30             | 700           | P2            | 70W          | T1S        | 8,249                | 2 | 0 | 2 | 118 | 8,886                | 2 | 0 | 2 | 127 | 8,999                | 2 | 0 | 2 | 129 |
|                |               |               |              | T2S        | 8,240                | 2 | 0 | 2 | 118 | 8,877                | 2 | 0 | 2 | 127 | 8,989                | 2 | 0 | 2 | 128 |
|                |               |               |              | T2M        | 8,283                | 2 | 0 | 2 | 118 | 8,923                | 2 | 0 | 2 | 127 | 9,036                | 2 | 0 | 2 | 129 |
|                |               |               |              | T3S        | 8,021                | 2 | 0 | 2 | 115 | 8,641                | 2 | 0 | 2 | 123 | 8,751                | 2 | 0 | 2 | 125 |
|                |               |               |              | T3M        | 8,263                | 2 | 0 | 2 | 118 | 8,901                | 2 | 0 | 2 | 127 | 9,014                | 2 | 0 | 2 | 129 |
|                |               |               |              | T4M        | 8,083                | 2 | 0 | 2 | 115 | 8,708                | 2 | 0 | 2 | 124 | 8,818                | 2 | 0 | 2 | 126 |
|                |               |               |              | TFTM       | 8,257                | 2 | 0 | 2 | 118 | 8,896                | 2 | 0 | 2 | 127 | 9,008                | 2 | 0 | 2 | 129 |
|                |               |               |              | TSVS       | 8,588                | 3 | 0 | 0 | 123 | 9,252                | 3 | 0 | 0 | 132 | 9,369                | 3 | 0 | 0 | 134 |
|                |               |               |              | T5S        | 8,595                | 3 | 0 | 1 | 123 | 9,259                | 3 | 0 | 1 | 132 | 9,376                | 3 | 0 | 1 | 134 |
|                |               |               |              | T5M        | 8,573                | 3 | 0 | 2 | 122 | 9,236                | 3 | 0 | 2 | 132 | 9,353                | 3 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 8,517                | 3 | 0 | 2 | 122 | 9,175                | 4 | 0 | 2 | 131 | 9,291                | 4 | 0 | 2 | 133 |
|                |               |               |              | BLC        | 6,770                | 1 | 0 | 2 | 97  | 7,293                | 1 | 0 | 2 | 104 | 7,386                | 1 | 0 | 2 | 106 |
|                |               |               |              | LCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
|                |               |               |              | RCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
| 30             | 1050          | P3            | 102W         | T1S        | 11,661               | 2 | 0 | 2 | 114 | 12,562               | 3 | 0 | 3 | 123 | 12,721               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2S        | 11,648               | 2 | 0 | 2 | 114 | 12,548               | 3 | 0 | 3 | 123 | 12,707               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2M        | 11,708               | 2 | 0 | 2 | 115 | 12,613               | 2 | 0 | 2 | 124 | 12,773               | 2 | 0 | 2 | 125 |
|                |               |               |              | T3S        | 11,339               | 2 | 0 | 2 | 111 | 12,215               | 3 | 0 | 3 | 120 | 12,370               | 3 | 0 | 3 | 121 |
|                |               |               |              | T3M        | 11,680               | 2 | 0 | 2 | 115 | 12,582               | 2 | 0 | 2 | 123 | 12,742               | 2 | 0 | 2 | 125 |
|                |               |               |              | T4M        | 11,426               | 2 | 0 | 3 | 112 | 12,309               | 2 | 0 | 3 | 121 | 12,465               | 2 | 0 | 3 | 122 |
|                |               |               |              | TFTM       | 11,673               | 2 | 0 | 2 | 114 | 12,575               | 2 | 0 | 3 | 123 | 12,734               | 2 | 0 | 3 | 125 |
|                |               |               |              | TSVS       | 12,140               | 3 | 0 | 1 | 119 | 13,078               | 3 | 0 | 1 | 128 | 13,244               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5S        | 12,150               | 3 | 0 | 1 | 119 | 13,089               | 3 | 0 | 1 | 128 | 13,254               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5M        | 12,119               | 4 | 0 | 2 | 119 | 13,056               | 4 | 0 | 2 | 128 | 13,221               | 4 | 0 | 2 | 130 |
|                |               |               |              | TSW        | 12,040               | 4 | 0 | 3 | 118 | 12,970               | 4 | 0 | 3 | 127 | 13,134               | 4 | 0 | 3 | 129 |
|                |               |               |              | BLC        | 9,570                | 1 | 0 | 2 | 94  | 10,310               | 1 | 0 | 2 | 101 | 10,440               | 1 | 0 | 2 | 102 |
|                |               |               |              | LCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
|                |               |               |              | RCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
| 30             | 1250          | P4            | 125W         | T1S        | 13,435               | 3 | 0 | 3 | 107 | 14,473               | 3 | 0 | 3 | 116 | 14,657               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2S        | 13,421               | 3 | 0 | 3 | 107 | 14,458               | 3 | 0 | 3 | 116 | 14,641               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2M        | 13,490               | 2 | 0 | 2 | 108 | 14,532               | 3 | 0 | 3 | 116 | 14,716               | 3 | 0 | 3 | 118 |
|                |               |               |              | T3S        | 13,064               | 3 | 0 | 3 | 105 | 14,074               | 3 | 0 | 3 | 113 | 14,252               | 3 | 0 | 3 | 114 |
|                |               |               |              | T3M        | 13,457               | 2 | 0 | 2 | 108 | 14,497               | 2 | 0 | 2 | 116 | 14,681               | 2 | 0 | 2 | 117 |
|                |               |               |              | T4M        | 13,165               | 2 | 0 | 3 | 105 | 14,182               | 2 | 0 | 3 | 113 | 14,362               | 2 | 0 | 3 | 115 |
|                |               |               |              | TFTM       | 13,449               | 2 | 0 | 3 | 108 | 14,488               | 2 | 0 | 3 | 116 | 14,672               | 2 | 0 | 3 | 117 |
|                |               |               |              | TSVS       | 13,987               | 4 | 0 | 1 | 112 | 15,068               | 4 | 0 | 1 | 121 | 15,259               | 4 | 0 | 1 | 122 |
|                |               |               |              | T5S        | 13,999               | 3 | 0 | 1 | 112 | 15,080               | 3 | 0 | 1 | 121 | 15,271               | 3 | 0 | 1 | 122 |
|                |               |               |              | T5M        | 13,963               | 4 | 0 | 2 | 112 | 15,042               | 4 | 0 | 2 | 120 | 15,233               | 4 | 0 | 2 | 122 |
|                |               |               |              | TSW        | 13,872               | 4 | 0 | 3 | 111 | 14,944               | 4 | 0 | 3 | 120 | 15,133               | 4 | 0 | 3 | 121 |
|                |               |               |              | BLC        | 11,027               | 1 | 0 | 2 | 88  | 11,879               | 1 | 0 | 2 | 95  | 12,029               | 1 | 0 | 2 | 96  |
|                |               |               |              | LCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
| 30             | 1400          | P5            | 138W         | T1S        | 14,679               | 3 | 0 | 3 | 106 | 15,814               | 3 | 0 | 3 | 115 | 16,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 14,664               | 3 | 0 | 3 | 106 | 15,797               | 3 | 0 | 3 | 114 | 15,997               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2M        | 14,739               | 3 | 0 | 3 | 107 | 15,878               | 3 | 0 | 3 | 115 | 16,079               | 3 | 0 | 3 | 117 |
|                |               |               |              | T3S        | 14,274               | 3 | 0 | 3 | 103 | 15,377               | 3 | 0 | 3 | 111 | 15,572               | 3 | 0 | 3 | 113 |
|                |               |               |              | T3M        | 14,704               | 2 | 0 | 3 | 107 | 15,840               | 3 | 0 | 3 | 115 | 16,040               | 3 | 0 | 3 | 116 |
|                |               |               |              | T4M        | 14,384               | 2 | 0 | 3 | 104 | 15,496               | 3 | 0 | 3 | 112 | 15,692               | 3 | 0 | 3 | 114 |
|                |               |               |              | TFTM       | 14,695               | 2 | 0 | 3 | 106 | 15,830               | 3 | 0 | 3 | 115 | 16,030               | 3 | 0 | 3 | 116 |
|                |               |               |              | TSVS       | 15,283               | 4 | 0 | 1 | 111 | 16,464               | 4 | 0 | 1 | 119 | 16,672               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 15,295               | 3 | 0 | 1 | 111 | 16,477               | 4 | 0 | 1 | 119 | 16,686               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5M        | 15,257               | 4 | 0 | 2 | 111 | 16,435               | 4 | 0 | 2 | 119 | 16,644               | 4 | 0 | 2 | 121 |
|                |               |               |              | TSW        | 15,157               | 4 | 0 | 3 | 110 | 16,328               | 4 | 0 | 3 | 118 | 16,534               | 4 | 0 | 3 | 120 |
|                |               |               |              | BLC        | 12,048               | 1 | 0 | 2 | 87  | 12,979               | 1 | 0 | 2 | 94  | 13,143               | 1 | 0 | 2 | 95  |
|                |               |               |              | LCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |
|                |               |               |              | RCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 40             | 1250          | P6            | 163W         | T1S        | 17,654               | 3 | 0 | 3 | 108 | 19,018               | 3 | 0 | 3 | 117 | 19,259               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2S        | 17,635               | 3 | 0 | 3 | 108 | 18,998               | 3 | 0 | 3 | 117 | 19,238               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2M        | 17,726               | 3 | 0 | 3 | 109 | 19,096               | 3 | 0 | 3 | 117 | 19,337               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 17,167               | 3 | 0 | 3 | 105 | 18,493               | 3 | 0 | 3 | 113 | 18,727               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3M        | 17,683               | 3 | 0 | 3 | 108 | 19,049               | 3 | 0 | 3 | 117 | 19,290               | 3 | 0 | 3 | 118 |
|                |               |               |              | T4M        | 17,299               | 3 | 0 | 3 | 106 | 18,635               | 3 | 0 | 4 | 114 | 18,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 17,672               | 3 | 0 | 3 | 108 | 19,038               | 3 | 0 | 4 | 117 | 19,279               | 3 | 0 | 4 | 118 |
|                |               |               |              | TSVS       | 18,379               | 4 | 0 | 1 | 113 | 19,800               | 4 | 0 | 1 | 121 | 20,050               | 4 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 18,394               | 4 | 0 | 2 | 113 | 19,816               | 4 | 0 | 2 | 122 | 20,066               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 18,348               | 4 | 0 | 2 | 113 | 19,766               | 4 | 0 | 2 | 121 | 20,016               | 4 | 0 | 2 | 123 |
|                |               |               |              | TSW        | 18,228               | 5 | 0 | 3 | 112 | 19,636               | 5 | 0 | 3 | 120 | 19,885               | 5 | 0 | 3 | 122 |
|                |               |               |              | BLC        | 14,489               | 2 | 0 | 2 | 89  | 15,609               | 2 | 0 | 3 | 96  | 15,806               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
| 40             | 1400          | P7            | 183W         | T1S        | 19,227               | 3 | 0 | 3 | 105 | 20,712               | 3 | 0 | 3 | 113 | 20,975               | 3 | 0 | 3 | 115 |
|                |               |               |              | T2S        | 19,206               | 3 | 0 | 3 | 105 | 20,690               | 3 | 0 | 3 | 113 | 20,952               | 3 | 0 | 3 | 114 |
|                |               |               |              | T2M        | 19,305               | 3 | 0 | 3 | 105 | 20,797               | 3 | 0 | 3 | 114 | 21,060               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3S        | 18,696               | 3 | 0 | 3 | 102 | 20,141               | 3 | 0 | 3 | 110 | 20,396               | 3 | 0 | 4 | 111 |
|                |               |               |              | T3M        | 19,258               | 3 | 0 | 3 | 105 | 20,746               | 3 | 0 | 3 | 113 | 21,009               | 3 | 0 | 3 | 115 |
|                |               |               |              | T4M        | 18,840               | 3 | 0 | 4 | 103 | 20,296               | 3 | 0 | 4 | 111 | 20,553               | 3 | 0 | 4 | 112 |
|                |               |               |              | TFTM       | 19,246               | 3 | 0 | 4 | 105 | 20,734               | 3 | 0 | 4 | 113 | 20,996               | 3 | 0 | 4 | 115 |
|                |               |               |              | TSVS       | 20,017               | 4 | 0 | 1 | 109 | 21,564               | 4 | 0 | 1 | 118 | 21,837               | 4 | 0 | 1 | 119 |
|                |               |               |              | T5S        | 20,033               | 4 | 0 | 2 | 109 | 21,581               | 4 | 0 | 2 | 118 | 21,854               | 4 | 0 | 2 | 119 |
|                |               |               |              | T5M        | 19,983               | 4 | 0 | 2 | 109 | 21,527               | 5 | 0 | 3 | 118 | 21,799               | 5 | 0 | 3 | 119 |
|                |               |               |              | TSW        | 19,852               | 5 | 0 | 3 | 108 | 21,386               | 5 | 0 | 3 | 117 | 21,656               | 5 | 0 | 3 | 118 |
|                |               |               |              | BLC        | 15,780               | 2 | 0 | 3 | 86  | 16,999               | 2 | 0 | 3 | 93  | 17,214               | 2 | 0 | 3 | 94  |
|                |               |               |              | LCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
|                |               |               |              | RCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
| 60             | 1050          | P8            | 207W         | T1S        | 22,490               | 3 | 0 | 3 | 109 | 24,228               | 3 | 0 | 3 | 117 | 24,535               | 3 | 0 | 3 | 119 |
|                |               |               |              | T2S        | 22,466               | 3 | 0 | 4 | 109 | 24,202               | 3 | 0 | 4 | 117 | 24,509               | 3 | 0 | 4 | 118 |
|                |               |               |              | T2M        | 22,582               | 3 | 0 | 3 | 109 | 24,327               | 3 | 0 | 3 | 118 | 24,635               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 21,870               | 3 | 0 | 4 | 106 | 23,560               | 3 | 0 | 4 | 114 | 23,858               | 3 | 0 | 4 | 115 |
|                |               |               |              | T3M        | 22,527               | 3 | 0 | 4 | 109 | 24,268               | 3 | 0 | 4 | 117 | 24,575               | 3 | 0 | 4 | 119 |
|                |               |               |              | T4M        | 22,038               | 3 | 0 | 4 | 106 | 23,741               | 3 | 0 | 4 | 115 | 24,041               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 22,513               | 3 | 0 | 4 | 109 | 24,253               | 3 | 0 | 4 | 117 | 24,560               | 3 | 0 | 4 | 119 |
|                |               |               |              | TSVS       | 23,415               | 5 | 0 | 1 | 113 | 25,224               | 5 | 0 | 1 | 122 | 25,543               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 23,434               | 4 | 0 | 2 | 113 | 25,244               | 4 | 0 | 2 | 122 | 25,564               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,221               | 5 | 0 | 4 | 112 | 25,016               | 5 | 0 | 4 | 121 | 25,332               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 18,458               | 2 | 0 | 3 | 89  | 19,885               | 2 | 0 | 3 | 96  | 20,136               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
| 60             | 1250          | P9            | 241W         | T1S        | 25,575               | 3 | 0 | 3 | 106 | 27,551               | 3 | 0 | 3 | 114 | 27,900               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 25,548               | 3 | 0 | 4 | 106 | 27,522               | 3 | 0 | 4 | 114 | 27,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | T2M        | 25,680               | 3 | 0 | 3 | 107 | 27,664               | 3 | 0 | 3 | 115 | 28,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T3S        | 24,870               | 3 | 0 | 4 | 103 | 26,791               | 3 | 0 | 4 | 111 | 27,130               | 3 | 0 | 4 | 113 |
|                |               |               |              | T3M        | 25,617               | 3 | 0 | 4 | 106 | 27,597               | 3 | 0 | 4 | 115 | 27,946               | 3 | 0 | 4 | 116 |
|                |               |               |              | T4M        | 25,061               | 3 | 0 | 4 | 104 | 26,997               | 3 | 0 | 4 | 112 | 27,339               | 3 | 0 | 4 | 113 |
|                |               |               |              | TFTM       | 25,602               | 3 | 0 | 4 | 106 | 27,580               | 3 | 0 | 4 | 114 | 27,929               | 3 | 0 | 4 | 116 |
|                |               |               |              | TSVS       | 26,626               | 5 | 0 | 1 | 110 | 28,684               | 5 | 0 | 1 | 119 | 29,047               | 5 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 26,648               | 4 | 0 | 2 | 111 | 28,707               | 5 | 0 | 2 | 119 | 29,070               | 5 | 0 | 2 | 121 |
|                |               |               |              | T5M        | 26,581               | 5 | 0 | 3 | 110 | 28,635               | 5 | 0 | 3 | 119 | 28,997               | 5 | 0 | 3 | 120 |
|                |               |               |              | TSW        | 26,406               | 5 | 0 | 4 | 110 | 28,447               | 5 | 0 | 4 | 118 | 28,807               | 5 | 0 | 4 | 120 |
|                |               |               |              | BLC        | 20,990               | 2 | 0 | 3 | 87  | 22,612               | 2 | 0 | 3 | 94  | 22,898               | 2 | 0 | 3 | 95  |
|                |               |               |              | LCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |
|                |               |               |              | RCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Rotated Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 60             | 530           | P10           | 106W         | T1S        | 13,042               | 3 | 0 | 3 | 123 | 14,050               | 3 | 0 | 3 | 133 | 14,228               | 3 | 0 | 3 | 134 |
|                |               |               |              | T2S        | 12,967               | 4 | 0 | 4 | 122 | 13,969               | 4 | 0 | 4 | 132 | 14,146               | 4 | 0 | 4 | 133 |
|                |               |               |              | T2M        | 13,201               | 3 | 0 | 3 | 125 | 14,221               | 3 | 0 | 3 | 134 | 14,401               | 3 | 0 | 3 | 136 |
|                |               |               |              | T3S        | 12,766               | 4 | 0 | 4 | 120 | 13,752               | 4 | 0 | 4 | 130 | 13,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | T3M        | 13,193               | 4 | 0 | 4 | 124 | 14,213               | 4 | 0 | 4 | 134 | 14,393               | 4 | 0 | 4 | 136 |
|                |               |               |              | T4M        | 12,944               | 4 | 0 | 4 | 122 | 13,945               | 4 | 0 | 4 | 132 | 14,121               | 4 | 0 | 4 | 133 |
|                |               |               |              | TFTM       | 13,279               | 4 | 0 | 4 | 125 | 14,305               | 4 | 0 | 4 | 135 | 14,486               | 4 | 0 | 4 | 137 |
|                |               |               |              | TSVS       | 13,372               | 3 | 0 | 1 | 126 | 14,405               | 4 | 0 | 1 | 136 | 14,588               | 4 | 0 | 1 | 138 |
|                |               |               |              | T5S        | 13,260               | 3 | 0 | 1 | 125 | 14,284               | 3 | 0 | 1 | 135 | 14,465               | 3 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 13,256               | 4 | 0 | 2 | 125 | 14,281               | 4 | 0 | 2 | 135 | 14,462               | 4 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 13,137               | 4 | 0 | 3 | 124 | 14,153               | 4 | 0 | 3 | 134 | 14,332               | 4 | 0 | 3 | 135 |
|                |               |               |              | BLC        | 10,906               | 3 | 0 | 3 | 103 | 11,749               | 3 | 0 | 3 | 111 | 11,898               | 3 | 0 | 3 | 112 |
|                |               |               |              | LCCO       | 7,789                | 1 | 0 | 3 | 73  | 8,391                | 1 | 0 | 3 | 79  | 8,497                | 1 | 0 | 3 | 80  |
|                |               |               |              | RCCO       | 7,779                | 4 | 0 | 4 | 73  | 8,380                | 4 | 0 | 4 | 79  | 8,486                | 4 | 0 | 4 | 80  |
| 60             | 700           | P11           | 137W         | T1S        | 16,556               | 3 | 0 | 3 | 121 | 17,835               | 3 | 0 | 3 | 130 | 18,061               | 4 | 0 | 4 | 132 |
|                |               |               |              | T2S        | 16,461               | 4 | 0 | 4 | 120 | 17,733               | 4 | 0 | 4 | 129 | 17,957               | 4 | 0 | 4 | 131 |
|                |               |               |              | T2M        | 16,758               | 4 | 0 | 4 | 122 | 18,053               | 4 | 0 | 4 | 132 | 18,281               | 4 | 0 | 4 | 133 |
|                |               |               |              | T3S        | 16,205               | 4 | 0 | 4 | 118 | 17,457               | 4 | 0 | 4 | 127 | 17,678               | 4 | 0 | 4 | 129 |
|                |               |               |              | T3M        | 16,748               | 4 | 0 | 4 | 122 | 18,042               | 4 | 0 | 4 | 132 | 18,271               | 4 | 0 | 4 | 133 |
|                |               |               |              | T4M        | 16,432               | 4 | 0 | 4 | 120 | 17,702               | 4 | 0 | 4 | 129 | 17,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | TFTM       | 16,857               | 4 | 0 | 4 | 123 | 18,159               | 4 | 0 | 4 | 133 | 18,389               | 4 | 0 | 4 | 134 |
|                |               |               |              | TSVS       | 16,975               | 4 | 0 | 1 | 124 | 18,287               | 4 | 0 | 1 | 133 | 18,518               | 4 | 0 | 1 | 135 |
|                |               |               |              | T5S        | 16,832               | 4 | 0 | 1 | 123 | 18,133               | 4 | 0 | 2 | 132 | 18,362               | 4 | 0 | 2 | 134 |
|                |               |               |              | T5M        | 16,828               | 4 | 0 | 2 | 123 | 18,128               | 4 | 0 | 2 | 132 | 18,358               | 4 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 16,677               | 4 | 0 | 3 | 122 | 17,966               | 5 | 0 | 3 | 131 | 18,193               | 5 | 0 | 3 | 133 |
|                |               |               |              | BLC        | 13,845               | 3 | 0 | 3 | 101 | 14,915               | 3 | 0 | 3 | 109 | 15,103               | 3 | 0 | 3 | 110 |
|                |               |               |              | LCCO       | 9,888                | 1 | 0 | 3 | 72  | 10,652               | 2 | 0 | 3 | 78  | 10,787               | 2 | 0 | 3 | 79  |
|                |               |               |              | RCCO       | 9,875                | 4 | 0 | 4 | 72  | 10,638               | 4 | 0 | 4 | 78  | 10,773               | 4 | 0 | 4 | 79  |
| 60             | 1050          | P12           | 207W         | T1S        | 22,996               | 4 | 0 | 4 | 111 | 24,773               | 4 | 0 | 4 | 120 | 25,087               | 4 | 0 | 4 | 121 |
|                |               |               |              | T2S        | 22,864               | 4 | 0 | 4 | 110 | 24,631               | 5 | 0 | 5 | 119 | 24,943               | 5 | 0 | 5 | 120 |
|                |               |               |              | T2M        | 23,277               | 4 | 0 | 4 | 112 | 25,075               | 4 | 0 | 4 | 121 | 25,393               | 4 | 0 | 4 | 123 |
|                |               |               |              | T3S        | 22,509               | 4 | 0 | 4 | 109 | 24,248               | 5 | 0 | 5 | 117 | 24,555               | 5 | 0 | 5 | 119 |
|                |               |               |              | T3M        | 23,263               | 4 | 0 | 4 | 112 | 25,061               | 4 | 0 | 4 | 121 | 25,378               | 4 | 0 | 4 | 123 |
|                |               |               |              | T4M        | 22,824               | 5 | 0 | 5 | 110 | 24,588               | 5 | 0 | 5 | 119 | 24,899               | 5 | 0 | 5 | 120 |
|                |               |               |              | TFTM       | 23,414               | 5 | 0 | 5 | 113 | 25,223               | 5 | 0 | 5 | 122 | 25,543               | 5 | 0 | 5 | 123 |
|                |               |               |              | TSVS       | 23,579               | 5 | 0 | 1 | 114 | 25,401               | 5 | 0 | 1 | 123 | 25,722               | 5 | 0 | 1 | 124 |
|                |               |               |              | T5S        | 23,380               | 4 | 0 | 2 | 113 | 25,187               | 4 | 0 | 2 | 122 | 25,506               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,165               | 5 | 0 | 4 | 112 | 24,955               | 5 | 0 | 4 | 121 | 25,271               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 19,231               | 4 | 0 | 4 | 93  | 20,717               | 4 | 0 | 4 | 100 | 20,979               | 4 | 0 | 4 | 101 |
|                |               |               |              | LCCO       | 13,734               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,716               | 4 | 0 | 4 | 66  | 14,776               | 4 | 0 | 4 | 71  | 14,963               | 4 | 0 | 4 | 72  |
| 60             | 1250          | P13           | 231W         | T1S        | 25,400               | 4 | 0 | 4 | 110 | 27,363               | 4 | 0 | 4 | 118 | 27,709               | 4 | 0 | 4 | 120 |
|                |               |               |              | T2S        | 25,254               | 5 | 0 | 5 | 109 | 27,205               | 5 | 0 | 5 | 118 | 27,550               | 5 | 0 | 5 | 119 |
|                |               |               |              | T2M        | 25,710               | 4 | 0 | 4 | 111 | 27,696               | 4 | 0 | 4 | 120 | 28,047               | 4 | 0 | 4 | 121 |
|                |               |               |              | T3S        | 24,862               | 5 | 0 | 5 | 108 | 26,783               | 5 | 0 | 5 | 116 | 27,122               | 5 | 0 | 5 | 117 |
|                |               |               |              | T3M        | 25,695               | 5 | 0 | 5 | 111 | 27,680               | 5 | 0 | 5 | 120 | 28,031               | 5 | 0 | 5 | 121 |
|                |               |               |              | T4M        | 25,210               | 5 | 0 | 5 | 109 | 27,158               | 5 | 0 | 5 | 118 | 27,502               | 5 | 0 | 5 | 119 |
|                |               |               |              | TFTM       | 25,861               | 5 | 0 | 5 | 112 | 27,860               | 5 | 0 | 5 | 121 | 28,212               | 5 | 0 | 5 | 122 |
|                |               |               |              | TSVS       | 26,043               | 5 | 0 | 1 | 113 | 28,056               | 5 | 0 | 1 | 121 | 28,411               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 25,824               | 4 | 0 | 2 | 112 | 27,819               | 5 | 0 | 2 | 120 | 28,172               | 5 | 0 | 2 | 122 |
|                |               |               |              | T5M        | 25,818               | 5 | 0 | 3 | 112 | 27,813               | 5 | 0 | 3 | 120 | 28,165               | 5 | 0 | 3 | 122 |
|                |               |               |              | TSW        | 25,586               | 5 | 0 | 4 | 111 | 27,563               | 5 | 0 | 4 | 119 | 27,912               | 5 | 0 | 4 | 121 |
|                |               |               |              | BLC        | 21,241               | 4 | 0 | 4 | 92  | 22,882               | 4 | 0 | 4 | 99  | 23,172               | 4 | 0 | 4 | 100 |
|                |               |               |              | LCCO       | 15,170               | 2 | 0 | 4 | 66  | 16,342               | 2 | 0 | 4 | 71  | 16,549               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 15,150               | 5 | 0 | 5 | 66  | 16,321               | 5 | 0 | 5 | 71  | 16,527               | 5 | 0 | 5 | 72  |



## Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

### LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product.

Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.





# D-Series Size 1 LED Area Luminaire

d#series




|                |
|----------------|
| Catalog Number |
| Notes          |
| Type           |

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

|                      |  |
|----------------------|--|
| <b>EPA:</b>          | 1.01 ft <sup>2</sup><br>(0.09 m <sup>2</sup> ) |
| <b>Length:</b>       | 33"<br>(83.8 cm)                               |
| <b>Width:</b>        | 13"<br>(33.0 cm)                               |
| <b>Height H1:</b>    | 7-1/2"<br>(19.0 cm)                            |
| <b>Height H2:</b>    | 3-1/2"   |
| <b>Weight (max):</b> | 27 lbs<br>(12.2 kg)                            |

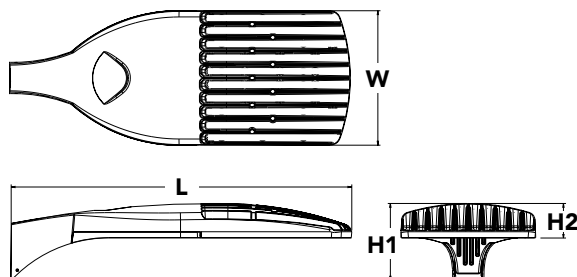

## Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

A+ Capable options indicated by this color background.

## Ordering Information

EXAMPLE: DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

| DSX1 LED        |   |                          |                                   |  |   |  |  |
|-----------------|---|--------------------------|-----------------------------------|--|---|--|--|
| Series          | LEDs  | Color temperature        |                                   | Distribution   |   | Voltage  | Mounting   |
| <b>DSX1 LED</b> | <b>Forward optics</b><br>P1 <b>P4</b> P7<br>P2 P5 P8<br>P3 P6 P9<br><b>Rotated optics</b><br>P10 <sup>1</sup> P12 <sup>1</sup><br>P11 <sup>1</sup> P13 <sup>1</sup> | 30K<br>40K<br><b>50K</b> | 3000 K<br>4000 K<br><b>5000 K</b> | T1S Type I short<br>T2S Type II short<br>T2M Type II medium<br><b>T3S</b> Type III short<br>T3M Type III medium<br>T4M Type IV medium<br>TFTM Forward throw medium | T5VS Type V very short<br>T5S Type V short<br>T5M Type V medium<br>T5W Type V wide<br>BLC Backlight control <sup>2</sup><br>LCCO Left corner cutoff <sup>2</sup><br>RCCO Right corner cutoff <sup>2</sup> | <b>MVOLT<sup>3</sup></b><br>120 <sup>4</sup><br>208 <sup>4</sup><br>240 <sup>4</sup><br>277 <sup>4</sup><br>347 <sup>4,5</sup><br>480 <sup>4,5</sup> | <b>Shipped included</b><br><b>SPA</b> <b>Square pole mounting</b><br>RPA Round pole mounting<br>WBA Wall bracket<br>SPUMBA Square pole universal mounting adaptor <sup>6</sup><br>RPUMBA Round pole universal mounting adaptor <sup>6</sup><br><b>Shipped separately</b><br>KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) <sup>7</sup> |

| Control options  | Other options   | Finish (required)   |
|--|---|---|
| <b>Shipped installed</b><br>NLTAIR2 nLight AIR generation 2 enabled <sup>8</sup><br>PIRHN Network, high/low motion/ambient sensor <sup>9</sup><br>PER NEMA twist-lock receptacle only (controls ordered separate) <sup>10</sup><br>PER5 Five-pin receptacle only (controls ordered separate) <sup>10,11</sup><br>PER7 Seven-pin receptacle only (controls ordered separate) <sup>10,11</sup><br>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>12</sup><br>DS Dual switching <sup>12,13,14</sup> | PIR High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup><br>PIRH High/low, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc <sup>15,16</sup><br>PIR1FC3V High/low, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup><br>PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc <sup>15,16</sup><br>FAO Field adjustable output <sup>14</sup> | <b>Shipped installed</b><br>HS House-side shield <sup>17</sup><br>SF Single fuse (120, 277, 347V) <sup>4</sup><br>DF Double fuse (208, 240, 480V) <sup>4</sup><br>L90 Left rotated optics <sup>1</sup><br>R90 Right rotated optics <sup>1</sup><br><b>Shipped separately</b><br>BS Bird spikes <sup>18</sup><br>EGS External glare shield <sup>18</sup> |
|  |   | DDBXD Dark bronze<br>DBLXD Black<br>DNAXD Natural aluminum<br>DWHXD White<br>DDBTXD Textured dark bronze<br>DBLBXD Textured black<br>DNATXD Textured natural aluminum<br>DWHGXD Textured white  |



## Ordering Information

### Accessories

Ordered and shipped separately.

|                    |   |
|--------------------|---|
| DLL127F 1.5 JU     | Photocell - SSL twist-lock (120-277V) <sup>19</sup>                             |
| DLL347F 1.5 CUL JU | Photocell - SSL twist-lock (347V) <sup>19</sup>                                 |
| DLL480F 1.5 CUL JU | Photocell - SSL twist-lock (480V) <sup>19</sup>                                 |
| DSHORT SBK U       | Shorting cap <sup>19</sup>  |
| DSX1HS 30C U       | House-side shield for P1, P2, P3, P4 and P5 <sup>17</sup>                       |
| DSX1HS 40C U       | House-side shield for P6 and P7 <sup>17</sup>                                   |
| DSX1HS 60C U       | House-side shield for P8, P9, P10, P11 and P12 <sup>17</sup>                    |
| PUMBA DDBXD U*     | Square and round pole universal mounting bracket (specify finish) <sup>20</sup> |
| KMA8 DDBXD U       | Mast arm mounting bracket adaptor (specify finish) <sup>6</sup>                 |


For more control options, visit [DTL](#) and [ROAM](#) online.

### NOTES

- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAIR2. For more information on Light Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits with isolated neutral. See Outdoor Control Technical Guide for details.
- Reference Motion Sensor table on page 4.
- Reference controls options table on page 4 to see functionality.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.


## Options

### EGS - External Glare Shield

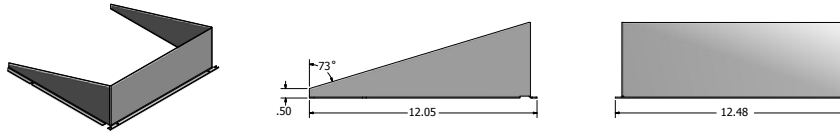

## Drilling

### HANDHOLE ORIENTATION




### Tenon Mounting Slipfitter\*\*

| Tenon O.D. | Mounting | Single Unit | 2 @ 180   | 2 @ 90    | 3 @ 120   | 3 @ 90    | 4 @ 90    |
|------------|----------|-------------|-----------|-----------|-----------|-----------|-----------|
| 2-3/8"     | SPA/RPA  | AS3-5 190   | AS3-5 280 | AS3-5 290 | AS3-5 320 | AS3-5 390 | AS3-5 490 |
|            | SPUMBA   | AS3-5 190   | AS3-5 280 | AS4-5 290 | AS3-5 320 | AS4-5 390 | AS4-5 490 |
|            | RUPUMBA  | AS3-5 190   | AS3-5 280 |           | AS3-5 320 |           |           |
| 2-7/8"     | SPA/RPA  | AST25-190   | AST25-280 | AST25-290 | AST25-320 | AST25-390 | AST25-490 |
|            | SPUMBA   | AST25-190   | AST25-280 |           | AST25-320 |           |           |
|            | RUPUMBA  | AST25-190   | AST25-280 |           | AST25-320 |           |           |
| 4"         | SPA/RPA  | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | SPUMBA   | AST35-190   | AST35-280 | AST35-290 | AST35-320 | AST35-390 | AST35-490 |
|            | RUPUMBA  | AST35-190   | AST35-280 |           | AST35-320 |           |           |

Template #8

Top of Pole

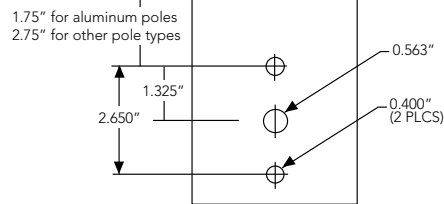


| Mounting Option    | Drilling Template | Single | 2 @ 180    | 2 @ 90     | 3 @ 90        | 3 @ 120         | 4 @ 90           |
|--------------------|-------------------|--------|------------|------------|---------------|-----------------|------------------|
| Head Location      |                   | Side B | Side B & D | Side B & C | Side B, C & D | Round Pole Only | Side A, B, C & D |
| Drill Nomenclature | #8                | DM19AS | DM28AS     | DM29AS     | DM39AS        | DM32AS          | DM49AS           |

|        | Drilling Template | Minimum Acceptable Outside Pole Dimension |        |      |      |      |      |
|--------|-------------------|---|--------|------|------|------|------|
| SPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| RPA    | #8                | 2-7/8"                                    | 2-7/8" | 3.5" | 3.5" | 3"   | 3.5" |
| SPUMBA | #5                | 2-7/8"                                    | 3"     | 4"   | 4"   | 3.5" | 4"   |
| RPUMBA | #5                | 2-7/8"                                    | 3.5"   | 5"   | 5"   | 3.5" | 5"   |

# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

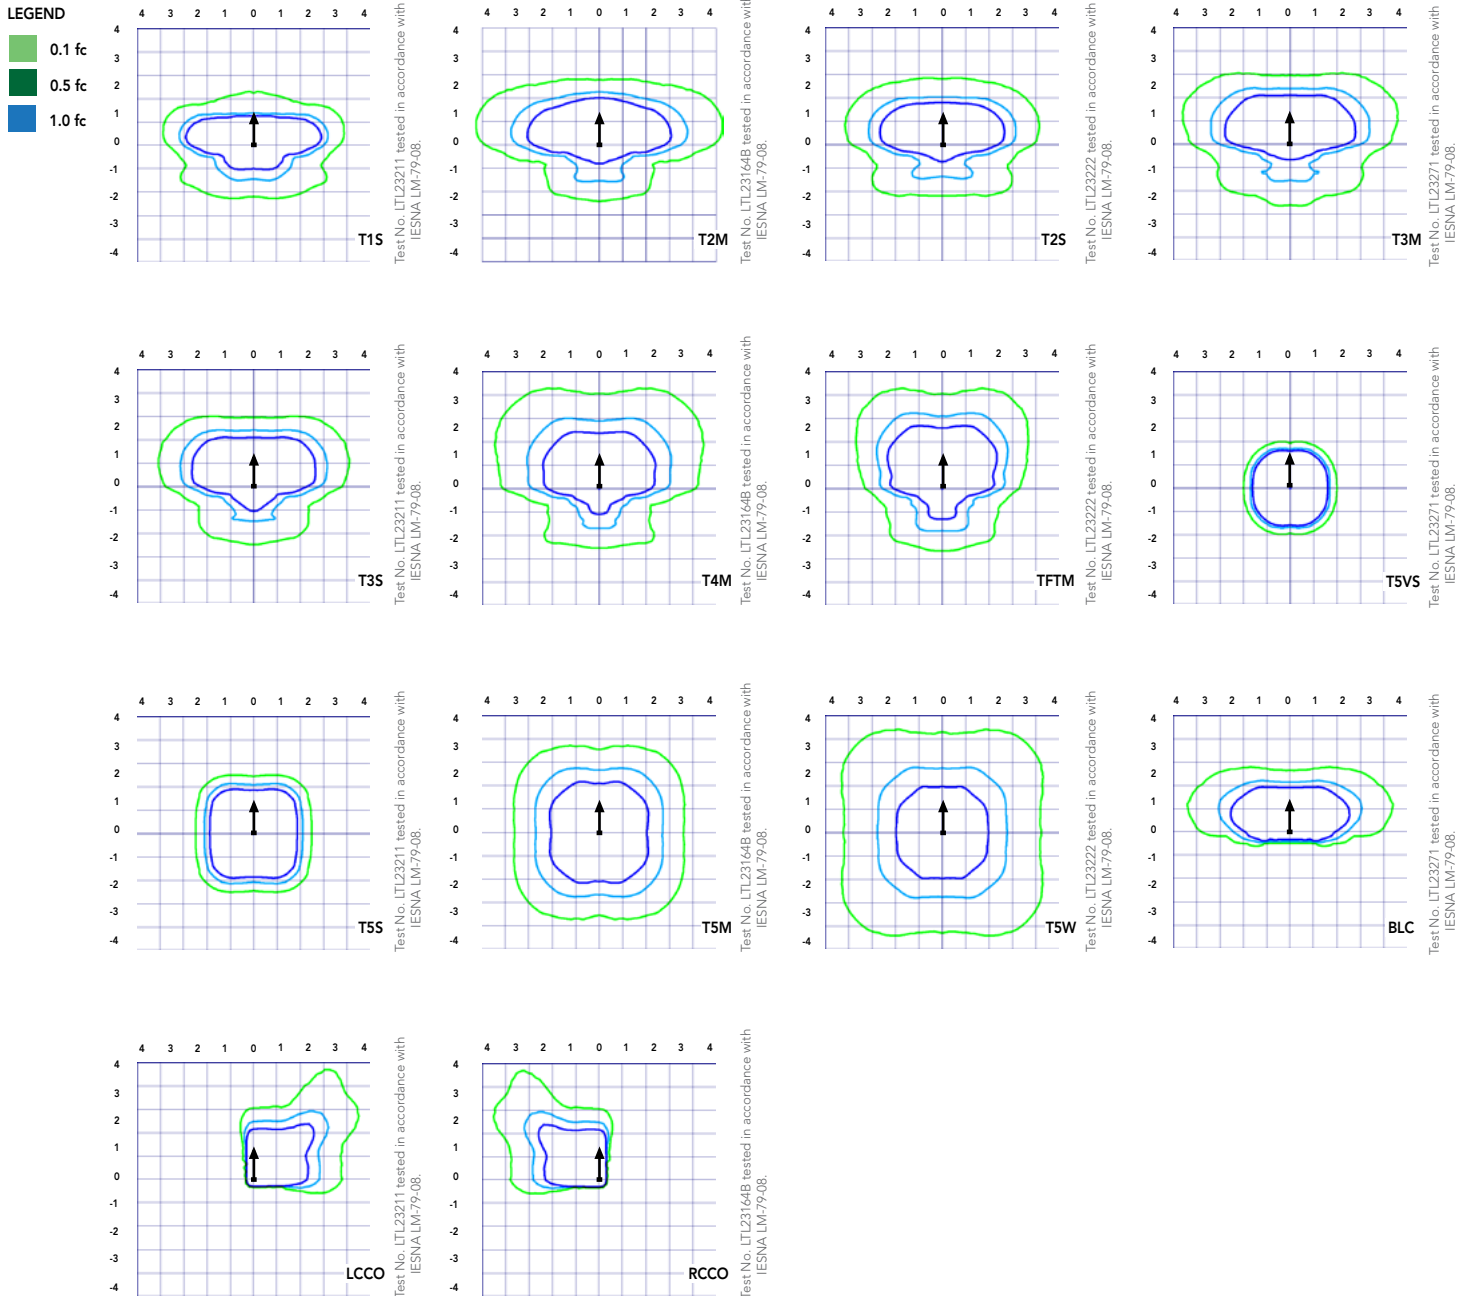

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

| Ambient     |             | Lumen Multiplier |
|-------------|-------------|------------------|
| 0°C         | 32°F        | 1.04             |
| 5°C         | 41°F        | 1.04             |
| 10°C        | 50°F        | 1.03             |
| 15°C        | 59°F        | 1.02             |
| 20°C        | 68°F        | 1.01             |
| <b>25°C</b> | <b>77°F</b> | <b>1.00</b>      |
| 30°C        | 86°F        | 0.99             |
| 35°C        | 95°F        | 0.98             |
| 40°C        | 104°F       | 0.97             |

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

| Operating Hours | Lumen Maintenance Factor |
|-----------------|--------------------------|
| 0               | 1.00                     |
| 25,000          | 0.96                     |
| 50,000          | 0.92                     |
| 100,000         | 0.85                     |

#### Motion Sensor Default Settings

| Option                 | Dimmed State    | High Level (when triggered) | Photocell Operation | Dwell Time | Ramp-up Time | Ramp-down Time |
|------------------------|-----------------|-----------------------------|---------------------|------------|--------------|----------------|
| PIR or PIRH            | 3V (37%) Output | 10V (100%) Output           | Enabled @ 5FC       | 5 min      | 3 sec        | 5 min          |
| *PIR1FC3V or PIRH1FC3V | 3V (37%) Output | 10V (100%) Output           | Enabled @ 1FC       | 5 min      | 3 sec        | 5 min          |

\*for use when motion sensor is used as dusk to dawn control.

### Electrical Load

|                                      | Performance Package | LED Count | Drive Current | Wattage | Current (A) |      |      |      |      |      |
|--------------------------------------|---------------------|-----------|---------------|---------|-------------|------|------|------|------|------|
|                                      |                     |           |               |         | 120         | 208  | 240  | 277  | 347  | 480  |
| Forward Optics (Non-Rotated)         | P1                  | 30        | 530           | 54      | 0.45        | 0.26 | 0.23 | 0.19 | 0.10 | 0.12 |
|                                      | P2                  | 30        | 700           | 70      | 0.59        | 0.34 | 0.30 | 0.25 | 0.20 | 0.16 |
|                                      | P3                  | 30        | 1050          | 102     | 0.86        | 0.50 | 0.44 | 0.38 | 0.30 | 0.22 |
|                                      | P4                  | 30        | 1250          | 125     | 1.06        | 0.60 | 0.52 | 0.46 | 0.37 | 0.27 |
|                                      | P5                  | 30        | 1400          | 138     | 1.16        | 0.67 | 0.58 | 0.51 | 0.40 | 0.29 |
|                                      | P6                  | 40        | 1250          | 163     | 1.36        | 0.78 | 0.68 | 0.59 | 0.47 | 0.34 |
|                                      | P7                  | 40        | 1400          | 183     | 1.53        | 0.88 | 0.76 | 0.66 | 0.53 | 0.38 |
|                                      | P8                  | 60        | 1050          | 207     | 1.74        | 0.98 | 0.87 | 0.76 | 0.64 | 0.49 |
|                                      | P9                  | 60        | 1250          | 241     | 2.01        | 1.16 | 1.01 | 0.89 | 0.70 | 0.51 |
| Rotated Optics (Requires L90 or R90) | P10                 | 60        | 530           | 106     | 0.90        | 0.52 | 0.47 | 0.43 | 0.33 | 0.27 |
|                                      | P11                 | 60        | 700           | 137     | 1.15        | 0.67 | 0.60 | 0.53 | 0.42 | 0.32 |
|                                      | P12                 | 60        | 1050          | 207     | 1.74        | 0.99 | 0.87 | 0.76 | 0.60 | 0.46 |
|                                      | P13                 | 60        | 1250          | 231     | 1.93        | 1.12 | 0.97 | 0.86 | 0.67 | 0.49 |

#### Controls Options

| Nomenclature  | Description   | Functionality   | Primary control device  | Notes  |
|---------------|---|---|---|--|
| FA0           | Field adjustable output device installed inside the luminaire; wired to the driver dimming leads. | Allows the luminaire to be manually dimmed, effectively trimming the light output.  | FA0 device  | Cannot be used with other controls options that need the 0-10V leads                                 |
| DS            | Drivers wired independently for 50/50 luminaire operation   | The luminaire is wired to two separate circuits, allowing for 50/50 operation.  | Independently wired drivers   | Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative. |
| PERS or PER7  | Twist-lock photocell receptacle   | Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.              | Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM. | Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire                        |
| PIR or PIRH   | Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting          | Luminaires dim when no occupancy is detected.   | Acuity Controls SBOR  | Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.          |
| NLTAIR2 PIRHN | nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.            | Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse. | nLight Air rSDGR  | nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.    |

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 30             | 530           | P1            | 54W          | T1S        | 6,457                | 2 | 0 | 2 | 120 | 6,956                | 2 | 0 | 2 | 129 | 7,044                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2S        | 6,450                | 2 | 0 | 2 | 119 | 6,949                | 2 | 0 | 2 | 129 | 7,037                | 2 | 0 | 2 | 130 |
|                |               |               |              | T2M        | 6,483                | 1 | 0 | 1 | 120 | 6,984                | 2 | 0 | 2 | 129 | 7,073                | 2 | 0 | 2 | 131 |
|                |               |               |              | T3S        | 6,279                | 2 | 0 | 2 | 116 | 6,764                | 2 | 0 | 2 | 125 | 6,850                | 2 | 0 | 2 | 127 |
|                |               |               |              | T3M        | 6,468                | 1 | 0 | 2 | 120 | 6,967                | 1 | 0 | 2 | 129 | 7,056                | 1 | 0 | 2 | 131 |
|                |               |               |              | T4M        | 6,327                | 1 | 0 | 2 | 117 | 6,816                | 1 | 0 | 2 | 126 | 6,902                | 1 | 0 | 2 | 128 |
|                |               |               |              | TFTM       | 6,464                | 1 | 0 | 2 | 120 | 6,963                | 1 | 0 | 2 | 129 | 7,051                | 1 | 0 | 2 | 131 |
|                |               |               |              | TSVS       | 6,722                | 2 | 0 | 0 | 124 | 7,242                | 3 | 0 | 0 | 134 | 7,334                | 3 | 0 | 0 | 136 |
|                |               |               |              | T5S        | 6,728                | 2 | 0 | 1 | 125 | 7,248                | 2 | 0 | 1 | 134 | 7,340                | 2 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 6,711                | 3 | 0 | 1 | 124 | 7,229                | 3 | 0 | 1 | 134 | 7,321                | 3 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 6,667                | 3 | 0 | 2 | 123 | 7,182                | 3 | 0 | 2 | 133 | 7,273                | 3 | 0 | 2 | 135 |
|                |               |               |              | BLC        | 5,299                | 1 | 0 | 1 | 98  | 5,709                | 1 | 0 | 2 | 106 | 5,781                | 1 | 0 | 2 | 107 |
|                |               |               |              | LCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
|                |               |               |              | RCCO       | 3,943                | 1 | 0 | 2 | 73  | 4,248                | 1 | 0 | 2 | 79  | 4,302                | 1 | 0 | 2 | 80  |
| 30             | 700           | P2            | 70W          | T1S        | 8,249                | 2 | 0 | 2 | 118 | 8,886                | 2 | 0 | 2 | 127 | 8,999                | 2 | 0 | 2 | 129 |
|                |               |               |              | T2S        | 8,240                | 2 | 0 | 2 | 118 | 8,877                | 2 | 0 | 2 | 127 | 8,989                | 2 | 0 | 2 | 128 |
|                |               |               |              | T2M        | 8,283                | 2 | 0 | 2 | 118 | 8,923                | 2 | 0 | 2 | 127 | 9,036                | 2 | 0 | 2 | 129 |
|                |               |               |              | T3S        | 8,021                | 2 | 0 | 2 | 115 | 8,641                | 2 | 0 | 2 | 123 | 8,751                | 2 | 0 | 2 | 125 |
|                |               |               |              | T3M        | 8,263                | 2 | 0 | 2 | 118 | 8,901                | 2 | 0 | 2 | 127 | 9,014                | 2 | 0 | 2 | 129 |
|                |               |               |              | T4M        | 8,083                | 2 | 0 | 2 | 115 | 8,708                | 2 | 0 | 2 | 124 | 8,818                | 2 | 0 | 2 | 126 |
|                |               |               |              | TFTM       | 8,257                | 2 | 0 | 2 | 118 | 8,896                | 2 | 0 | 2 | 127 | 9,008                | 2 | 0 | 2 | 129 |
|                |               |               |              | TSVS       | 8,588                | 3 | 0 | 0 | 123 | 9,252                | 3 | 0 | 0 | 132 | 9,369                | 3 | 0 | 0 | 134 |
|                |               |               |              | T5S        | 8,595                | 3 | 0 | 1 | 123 | 9,259                | 3 | 0 | 1 | 132 | 9,376                | 3 | 0 | 1 | 134 |
|                |               |               |              | T5M        | 8,573                | 3 | 0 | 2 | 122 | 9,236                | 3 | 0 | 2 | 132 | 9,353                | 3 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 8,517                | 3 | 0 | 2 | 122 | 9,175                | 4 | 0 | 2 | 131 | 9,291                | 4 | 0 | 2 | 133 |
|                |               |               |              | BLC        | 6,770                | 1 | 0 | 2 | 97  | 7,293                | 1 | 0 | 2 | 104 | 7,386                | 1 | 0 | 2 | 106 |
|                |               |               |              | LCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
|                |               |               |              | RCCO       | 5,038                | 1 | 0 | 2 | 72  | 5,427                | 1 | 0 | 2 | 78  | 5,496                | 1 | 0 | 2 | 79  |
| 30             | 1050          | P3            | 102W         | T1S        | 11,661               | 2 | 0 | 2 | 114 | 12,562               | 3 | 0 | 3 | 123 | 12,721               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2S        | 11,648               | 2 | 0 | 2 | 114 | 12,548               | 3 | 0 | 3 | 123 | 12,707               | 3 | 0 | 3 | 125 |
|                |               |               |              | T2M        | 11,708               | 2 | 0 | 2 | 115 | 12,613               | 2 | 0 | 2 | 124 | 12,773               | 2 | 0 | 2 | 125 |
|                |               |               |              | T3S        | 11,339               | 2 | 0 | 2 | 111 | 12,215               | 3 | 0 | 3 | 120 | 12,370               | 3 | 0 | 3 | 121 |
|                |               |               |              | T3M        | 11,680               | 2 | 0 | 2 | 115 | 12,582               | 2 | 0 | 2 | 123 | 12,742               | 2 | 0 | 2 | 125 |
|                |               |               |              | T4M        | 11,426               | 2 | 0 | 3 | 112 | 12,309               | 2 | 0 | 3 | 121 | 12,465               | 2 | 0 | 3 | 122 |
|                |               |               |              | TFTM       | 11,673               | 2 | 0 | 2 | 114 | 12,575               | 2 | 0 | 3 | 123 | 12,734               | 2 | 0 | 3 | 125 |
|                |               |               |              | TSVS       | 12,140               | 3 | 0 | 1 | 119 | 13,078               | 3 | 0 | 1 | 128 | 13,244               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5S        | 12,150               | 3 | 0 | 1 | 119 | 13,089               | 3 | 0 | 1 | 128 | 13,254               | 3 | 0 | 1 | 130 |
|                |               |               |              | T5M        | 12,119               | 4 | 0 | 2 | 119 | 13,056               | 4 | 0 | 2 | 128 | 13,221               | 4 | 0 | 2 | 130 |
|                |               |               |              | TSW        | 12,040               | 4 | 0 | 3 | 118 | 12,970               | 4 | 0 | 3 | 127 | 13,134               | 4 | 0 | 3 | 129 |
|                |               |               |              | BLC        | 9,570                | 1 | 0 | 2 | 94  | 10,310               | 1 | 0 | 2 | 101 | 10,440               | 1 | 0 | 2 | 102 |
|                |               |               |              | LCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
|                |               |               |              | RCCO       | 7,121                | 1 | 0 | 3 | 70  | 7,671                | 1 | 0 | 3 | 75  | 7,768                | 1 | 0 | 3 | 76  |
| 30             | 1250          | P4            | 125W         | T1S        | 13,435               | 3 | 0 | 3 | 107 | 14,473               | 3 | 0 | 3 | 116 | 14,657               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2S        | 13,421               | 3 | 0 | 3 | 107 | 14,458               | 3 | 0 | 3 | 116 | 14,641               | 3 | 0 | 3 | 117 |
|                |               |               |              | T2M        | 13,490               | 2 | 0 | 2 | 108 | 14,532               | 3 | 0 | 3 | 116 | 14,716               | 3 | 0 | 3 | 118 |
|                |               |               |              | T3S        | 13,064               | 3 | 0 | 3 | 105 | 14,074               | 3 | 0 | 3 | 113 | 14,252               | 3 | 0 | 3 | 114 |
|                |               |               |              | T3M        | 13,457               | 2 | 0 | 2 | 108 | 14,497               | 2 | 0 | 2 | 116 | 14,681               | 2 | 0 | 2 | 117 |
|                |               |               |              | T4M        | 13,165               | 2 | 0 | 3 | 105 | 14,182               | 2 | 0 | 3 | 113 | 14,362               | 2 | 0 | 3 | 115 |
|                |               |               |              | TFTM       | 13,449               | 2 | 0 | 3 | 108 | 14,488               | 2 | 0 | 3 | 116 | 14,672               | 2 | 0 | 3 | 117 |
|                |               |               |              | TSVS       | 13,987               | 4 | 0 | 1 | 112 | 15,068               | 4 | 0 | 1 | 121 | 15,259               | 4 | 0 | 1 | 122 |
|                |               |               |              | T5S        | 13,999               | 3 | 0 | 1 | 112 | 15,080               | 3 | 0 | 1 | 121 | 15,271               | 3 | 0 | 1 | 122 |
|                |               |               |              | T5M        | 13,963               | 4 | 0 | 2 | 112 | 15,042               | 4 | 0 | 2 | 120 | 15,233               | 4 | 0 | 2 | 122 |
|                |               |               |              | TSW        | 13,872               | 4 | 0 | 3 | 111 | 14,944               | 4 | 0 | 3 | 120 | 15,133               | 4 | 0 | 3 | 121 |
|                |               |               |              | BLC        | 11,027               | 1 | 0 | 2 | 88  | 11,879               | 1 | 0 | 2 | 95  | 12,029               | 1 | 0 | 2 | 96  |
|                |               |               |              | LCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 8,205                | 1 | 0 | 3 | 66  | 8,839                | 1 | 0 | 3 | 71  | 8,951                | 1 | 0 | 3 | 72  |
| 30             | 1400          | P5            | 138W         | T1S        | 14,679               | 3 | 0 | 3 | 106 | 15,814               | 3 | 0 | 3 | 115 | 16,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 14,664               | 3 | 0 | 3 | 106 | 15,797               | 3 | 0 | 3 | 114 | 15,997               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2M        | 14,739               | 3 | 0 | 3 | 107 | 15,878               | 3 | 0 | 3 | 115 | 16,079               | 3 | 0 | 3 | 117 |
|                |               |               |              | T3S        | 14,274               | 3 | 0 | 3 | 103 | 15,377               | 3 | 0 | 3 | 111 | 15,572               | 3 | 0 | 3 | 113 |
|                |               |               |              | T3M        | 14,704               | 2 | 0 | 3 | 107 | 15,840               | 3 | 0 | 3 | 115 | 16,040               | 3 | 0 | 3 | 116 |
|                |               |               |              | T4M        | 14,384               | 2 | 0 | 3 | 104 | 15,496               | 3 | 0 | 3 | 112 | 15,692               | 3 | 0 | 3 | 114 |
|                |               |               |              | TFTM       | 14,695               | 2 | 0 | 3 | 106 | 15,830               | 3 | 0 | 3 | 115 | 16,030               | 3 | 0 | 3 | 116 |
|                |               |               |              | TSVS       | 15,283               | 4 | 0 | 1 | 111 | 16,464               | 4 | 0 | 1 | 119 | 16,672               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 15,295               | 3 | 0 | 1 | 111 | 16,477               | 4 | 0 | 1 | 119 | 16,686               | 4 | 0 | 1 | 121 |
|                |               |               |              | T5M        | 15,257               | 4 | 0 | 2 | 111 | 16,435               | 4 | 0 | 2 | 119 | 16,644               | 4 | 0 | 2 | 121 |
|                |               |               |              | TSW        | 15,157               | 4 | 0 | 3 | 110 | 16,328               | 4 | 0 | 3 | 118 | 16,534               | 4 | 0 | 3 | 120 |
|                |               |               |              | BLC        | 12,048               | 1 | 0 | 2 | 87  | 12,979               | 1 | 0 | 2 | 94  | 13,143               | 1 | 0 | 2 | 95  |
|                |               |               |              | LCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |
|                |               |               |              | RCCO       | 8,965                | 1 | 0 | 3 | 65  | 9,657                | 1 | 0 | 3 | 70  | 9,780                | 1 | 0 | 3 | 71  |



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Forward Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 40             | 1250          | P6            | 163W         | T1S        | 17,654               | 3 | 0 | 3 | 108 | 19,018               | 3 | 0 | 3 | 117 | 19,259               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2S        | 17,635               | 3 | 0 | 3 | 108 | 18,998               | 3 | 0 | 3 | 117 | 19,238               | 3 | 0 | 3 | 118 |
|                |               |               |              | T2M        | 17,726               | 3 | 0 | 3 | 109 | 19,096               | 3 | 0 | 3 | 117 | 19,337               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 17,167               | 3 | 0 | 3 | 105 | 18,493               | 3 | 0 | 3 | 113 | 18,727               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3M        | 17,683               | 3 | 0 | 3 | 108 | 19,049               | 3 | 0 | 3 | 117 | 19,290               | 3 | 0 | 3 | 118 |
|                |               |               |              | T4M        | 17,299               | 3 | 0 | 3 | 106 | 18,635               | 3 | 0 | 4 | 114 | 18,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 17,672               | 3 | 0 | 3 | 108 | 19,038               | 3 | 0 | 4 | 117 | 19,279               | 3 | 0 | 4 | 118 |
|                |               |               |              | TSVS       | 18,379               | 4 | 0 | 1 | 113 | 19,800               | 4 | 0 | 1 | 121 | 20,050               | 4 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 18,394               | 4 | 0 | 2 | 113 | 19,816               | 4 | 0 | 2 | 122 | 20,066               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 18,348               | 4 | 0 | 2 | 113 | 19,766               | 4 | 0 | 2 | 121 | 20,016               | 4 | 0 | 2 | 123 |
|                |               |               |              | TSW        | 18,228               | 5 | 0 | 3 | 112 | 19,636               | 5 | 0 | 3 | 120 | 19,885               | 5 | 0 | 3 | 122 |
|                |               |               |              | BLC        | 14,489               | 2 | 0 | 2 | 89  | 15,609               | 2 | 0 | 3 | 96  | 15,806               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
|                |               |               |              | RCCO       | 10,781               | 1 | 0 | 3 | 66  | 11,614               | 1 | 0 | 3 | 71  | 11,761               | 2 | 0 | 3 | 72  |
| 40             | 1400          | P7            | 183W         | T1S        | 19,227               | 3 | 0 | 3 | 105 | 20,712               | 3 | 0 | 3 | 113 | 20,975               | 3 | 0 | 3 | 115 |
|                |               |               |              | T2S        | 19,206               | 3 | 0 | 3 | 105 | 20,690               | 3 | 0 | 3 | 113 | 20,952               | 3 | 0 | 3 | 114 |
|                |               |               |              | T2M        | 19,305               | 3 | 0 | 3 | 105 | 20,797               | 3 | 0 | 3 | 114 | 21,060               | 3 | 0 | 3 | 115 |
|                |               |               |              | T3S        | 18,696               | 3 | 0 | 3 | 102 | 20,141               | 3 | 0 | 3 | 110 | 20,396               | 3 | 0 | 4 | 111 |
|                |               |               |              | T3M        | 19,258               | 3 | 0 | 3 | 105 | 20,746               | 3 | 0 | 3 | 113 | 21,009               | 3 | 0 | 3 | 115 |
|                |               |               |              | T4M        | 18,840               | 3 | 0 | 4 | 103 | 20,296               | 3 | 0 | 4 | 111 | 20,553               | 3 | 0 | 4 | 112 |
|                |               |               |              | TFTM       | 19,246               | 3 | 0 | 4 | 105 | 20,734               | 3 | 0 | 4 | 113 | 20,996               | 3 | 0 | 4 | 115 |
|                |               |               |              | TSVS       | 20,017               | 4 | 0 | 1 | 109 | 21,564               | 4 | 0 | 1 | 118 | 21,837               | 4 | 0 | 1 | 119 |
|                |               |               |              | T5S        | 20,033               | 4 | 0 | 2 | 109 | 21,581               | 4 | 0 | 2 | 118 | 21,854               | 4 | 0 | 2 | 119 |
|                |               |               |              | T5M        | 19,983               | 4 | 0 | 2 | 109 | 21,527               | 5 | 0 | 3 | 118 | 21,799               | 5 | 0 | 3 | 119 |
|                |               |               |              | TSW        | 19,852               | 5 | 0 | 3 | 108 | 21,386               | 5 | 0 | 3 | 117 | 21,656               | 5 | 0 | 3 | 118 |
|                |               |               |              | BLC        | 15,780               | 2 | 0 | 3 | 86  | 16,999               | 2 | 0 | 3 | 93  | 17,214               | 2 | 0 | 3 | 94  |
|                |               |               |              | LCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
|                |               |               |              | RCCO       | 11,742               | 2 | 0 | 3 | 64  | 12,649               | 2 | 0 | 3 | 69  | 12,809               | 2 | 0 | 3 | 70  |
| 60             | 1050          | P8            | 207W         | T1S        | 22,490               | 3 | 0 | 3 | 109 | 24,228               | 3 | 0 | 3 | 117 | 24,535               | 3 | 0 | 3 | 119 |
|                |               |               |              | T2S        | 22,466               | 3 | 0 | 4 | 109 | 24,202               | 3 | 0 | 4 | 117 | 24,509               | 3 | 0 | 4 | 118 |
|                |               |               |              | T2M        | 22,582               | 3 | 0 | 3 | 109 | 24,327               | 3 | 0 | 3 | 118 | 24,635               | 3 | 0 | 3 | 119 |
|                |               |               |              | T3S        | 21,870               | 3 | 0 | 4 | 106 | 23,560               | 3 | 0 | 4 | 114 | 23,858               | 3 | 0 | 4 | 115 |
|                |               |               |              | T3M        | 22,527               | 3 | 0 | 4 | 109 | 24,268               | 3 | 0 | 4 | 117 | 24,575               | 3 | 0 | 4 | 119 |
|                |               |               |              | T4M        | 22,038               | 3 | 0 | 4 | 106 | 23,741               | 3 | 0 | 4 | 115 | 24,041               | 3 | 0 | 4 | 116 |
|                |               |               |              | TFTM       | 22,513               | 3 | 0 | 4 | 109 | 24,253               | 3 | 0 | 4 | 117 | 24,560               | 3 | 0 | 4 | 119 |
|                |               |               |              | TSVS       | 23,415               | 5 | 0 | 1 | 113 | 25,224               | 5 | 0 | 1 | 122 | 25,543               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 23,434               | 4 | 0 | 2 | 113 | 25,244               | 4 | 0 | 2 | 122 | 25,564               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,221               | 5 | 0 | 4 | 112 | 25,016               | 5 | 0 | 4 | 121 | 25,332               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 18,458               | 2 | 0 | 3 | 89  | 19,885               | 2 | 0 | 3 | 96  | 20,136               | 2 | 0 | 3 | 97  |
|                |               |               |              | LCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,735               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
| 60             | 1250          | P9            | 241W         | T1S        | 25,575               | 3 | 0 | 3 | 106 | 27,551               | 3 | 0 | 3 | 114 | 27,900               | 3 | 0 | 3 | 116 |
|                |               |               |              | T2S        | 25,548               | 3 | 0 | 4 | 106 | 27,522               | 3 | 0 | 4 | 114 | 27,871               | 3 | 0 | 4 | 116 |
|                |               |               |              | T2M        | 25,680               | 3 | 0 | 3 | 107 | 27,664               | 3 | 0 | 3 | 115 | 28,014               | 3 | 0 | 3 | 116 |
|                |               |               |              | T3S        | 24,870               | 3 | 0 | 4 | 103 | 26,791               | 3 | 0 | 4 | 111 | 27,130               | 3 | 0 | 4 | 113 |
|                |               |               |              | T3M        | 25,617               | 3 | 0 | 4 | 106 | 27,597               | 3 | 0 | 4 | 115 | 27,946               | 3 | 0 | 4 | 116 |
|                |               |               |              | T4M        | 25,061               | 3 | 0 | 4 | 104 | 26,997               | 3 | 0 | 4 | 112 | 27,339               | 3 | 0 | 4 | 113 |
|                |               |               |              | TFTM       | 25,602               | 3 | 0 | 4 | 106 | 27,580               | 3 | 0 | 4 | 114 | 27,929               | 3 | 0 | 4 | 116 |
|                |               |               |              | TSVS       | 26,626               | 5 | 0 | 1 | 110 | 28,684               | 5 | 0 | 1 | 119 | 29,047               | 5 | 0 | 1 | 121 |
|                |               |               |              | T5S        | 26,648               | 4 | 0 | 2 | 111 | 28,707               | 5 | 0 | 2 | 119 | 29,070               | 5 | 0 | 2 | 121 |
|                |               |               |              | T5M        | 26,581               | 5 | 0 | 3 | 110 | 28,635               | 5 | 0 | 3 | 119 | 28,997               | 5 | 0 | 3 | 120 |
|                |               |               |              | TSW        | 26,406               | 5 | 0 | 4 | 110 | 28,447               | 5 | 0 | 4 | 118 | 28,807               | 5 | 0 | 4 | 120 |
|                |               |               |              | BLC        | 20,990               | 2 | 0 | 3 | 87  | 22,612               | 2 | 0 | 3 | 94  | 22,898               | 2 | 0 | 3 | 95  |
|                |               |               |              | LCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |
|                |               |               |              | RCCO       | 15,619               | 2 | 0 | 4 | 65  | 16,825               | 2 | 0 | 4 | 70  | 17,038               | 2 | 0 | 4 | 71  |



# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

| Rotated Optics |               |               |              |            |                      |   |   |   |     |                      |   |   |   |     |                      |   |   |   |     |
|----------------|---------------|---------------|--------------|------------|----------------------|---|---|---|-----|----------------------|---|---|---|-----|----------------------|---|---|---|-----|
| LED Count      | Drive Current | Power Package | System Watts | Dist. Type | 30K (3000 K, 70 CRI) |   |   |   |     | 40K (4000 K, 70 CRI) |   |   |   |     | 50K (5000 K, 70 CRI) |   |   |   |     |
|                |               |               |              |            | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW | Lumens               | B | U | G | LPW |
| 60             | 530           | P10           | 106W         | T1S        | 13,042               | 3 | 0 | 3 | 123 | 14,050               | 3 | 0 | 3 | 133 | 14,228               | 3 | 0 | 3 | 134 |
|                |               |               |              | T2S        | 12,967               | 4 | 0 | 4 | 122 | 13,969               | 4 | 0 | 4 | 132 | 14,146               | 4 | 0 | 4 | 133 |
|                |               |               |              | T2M        | 13,201               | 3 | 0 | 3 | 125 | 14,221               | 3 | 0 | 3 | 134 | 14,401               | 3 | 0 | 3 | 136 |
|                |               |               |              | T3S        | 12,766               | 4 | 0 | 4 | 120 | 13,752               | 4 | 0 | 4 | 130 | 13,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | T3M        | 13,193               | 4 | 0 | 4 | 124 | 14,213               | 4 | 0 | 4 | 134 | 14,393               | 4 | 0 | 4 | 136 |
|                |               |               |              | T4M        | 12,944               | 4 | 0 | 4 | 122 | 13,945               | 4 | 0 | 4 | 132 | 14,121               | 4 | 0 | 4 | 133 |
|                |               |               |              | TFTM       | 13,279               | 4 | 0 | 4 | 125 | 14,305               | 4 | 0 | 4 | 135 | 14,486               | 4 | 0 | 4 | 137 |
|                |               |               |              | TSVS       | 13,372               | 3 | 0 | 1 | 126 | 14,405               | 4 | 0 | 1 | 136 | 14,588               | 4 | 0 | 1 | 138 |
|                |               |               |              | T5S        | 13,260               | 3 | 0 | 1 | 125 | 14,284               | 3 | 0 | 1 | 135 | 14,465               | 3 | 0 | 1 | 136 |
|                |               |               |              | T5M        | 13,256               | 4 | 0 | 2 | 125 | 14,281               | 4 | 0 | 2 | 135 | 14,462               | 4 | 0 | 2 | 136 |
|                |               |               |              | TSW        | 13,137               | 4 | 0 | 3 | 124 | 14,153               | 4 | 0 | 3 | 134 | 14,332               | 4 | 0 | 3 | 135 |
|                |               |               |              | BLC        | 10,906               | 3 | 0 | 3 | 103 | 11,749               | 3 | 0 | 3 | 111 | 11,898               | 3 | 0 | 3 | 112 |
|                |               |               |              | LCCO       | 7,789                | 1 | 0 | 3 | 73  | 8,391                | 1 | 0 | 3 | 79  | 8,497                | 1 | 0 | 3 | 80  |
|                |               |               |              | RCCO       | 7,779                | 4 | 0 | 4 | 73  | 8,380                | 4 | 0 | 4 | 79  | 8,486                | 4 | 0 | 4 | 80  |
| 60             | 700           | P11           | 137W         | T1S        | 16,556               | 3 | 0 | 3 | 121 | 17,835               | 3 | 0 | 3 | 130 | 18,061               | 4 | 0 | 4 | 132 |
|                |               |               |              | T2S        | 16,461               | 4 | 0 | 4 | 120 | 17,733               | 4 | 0 | 4 | 129 | 17,957               | 4 | 0 | 4 | 131 |
|                |               |               |              | T2M        | 16,758               | 4 | 0 | 4 | 122 | 18,053               | 4 | 0 | 4 | 132 | 18,281               | 4 | 0 | 4 | 133 |
|                |               |               |              | T3S        | 16,205               | 4 | 0 | 4 | 118 | 17,457               | 4 | 0 | 4 | 127 | 17,678               | 4 | 0 | 4 | 129 |
|                |               |               |              | T3M        | 16,748               | 4 | 0 | 4 | 122 | 18,042               | 4 | 0 | 4 | 132 | 18,271               | 4 | 0 | 4 | 133 |
|                |               |               |              | T4M        | 16,432               | 4 | 0 | 4 | 120 | 17,702               | 4 | 0 | 4 | 129 | 17,926               | 4 | 0 | 4 | 131 |
|                |               |               |              | TFTM       | 16,857               | 4 | 0 | 4 | 123 | 18,159               | 4 | 0 | 4 | 133 | 18,389               | 4 | 0 | 4 | 134 |
|                |               |               |              | TSVS       | 16,975               | 4 | 0 | 1 | 124 | 18,287               | 4 | 0 | 1 | 133 | 18,518               | 4 | 0 | 1 | 135 |
|                |               |               |              | T5S        | 16,832               | 4 | 0 | 1 | 123 | 18,133               | 4 | 0 | 2 | 132 | 18,362               | 4 | 0 | 2 | 134 |
|                |               |               |              | T5M        | 16,828               | 4 | 0 | 2 | 123 | 18,128               | 4 | 0 | 2 | 132 | 18,358               | 4 | 0 | 2 | 134 |
|                |               |               |              | TSW        | 16,677               | 4 | 0 | 3 | 122 | 17,966               | 5 | 0 | 3 | 131 | 18,193               | 5 | 0 | 3 | 133 |
|                |               |               |              | BLC        | 13,845               | 3 | 0 | 3 | 101 | 14,915               | 3 | 0 | 3 | 109 | 15,103               | 3 | 0 | 3 | 110 |
|                |               |               |              | LCCO       | 9,888                | 1 | 0 | 3 | 72  | 10,652               | 2 | 0 | 3 | 78  | 10,787               | 2 | 0 | 3 | 79  |
|                |               |               |              | RCCO       | 9,875                | 4 | 0 | 4 | 72  | 10,638               | 4 | 0 | 4 | 78  | 10,773               | 4 | 0 | 4 | 79  |
| 60             | 1050          | P12           | 207W         | T1S        | 22,996               | 4 | 0 | 4 | 111 | 24,773               | 4 | 0 | 4 | 120 | 25,087               | 4 | 0 | 4 | 121 |
|                |               |               |              | T2S        | 22,864               | 4 | 0 | 4 | 110 | 24,631               | 5 | 0 | 5 | 119 | 24,943               | 5 | 0 | 5 | 120 |
|                |               |               |              | T2M        | 23,277               | 4 | 0 | 4 | 112 | 25,075               | 4 | 0 | 4 | 121 | 25,393               | 4 | 0 | 4 | 123 |
|                |               |               |              | T3S        | 22,509               | 4 | 0 | 4 | 109 | 24,248               | 5 | 0 | 5 | 117 | 24,555               | 5 | 0 | 5 | 119 |
|                |               |               |              | T3M        | 23,263               | 4 | 0 | 4 | 112 | 25,061               | 4 | 0 | 4 | 121 | 25,378               | 4 | 0 | 4 | 123 |
|                |               |               |              | T4M        | 22,824               | 5 | 0 | 5 | 110 | 24,588               | 5 | 0 | 5 | 119 | 24,899               | 5 | 0 | 5 | 120 |
|                |               |               |              | TFTM       | 23,414               | 5 | 0 | 5 | 113 | 25,223               | 5 | 0 | 5 | 122 | 25,543               | 5 | 0 | 5 | 123 |
|                |               |               |              | TSVS       | 23,579               | 5 | 0 | 1 | 114 | 25,401               | 5 | 0 | 1 | 123 | 25,722               | 5 | 0 | 1 | 124 |
|                |               |               |              | T5S        | 23,380               | 4 | 0 | 2 | 113 | 25,187               | 4 | 0 | 2 | 122 | 25,506               | 4 | 0 | 2 | 123 |
|                |               |               |              | T5M        | 23,374               | 5 | 0 | 3 | 113 | 25,181               | 5 | 0 | 3 | 122 | 25,499               | 5 | 0 | 3 | 123 |
|                |               |               |              | TSW        | 23,165               | 5 | 0 | 4 | 112 | 24,955               | 5 | 0 | 4 | 121 | 25,271               | 5 | 0 | 4 | 122 |
|                |               |               |              | BLC        | 19,231               | 4 | 0 | 4 | 93  | 20,717               | 4 | 0 | 4 | 100 | 20,979               | 4 | 0 | 4 | 101 |
|                |               |               |              | LCCO       | 13,734               | 2 | 0 | 3 | 66  | 14,796               | 2 | 0 | 4 | 71  | 14,983               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 13,716               | 4 | 0 | 4 | 66  | 14,776               | 4 | 0 | 4 | 71  | 14,963               | 4 | 0 | 4 | 72  |
| 60             | 1250          | P13           | 231W         | T1S        | 25,400               | 4 | 0 | 4 | 110 | 27,363               | 4 | 0 | 4 | 118 | 27,709               | 4 | 0 | 4 | 120 |
|                |               |               |              | T2S        | 25,254               | 5 | 0 | 5 | 109 | 27,205               | 5 | 0 | 5 | 118 | 27,550               | 5 | 0 | 5 | 119 |
|                |               |               |              | T2M        | 25,710               | 4 | 0 | 4 | 111 | 27,696               | 4 | 0 | 4 | 120 | 28,047               | 4 | 0 | 4 | 121 |
|                |               |               |              | T3S        | 24,862               | 5 | 0 | 5 | 108 | 26,783               | 5 | 0 | 5 | 116 | 27,122               | 5 | 0 | 5 | 117 |
|                |               |               |              | T3M        | 25,695               | 5 | 0 | 5 | 111 | 27,680               | 5 | 0 | 5 | 120 | 28,031               | 5 | 0 | 5 | 121 |
|                |               |               |              | T4M        | 25,210               | 5 | 0 | 5 | 109 | 27,158               | 5 | 0 | 5 | 118 | 27,502               | 5 | 0 | 5 | 119 |
|                |               |               |              | TFTM       | 25,861               | 5 | 0 | 5 | 112 | 27,860               | 5 | 0 | 5 | 121 | 28,212               | 5 | 0 | 5 | 122 |
|                |               |               |              | TSVS       | 26,043               | 5 | 0 | 1 | 113 | 28,056               | 5 | 0 | 1 | 121 | 28,411               | 5 | 0 | 1 | 123 |
|                |               |               |              | T5S        | 25,824               | 4 | 0 | 2 | 112 | 27,819               | 5 | 0 | 2 | 120 | 28,172               | 5 | 0 | 2 | 122 |
|                |               |               |              | T5M        | 25,818               | 5 | 0 | 3 | 112 | 27,813               | 5 | 0 | 3 | 120 | 28,165               | 5 | 0 | 3 | 122 |
|                |               |               |              | TSW        | 25,586               | 5 | 0 | 4 | 111 | 27,563               | 5 | 0 | 4 | 119 | 27,912               | 5 | 0 | 4 | 121 |
|                |               |               |              | BLC        | 21,241               | 4 | 0 | 4 | 92  | 22,882               | 4 | 0 | 4 | 99  | 23,172               | 4 | 0 | 4 | 100 |
|                |               |               |              | LCCO       | 15,170               | 2 | 0 | 4 | 66  | 16,342               | 2 | 0 | 4 | 71  | 16,549               | 2 | 0 | 4 | 72  |
|                |               |               |              | RCCO       | 15,150               | 5 | 0 | 5 | 66  | 16,321               | 5 | 0 | 5 | 71  | 16,527               | 5 | 0 | 5 | 72  |

## Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a **shaded background**. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability<sup>1</sup>
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a **shaded background**<sup>1</sup>

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

### INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

### LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product.

Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

