

D-Series Size 2 LED Wall Luminaire



d^{series}

Specifications Luminaire

Width: 18-1/2" (47.0 cm) **Weight:** 21 lbs (9.5 kg)

Depth: 10" (25.4 cm)


Height: 7-5/8" (19.4 cm)

Back Box (BBW)

Width: 5-1/2" (14.0 cm) **BBW Weight:** 1 lbs (0.5 kg)

Depth: 1-1/2" (3.8 cm)

Height: 4" (10.2 cm)

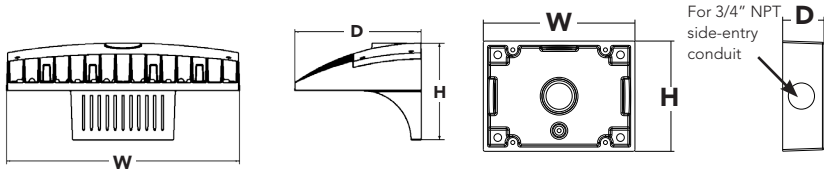

Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL[®] controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability¹
- This luminaire is part of an A+ Certified solution for ROAM[®]2 or XPoint[™] Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background¹

To learn more about A+, visit www.acuitybrands.com/aplus.

- See ordering tree for details.
- A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

A+ Capable options indicated by this color background.

Ordering Information

EXAMPLE: DSXW2 LED 30C 700 40K T3M MVOLT DDBTXD

DSXW2 LED	Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW2 LED	20C	20 LEDs (two engines)	350 350 mA	30K 3000 K	T2S Type II Short	MVOLT ¹	Shipped included (blank) Surface mounting bracket	Shipped installed PE Photoelectric cell, button type ⁴
			530 530 mA	40K 4000 K	T2M Type II Medium	120 ¹		
DSXW2 LED	30C	30 LEDs (three engines)	700 700 mA	50K 5000 K	T3S Type III Short	208 ¹	Shipped separately³ BBW Surface-mounted back box (for conduit entry)	PER NEMA twist-lock receptacle only (no controls)
			1000 1000 mA (1 A)	AMBPC Amber phosphor converted	T3M Type III Medium	240 ¹		
					T4M Type IV Medium	277 ¹		DMG 0-10V dimming driver (no controls)
					TFTM Forward Throw Medium	347 ²		DCR Dimmable and controllable via ROAM [®] (no controls) ⁵
					ASYDF Asymmetric diffuse	480 ²		PIRH 180° motion/ambient light sensor, 15-30' mtg ht ⁶
								PIRH1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ²
								PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ²

Other Options

Shipped installed	Shipped separately ⁹
SF Single fuse (120, 277, 347V) ⁸	BSW Bird-deterrent spikes
DF Double fuse (208, 240, 480V) ⁸	WG Wire guard
HS House-side shield ³	VG Vandal guard
SPD Separate surge protection ⁹	

Finish (required)

DDBXD Dark bronze	DSSXD Sandstone	DWHGXD Textured white
DBLXD Black	DDBTXD Textured dark bronze	DSSTXD Textured sandstone
DNAXD Natural aluminum	DBLBXD Textured black	
DWHXD White	DNATXD Textured natural aluminum	



Ordering Information

Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	PhotoCell - SSL twist-lock (120-277V) ¹⁰
DLL347F 1.5 CULJU	PhotoCell - SSL twist-lock (347V) ¹⁰
DLL480F 1.5 CULJU	PhotoCell - SSL twist-lock (480V) ¹⁰
DSHORT SBK U	Shorting cap ¹⁰
DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW2WG U	Wire guard accessory
DSXW2VG U	Vandal guard accessory
DSXW2BBW	Back box accessory
DD8XD U	(specify finish)

For more control options, visit [DTL](#) and [ROAM](#) online.

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Available with 30 LED/700mA options only (DSXW2 LED 30C 700). DMG option not available.
- Also available as a separate accessory; see Accessories information.
- Photocontrol (PE) requires 120, 208, 240 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Specifies a ROAM® enabled luminaire with 0-10V dimming capability; PER option required. Not available with 347V, 480V or PIRH. Additional hardware and services required for ROAM® deployment; must be purchased separately. Call 1-800-442-6745 or email: sales@roamservices.net.
- Specifies the [Sensor Switch SBGR-6-ODP](#) control; see [Outdoor Control Technical Guide](#) for details. Includes ambient light sensor. Not available with "PE" option (button type photocell) or DCR. Dimming driver standard.
- PIR and PIR1FC3V specify the [SensorSwitch SBGR-10-ODP](#) control; PIRH and PIRH1FC3V specify the [SensorSwitch SBGR-6-ODP](#) control; see [Motion Sensor Guide](#) for details. Dimming driver standard. Not available with PER5 or PER7. Ambient sensor disabled when ordered with DCR. Separate on/off required.
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- See the electrical section on page 2 for more details.
- Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K					40K					50K					AMBER				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
20C (20 LEDs)	350 mA	25W	T2S	2,783	1	0	1	111	2,989	1	0	1	120	3,007	1	0	1	120	1,720	1	0	1	69
			T2M	2,708	1	0	1	108	2,908	1	0	1	116	2,926	1	0	1	117	1,673	1	0	1	67
			T3S	2,748	1	0	1	110	2,951	1	0	1	118	2,970	1	0	1	119	1,698	0	0	1	68
			T3M	2,793	1	0	1	112	2,999	1	0	1	120	3,018	1	0	1	121	1,726	1	0	1	69
			T4M	2,756	1	0	1	110	2,959	1	0	1	118	2,978	1	0	1	119	1,703	0	0	1	68
	530 mA	36W	TFTM	2,754	1	0	1	110	2,957	1	0	1	118	2,975	1	0	1	119	1,701	0	0	1	68
			T2S	4,029	1	0	1	112	4,327	1	0	1	120	4,354	1	0	1	121	1,698	0	0	1	68
			T2M	3,920	1	0	1	109	4,210	1	0	1	117	4,236	1	0	1	118	1,726	1	0	1	69
			T3S	3,979	1	0	1	111	4,272	1	0	1	119	4,299	1	0	1	119	1,720	1	0	1	69
			T3M	4,044	1	0	1	112	4,342	1	0	2	121	4,369	1	0	2	121	1,701	0	0	1	68
	700 mA	47W	T4M	3,990	1	0	1	111	4,284	1	0	1	119	4,311	1	0	1	120	1,703	0	0	1	68
			TFTM	3,986	1	0	1	111	4,281	1	0	1	119	4,307	1	0	1	120	1,673	1	0	1	67
			T2S	5,130	1	0	1	109	5,509	1	0	1	117	5,544	1	0	1	118	2,473	1	0	1	69
			T2M	4,991	1	0	1	106	5,360	1	0	1	114	5,393	1	0	2	115	2,406	1	0	1	67
			T3S	5,066	1	0	1	108	5,440	1	0	1	116	5,474	1	0	1	116	2,442	1	0	1	68
	1000 mA	74W	T3M	5,148	1	0	2	110	5,528	1	0	2	118	5,563	1	0	2	118	2,482	1	0	1	69
			T4M	5,080	1	0	1	108	5,455	1	0	1	116	5,489	1	0	2	117	2,449	1	0	1	68
			TFTM	5,076	1	0	1	108	5,450	1	0	1	116	5,484	1	0	2	117	2,447	1	0	1	68
			T2S	7,148	1	0	1	97	7,675	1	0	1	104	7,723	1	0	1	104	3,060	1	0	1	65
			T2M	6,954	1	0	2	94	7,467	1	0	2	101	7,514	2	0	2	102	2,977	1	0	1	63
30C (30 LEDs)	350 mA	36W	T3S	7,058	1	0	1	95	7,579	1	0	1	102	7,626	1	0	2	103	3,021	1	0	1	64
			T3M	7,173	1	0	2	97	7,702	1	0	2	104	7,750	1	0	2	105	3,070	1	0	1	65
			T4M	7,077	1	0	2	96	7,599	1	0	2	103	7,647	1	0	2	103	3,029	1	0	1	64
			TFTM	7,071	1	0	2	96	7,593	1	0	2	103	7,641	1	0	2	103	3,027	1	0	1	64
			T2S	4,160	1	0	1	116	4,467	1	0	1	124	4,495	1	0	1	125	2,573	1	0	1	103
	530 mA	54W	T2M	4,047	1	0	1	112	4,346	1	0	1	121	4,373	1	0	1	121	2,503	1	0	1	100
			T3S	4,107	1	0	1	114	4,411	1	0	1	123	4,438	1	0	1	123	2,541	1	0	1	102
			T3M	4,174	1	0	1	116	4,482	1	0	2	125	4,511	1	0	2	125	2,582	1	0	1	103
			T4M	4,119	1	0	1	114	4,423	1	0	1	123	4,450	1	0	1	124	2,547	1	0	1	102
			TFTM	4,115	1	0	1	114	4,419	1	0	1	123	4,447	1	0	1	124	2,545	1	0	1	102
	700 mA	71W	T2S	6,001	1	0	1	111	6,444	1	0	1	119	6,485	1	0	1	120	2,573	1	0	1	71
			T2M	5,839	1	0	1	108	6,270	1	0	2	116	6,309	1	0	2	117	2,503	1	0	1	70
			T3S	5,926	1	0	1	110	6,363	1	0	1	118	6,403	1	0	1	119	2,541	1	0	1	71
			T3M	6,022	1	0	2	112	6,467	1	0	2	120	6,507	1	0	2	121	2,582	1	0	1	72
			T4M	5,942	1	0	1	110	6,381	1	0	2	118	6,420	1	0	2	119	2,547	1	0	1	71
	1000 mA	109W	TFTM	5,937	1	0	1	110	6,375	1	0	2	118	6,415	1	0	2	119	2,545	1	0	1	71
			T2S	7,609	1	0	1	107	8,170	1	0	1	115	8,221	2	0	2	116	3,696	1	0	1	68
			T2M	7,402	1	0	2	104	7,949	2	0	2	112	7,999	2	0	2	113	3,596	1	0	1	67
			T3S	7,513	1	0	1	106	8,068	1	0	2	114	8,118	1	0	2	114	3,649	1	0	1	68
			T3M	7,635	1	0	2	108	8,199	1	0	2	115	8,250	2	0	3	116	3,709	1	0	2	69
1000 mA	109W	T4M	7,533	1	0	2	106	8,089	1	0	2	114	8,140	1	0	2	115	3,659	1	0	1	68	
		TFTM	7,527	1	0	2	106	8,083	1	0	2	114	8,133	1	0	2	115	3,656	1	0	1	68	
		T2S	10,468	2	0	2	96	11,241	2	0	2	103	11,311	2	0	2	104	4,559	1	0	1	64	
		T2M	10,184	2	0	2	93	10,936	2	0	2	100	11,004	2	0	2	101	4,436	1	0	2	62	
		T3S	10,336	1	0	2	95	11,099	1	0	2	102	11,169	2	0	2	102	4,502	1	0	1	63	
T3M	10,505	2	0	3	96	11,280	2	0	3	103	11,351	2	0	3	104	4,575	1	0	2	64			
T4M	10,364	1	0	2	95	11,129	1	0	2	102	11,199	2	0	2	103	4,514	1	0	2	64			
TFTM	10,356	1	0	2	95	11,120	2	0	2	102	11,190	2	0	2	103	4,510	1	0	1	64			

Note: Available with phosphor-converted amber LED's (nomenclature AMBPC). These LED's produce light with 97+% >530 nm. Output can be calculated by applying a 0.7 factor to 4000 K lumen values and photometric files.



Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.98

Electrical Load

LEDs	Drive Current (mA)	System Watts	Current (A)					
			120V	208V	240V	277V	347V	480V
20C	350	25 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	-	-
	1000	74 W	0.68	0.39	0.34	0.29	-	-
30C	350	36 W	0.33	0.19	0.17	0.14	-	-
	530	54 W	0.50	0.29	0.25	0.22	-	-
	700	71 W	0.66	0.38	0.33	0.28	0.23	0.16
	1000	109 W	1.01	0.58	0.50	0.44	-	-

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXW2 LED 30C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).


To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.92	0.87

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 2 homepage](#).

Isofootcandle plots for the DSXW2 LED 30C 1000 40K. Distances are in units of mounting height (25').

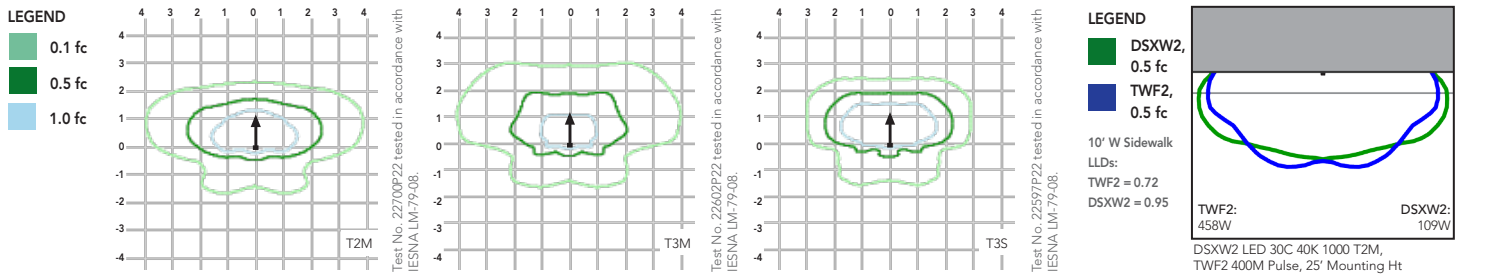

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 2 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L87/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

