

WAREHOUSE SHADE


Model No. _____

TYPE: **G2 SHADE**

JOB NAME: _____

CERTIFICATION: UL LISTED WET LOCATION

MODEL#	A (Height in Inches)	B (Diameter in Inches)
W508	6	8
W512	8	12
W514	9	14
W516	9	16
W518	9	18
W520	10	20

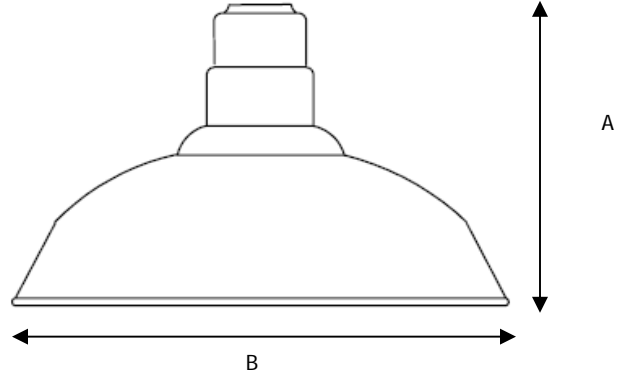

FINISH- Available in high quality powder coat.

LAMP HOLDERS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W. **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **High Intensity Discharge (H.I.D.)** medium base, 4KV pulse start socket, rated 660W/600V.

MOUNTING- 1/2" or 3/4" tapped hub is supplied. Top or side mount available. Fixtures are pre-wired with 48" or 96" leads. Available with cord or stem sets.

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets. Copper is spun from .040 gauge and 110 soft alloy.

MODEL#	FINISH	LIGHT SOURCE		
		INC	CF	HID (MH & HPS)
W508	40,41,42,43,44,45,46,48,49,50,51,52,53,54,55,57,58,59,60,61,62,63	100W	26W*	25W*
W512		100W	26,32,OR 42W*	35,50,70, or 100W*
W514		150W	26,32,OR 42W*	35,50,70, or 100W*
W516		200W	26,32,OR 42W*	35,50,70, or 100W*
W518		300W	26,32,OR 42W*	35,50,70,100,150, or 175W*
W520		300W	26,32,OR 42W*	35,50,70,100,150, or 175W*

* FOR REMOTE BALLAST SEE MOUNTING SOURCE

GLASS:

MOUNTING SOURCE:

ACCESSORIES:



PHONE: 877-999-1990
FAX: 877-999-1955

12260 EAST END AVE. CHINO, CA 91710





WAREHOUSE SHADE

Model No. _____

TYPE: _____

JOB NAME: _____

CERTIFICATION: UL LISTED WET LOCATION

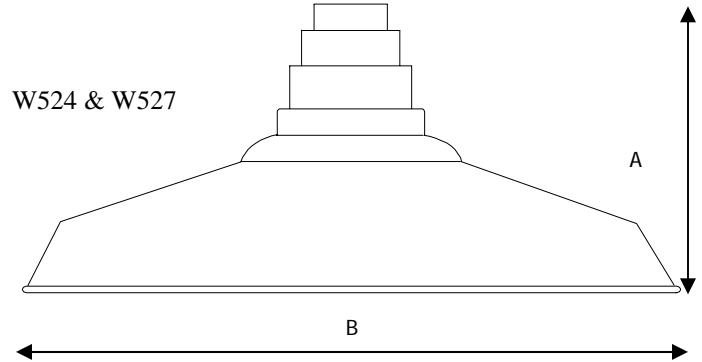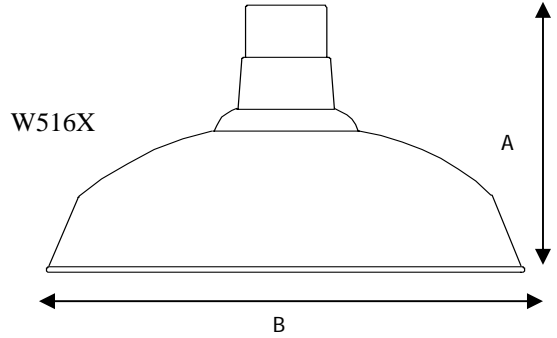

MODEL#	A (Height in Inches)	B (Diameter in Inches)
W516X	9	16
W524	16	24
W527	16	27

FINISH- Available in high quality powder coat.

LAMP HOLDERS- Accommodates **Incandescent** medium base porcelain socket, copper shell with nicked plate, rated 250V, 660W. **Compact Fluorescent** 4 pin heat resistant thermoplastic socket accommodates 26/32W (Gx24q-3 base) and 42W (Gx24q-4 base). Twist lock design provides for vibration and earthquake resistance, rated 75W, 600V. **High Intensity Discharge (H.I.D.)** medium base, 4KV pulse start socket, rated 660W/600V.

MOUNTING- 1/2" or 3/4" tapped hub is supplied. Top or side mount available. Fixtures are pre-wired with 48" or 96" leads. Available with cord or stem sets.

REFLECTOR- Spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. Galvanized is from 20 gauge sheets. Copper is spun from .040 gauge and 110 soft alloy.

MODEL#	FINISH	LIGHT SOURCE		
		INC	CF	HID (MH & HPS)
W516X	40,41,42,43,44,45,46,48,49,50,	200W	26,32,OR 42W*	35,50,70, or 100W*
W524	51,52,53,54,55,57,58,59,60,61,	300W	26,32,OR 42W*	35,50,70,100,150, or 175W*
W527	62,63	300W	26,32,OR 42W*	35,50,70,100,150, or 175W*

* FOR REMOTE BALLAST SEE MOUNTING SOURCE

GLASS:

MOUNTING SOURCE:

ACCESSORIES:



PHONE: 877-999-1990

FAX: 877-999-1955

12260 EAST END AVE. CHINO, CA 91710

wet location