

WS SMALL WALL PACK SERIES



Finish Color



Performance in a compact design, the SLG LED Small Wall Pack offers maximum light output for general purpose area and security lighting. It efficiently delivers lumens, and consume less energy than traditional wall mount technologies.



Applications: security, pathway and perimeter lighting, building entryway, walkways, etc.

Replacement: 150W MH

PERFORMANCE INFORMATION*

SERIES NUMBER	POWER	DELIVERED LUMENS	CCT
WS 38 G1 4K	30W	4,000 Lumens	4000K
WS 38 G1 5K	30W	4,050 Lumens	5000K

DIMENSIONS

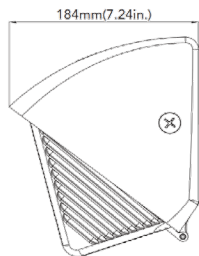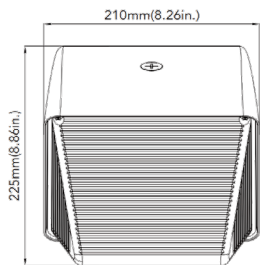

Weight:
30W: 3.71lb
25W: 3.38lb

Project:	
Catalog No.:	
Fixture Type:	
Notes:	

SPECIFICATIONS

HOUSING

Die-cast aluminum housing and back-housing

AMBIENT TEMPERATURE

Suitable for use in -25°C to +40°C (-13°F to 104°F)

MOUNTING

To J-Box, or surface conduit. Light weight Back box is mounted to the wall, wiring made-up before the lens and front housing.

EFFICACY

Up to 135 lumens per watt (see individual wattage data)

CCT AND CRI

4000K and 5000K CCT available; 70CRI

OPTICS

Vacuum metalized specular reflector. Clear acrylic lens.

WARRANTY

10 year limited warranty. Complete warranty terms located at:

www.slgus.com

ELECTRICAL

High quality constant-current drivers, >90% efficient and rated for either 50/60Hz operation, 120-277V input.

FINISH

Dark Bronze or White polyester powder coat

CERTIFICATIONS

UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. RoHs compliant.

Design Lights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.slgus.com/DLC to confirm which versions are qualified.

ORDERING GUIDE

EXAMPLE: WS 38 G1 4k

Luminaire Type	Lumen Output*	Generation	Voltage	CCT	Finish	Options
WS Small LED Wall Pack	38 4,050 Lumens	G1	Blank 120-277V	4K 4000K 5K 5000K	Standard:	Blank No Option P (PC UNV B3) Photocell
					Blank Dark Bronze	
					Custom:	
					W White***	

Standard driver operates on any line voltage from 120-277V (50/60 Hz).

* Data as report to DLC, actual test results may vary

***For any Finish color other than Dark Bronze, please call for custom order.



SLG Lighting
10643 W. Airport Blvd. Suite 400, Stafford, Texas 77477
Email: support@slgus.com | Phone: (832) 939-8412 | www.slgus.com

WS.V18.10

WM MEDIUM WALL PACK SERIES

Project:	
Catalog No.:	
Fixture Type:	
Notes:	



Enhanced LED performance in a classic design, the SLG LED Medium Wall Pack offers maximum light output for general purpose area and security lighting. It efficiently delivers lumens, and consume less energy than traditional wall mount technologies.

Applications: security, pathway and perimeter lighting, building entryway, walkways, etc.


Replacement: 175W - 250W MH

PERFORMANCE INFORMATION*


SERIES NUMBER	POWER	DELIVERED LUMENS	CCT
WM 30 G1 4K	30W	3,306 Lumens	4000K
WM 30 G1 5K	30W	3,400 Lumens	5000K
WM 53 G1 4K	45W	5,200 Lumens	4000K
WM 53 G1 5K	45W	5,300 Lumens	5000K
WM 81 G1 4K	70W	8,000 Lumens	4000K
WM 81 G1 5K	70W	8,100 Lumens	5000K

DIMENSIONS

Side View



Front View

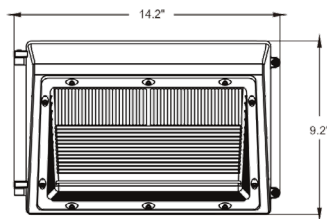

SPECIFICATIONS

HOUSING

Die-cast aluminum housing and back-housing

AMBIENT TEMPERATURE

Suitable for use in -25°C to +40°C (-13°F to 104°F)

MOUNTING

To J-Box, or surface conduit. Light weight Back box is mounted to the wall, wiring made-up before the lens and front housing.

EFFICACY

Up to 113 lumen's per watt (see individual wattage data)

CCT AND CRI

4000K and 5000K CCT available; 70CRI

OPTICS

Vacuum metalized specular reflector. Clear acrylic lens.

WARRANTY

10 year limited warranty. Complete warranty terms located at:

www.slgus.com

ELECTRICAL

High quality constant-current drivers, >90% efficient and rated for either 50/60Hz operation, 120-277V input.

FINISH

Dark Bronze or White polyester powder coat

CERTIFICATIONS

UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. RoHs compliant.

Design Lights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.slgus.com/DLC to confirm which versions are qualified.

ORDERING GUIDE

EXAMPLE: WM 30 G1 4k

Luminaire Type	Lumen Output*	Generation	Voltage	CCT	Finish	Options
WM Medium LED Wall Pack	30 3,400 Lumens	G1	Blank 120-277V HVVU 347-480V	4K 4000K 5K 5000K	Standard: Blank Dark Bronze Custom: W White***	Blank No Option
	53 5,300 Lumens					P (PC UNV B3) Photocell
	81 8,100 Lumens					EL (EL UNV I) Emergency Battery

Standard driver operates on any line voltage from 120-277V (50/60 Hz).

* Data as report to DLC, actual test results may vary

***For any Finish color other then Dark Bronze, please call for custom order.



SLG Lighting

10643 W. Airport Blvd. Suite 400, Stafford, Texas 77477

Email: support@slgus.com | Phone: (832) 939-8412 | www.slgus.com

WM.V18.10

WL LARGE WALL PACK SERIES



Finish Color



The SLG LED Large Wall Pack offers maximum light output for general purpose area and security lighting. It efficiently delivers lumens, and consumes less energy than traditional wall mount technologies. This versatile luminaire is ideal for replacing existing HID fixtures.




Applications: security, pathway and perimeter lighting, building entryway, walkways, hotel, restaurant parking areas, school institutional, industrial, etc.

Replacement: 320W - 400W MH

PERFORMANCE INFORMATION*

SERIES NUMBER	POWER	DELIVERED LUMENS	CCT
WL 112 G1 4K	90W	10,900 Lumens	4000K
WL 112 G1 5K	90W	11,200 Lumens	5000K
WL 164 G1 4K	135W	15,600 Lumens	4000K
WL 164 G1 5K	135W	16,400 Lumens	5000K

DIMENSIONS

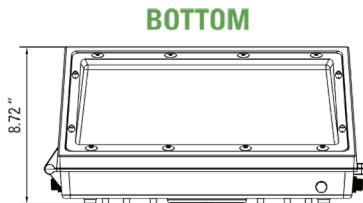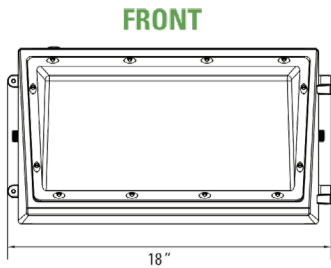

Approximate Weight: 13.3 lbs

Project:	
Catalog No.:	
Fixture Type:	
Notes:	

SPECIFICATIONS

HOUSING

Die-cast aluminum housing and back-housing

AMBIENT TEMPERATURE

Suitable for use in -25°C to +40°C (-13°F to 104°F)

MOUNTING

To J-Box, or surface conduit. Light weight Back box is mounted to the wall, wiring made-up before the lens and front housing.

EFFICACY

Up to 115 lumens per watt (see individual wattage data)

CCT AND CRI

4000K and 5000K CCT available; 70CRI

OPTICS

Vacuum metalized specular reflector. Clear acrylic lens.

WARRANTY

10 year limited warranty. Complete warranty terms located at:

www.slgus.com

ELECTRICAL

High quality constant-current drivers, >90% efficient and rated for either 50/60Hz operation, 120-277V input.

FINISH

Dark Bronze or White polyester powder coat

CERTIFICATIONS

UL Listed for wet locations. Equivalent to IP65 rating. FCC compliant. RoHs compliant.

Design Lights Consortium® (DLC) Premium qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.slgus.com/DLC to confirm which versions are qualified.

ORDERING GUIDE

Luminaire Type	Lumen Output*	Generation	Voltage	CCT	Finish	Options
WL Large LED Wall Pack	112 11,200 Lumens	G1	Blank	4K 4000K	Standard: Blank Dark Bronze	Blank No Option P (PC UNV B3) Photocell EL (EL UNV 1) Emergency Battery
	164 16,400 Lumens**		HVU 347-480V	5K 5000K		

EXAMPLE: WL 104 G1 4k

Standard driver operates on any line voltage from 120-277V (50/60 Hz).

* Data as report to DLC, actual test results may vary

** WL 155 does not have the backup battery option

***For any Finish color other than Dark Bronze, please call for custom order.



SLG Lighting


10643 W. Airport Blvd. Suite 400, Stafford, Texas 77477

Email: support@slgus.com | Phone: (832) 939-8412 | www.slgus.com

WL.V18.10

WS PHOTOMETRIC

WS 38 (12 Feet Mounting)

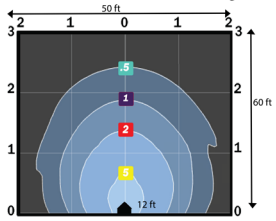


Mounting Height	8	10	12	14	16
Multiplier	2.2	1.4	1.0	0.7	0.6

Grid scales: Multiples of mounting height Values shown in footcandle.

WM PHOTOMETRIC


WM 53 (16 Feet Mounting)



Mounting Height	12	14	16	18	20
Multiplier	1.8	1.3	1.0	0.8	0.6


Grid scales: Multiples of mounting height Values shown in footcandle.

WM 81 (16 Feet Mounting)

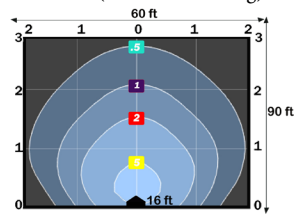


WL PHOTOMETRIC

WL 112 (25 Feet Mounting)



WL 164 (25 Feet Mounting)











Mounting Height	20	25	30	35	40
Multiplier	1.6	1.0	0.7	0.5	0.4

Grid scales: Multiples of mounting height Values shown in footcandle.

ELECTRICAL LOAD

Series Number	Wattage	Current (A)					
		120V	208V	240V	277V	347V	480V
WS 38 G1 4K	30 Watts	0.25	0.14	0.13	0.11	N/A	N/A
WS 38 G1 5K	30 Watts	0.25	0.14	0.13	0.11	N/A	N/A
WM 30 G1 4K	30 Watts	0.25	0.14	0.13	0.11	N/A	N/A
WM 30 G1 5K	30 Watts	0.25	0.14	0.13	0.11	N/A	N/A
WM 53 G1 4K	45 Watts	0.42	0.22	0.19	0.16	N/A	N/A
WM 53 G1 5K	45 Watts	0.42	0.22	0.19	0.16	N/A	N/A
WM 81 G1 4K	70 Watts	0.58	0.34	0.29	0.25	N/A	N/A
WM 81 G1 5K	70 Watts	0.58	0.34	0.29	0.25	N/A	N/A
WL 112 G1 4K	90 Watts	0.75	0.43	0.38	0.32	0.26	0.19
WL 112 G1 5K	90 Watts	0.75	0.43	0.38	0.32	0.26	0.19
WL 164 G1 4K	135 Watts	1.12	0.65	0.56	0.49	0.39	0.28
WL 164 G1 5K	135 Watts	1.12	0.65	0.56	0.49	0.39	0.28

PERFORMANCE COMPARISON

	Product Series	LED Watts	Lumen Output	Lumens Per/Watt	REPLACES	Voltage	DLC
	WS 38	50W	4,050 Lm	81 Lm/W	150W	120-277V	
	WM 53	45W	4,950 Lm	110 Lm/W	175W	120-277V	
	WM 81	70W	7,900 Lm	113 Lm/W	250W	120-277V	
	WL 112	90W	9,950 Lm	111 Lm/W	320W	120-480V	
	WL 164	135W	15,550 Lm	115 Lm/W	400W	120-480V	

Scan for more information



SLG Lighting

10643 W. Airport Blvd. Suite 400, Stafford, Texas 77477
 Email: support@slgus.com | Phone: (832) 939-8412 | www.slgus.com

WSWMWL.V18.10