



HI-LITE MFG. CO., INC.


13450 Monte Vista Avenue
Chino, California 91710
Telephone: (909) 465-1999
Fax: (909) 465-0907

Job Name: _____
Type: _____
Quantity: _____

Item Number	Height (A)	Width (B)
H-15008	7"	8"
H-15010	8"	10"
H-15111	8"	11"
H-15112	8"	12"
H-15113	8"	13"
H-15114	9"	14"
H-15115	9"	15"

Item Number	Height (A)	Width (B)
H-15116	9 1/2"	16"
H-15117	10"	17"
H-15118	11"	18"
H-15120	11"	20"
H-15124	16"	24"
H-15127	18"	27"

Warehouse Shade Collection

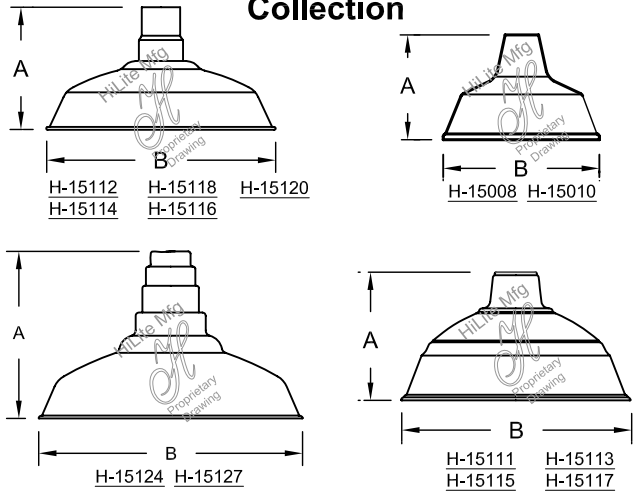

Fixture No.	Fixture Color	Mounting	Mounting Color	Optional Accessories	Accessory Color	Wattage/Lamp options	Ballast	Voltage
H-15008 ⁽¹⁾	Standard ⁽²⁾	Mounting Options	Standard	CGU	Standard	Incandescent (7)	Ballast option not available for INC.	Incandescent
H-15010 ⁽¹⁾	91 (Black)	1/2"	91 (Black)	(Cast guard & glass)	91 (Black)	(Fixture is standard 100W or 200W. Do not specify.)	RB ⁽⁵⁾ (Remote)	(Fixture is standard 120V. Do not specify.)
H-15111 ⁽¹⁾	93 (White)	3/4"	93 (White)	LCGU	93 (White)	CFL (4) (7)	BCM (Canopy Mount)	CFL
H-15112	95 (Dk. Grn)	For H-15006, H-15008, H-15010 and H-15111 only.	95 (Dk. Grn)	(Large cast guard & glass)	95 (Dk. Grn)	(Compact Fluorescent)	PLB ⁽⁶⁾ (Postline)	M (Multi 120/277V)
H-15113 ⁽¹⁾	96 (Galv.)	CB7 (7' Blk Cord)	96 (Galv.)	WGU	96 (Galv.)	13/CFL	For specs see pages 341-343.	HID
H-15114	BR47 (Rust)	CG7 (7' Grey Mesh Cord)	BR47 (Rust)	(Wire guard & glass)	BR47 (Rust)	18/CFL		RB and BCM
H-15115 ⁽¹⁾	Upgraded ⁽²⁾	Cord Options	For all finishes see pages 344-348.	LWGU	For all finishes see pages 344-348.	26/32/42/CFL		M (Multi 120/208/240/277V)
H-15116	Finishes	CB8 (8' Blk Cord)		ARN		26/CFL		PLB
H-15117	29, 66, 82, 90, 92, 94, 97, 99, 100, 103, 104, 105, 110, 112, 113, 114, 115, 117, 118, 119, 120, 127, 128, 129, 133, 134, 135, 136, 138, 139, 140, 11, 98, 101, 102, 137, 121, 122, 123, 124, 125, 126, 01, 22, 25, 33, 77, 89, 24, 44, 48, 49, 15, 16, 55.	CW8 (8' Wht Cord)		LARN		32/CFL		1 (120V)
H-15118		CG8 (8' Gray Mesh Cord)		WGR		42/CFL		2 (277V)
H-15120		Custom Cord Options		SK		57/CFL		
H-15124		CB (Black)		FX		DMB (Dimmable Ballast for CFL. Add to Part No.)		
H-15127		CW (White)		For specs and glass color see pages 321-344.		HID (4) (High Intensity Discharge)		
		CG (Gray Mesh) Specify length.				MH (4) (7) (Metal Halide)		
		Stem Options (Stem 1/2")				35/MH		
		ST Specify length and canopy.				50/MH		
		HSC (Canopy)				70/MH		
		SMC (Canopy)				100/MH		
		Flush Mount Options				150/MH		
		FHSC				175/MH		
		FSMC				HPS (4) (7) (High Pressure Sodium)		
		Arm Options				50/HPS		
		B-1 HL-K				70/HPS		
		HL-A HL-U				100/HPS		
		HL-H P-1				150/HPS		
		HL-C P-3				LED		
		HL-D				20W	LED See specifications for complete part number.	LED See specifications for complete part number.
		For all arms and specs see pages 321-344				30W		

H-15117 - 91 / 1/2" - 91 / CGU-CLR - 91 / 13/CFL - BCM - M

ORDER EXAMPLE (USE THIS FORMAT TO PLACE ORDER)

Notes:

- (1) H-15008, H-15010, H-15111, 15113 and H-15115 available for 100W Max INC. H-15008 and H-15010 not available with glass enclosures.
- (2) For interior finish of fixture refer to color chart on pages 344-348. H-15124 and H-15127 not available in copper or brass finish.
- (3) Cord Mounting wattage not to exceed 100 for HID. Gray Mesh Cord not available for HID.
- (4) Requires Globe Option. (See pages 339-341 for Globe Options) Max Wattages for CGU and WGU are 100W INC, 32W CFL and 100W HID Max Wattages for LWGU, LCGU, ARN and LARN are 200W INC, 57W CFL, 175W HID and no changes.
- (5) (RB) Remote Ballast not available for Fluorescent Lamping.
- (6) (PLB) Post Line Ballast must specify 120V or 277V. (PLB) 50W MH requires a 3" dia. pole. (PLB) 70W and 100W MH require a 4" dia. pole. (PLB) 50W, 70W, 100W and 150W HPS require a 3" dia. pole.
- (7) Socket Bases: INC and HID are medium base, CFL are GX24Q.

Suitable for wet location.
(Except when cord mounted)