



LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		DA

## Newport Outdoor LED Sconce NWPW Series

### Features

All purpose LED sconce is an energy saving long-lasting alternative to Incandescent. Ideal use for security and general lighting. Provides lighting in residential, commercial, retail and hospitality applications. Fixture must be mounted to a standard junction box (not included) on a wall.

### Construction

Housing is made from die-cast aluminum with a durable powder coating finish. Power supply connections must be made inside a junction box (not included).

### Finish

Bronze Patina coated finish.

### Diffuser

Frosted glass.

### Electrical

Input 120 VAC/60 Hz .08A  
Minimum starting temp -4° F/-20° C

### LED

Integrated LED modules capable of producing:  
10W = 880 source lumens, 500 delivered lumens  
3000K (CCT.) Rated for 50,000 Hrs., 80 CRI.

### Certification

cETLus certified for outdoor wet locations.


### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date-of-purchase.

**Specifications and dimensions  
subject to change without notice.**

## Ordering Information:

Bronze Patina	LED	Source Lumens	Delivered Lumens	CCT	H	W	D
NWPW041409L30ENBP	10W	880	500	3000K	13-3/4"	4-3/4"	3-1/2"

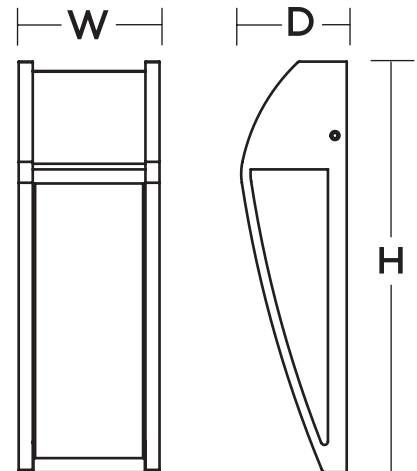

## DESCRIPTION

The patented Lumark Crosstour™ MAXX LED wall pack series of luminaires provides low-profile architectural style with super bright, energy-efficient LEDs. The rugged die-cast aluminum construction, back box with secure lock hinges, stainless steel hardware along with a sealed and gasketed optical compartment make Crosstour impervious to contaminants. The Crosstour MAXX wall luminaire is ideal for wall/surface, inverted mount for facade/canopy illumination, perimeter and site lighting. Typical applications include pedestrian walkways, building entrances, multi-use facilities, industrial facilities, perimeter parking areas, storage facilities, institutions, schools and loading docks.

## SPECIFICATION FEATURES

### Construction

Low-profile LED design with rugged one-piece, die-cast aluminum back box and hinged removable door. Matching housing styles incorporate both a full cutoff and refractive lens design. Full cutoff and refractive lens models are available in 58W, 81W and 102W. Patent pending secure lock hinge feature allows for safe and easy tool-less electrical connections with the supplied push-in connectors. Back box includes four 1/2" NPT threaded conduit entry points. The back box is secured by four lag bolts (supplied by others). External fin design extracts heat from the fixture surface. One-piece silicone gasket seals door and back box. Not recommended for car wash applications.

### Optical

Silicone sealed optical LED chamber incorporates a custom engineered reflector providing high-efficiency illumination. Full cutoff models integrate an impact-resistant molded refractive prism optical lens assembly meeting requirements for Dark Sky compliance. Refractive lens models incorporate a molded lens

assembly designed for maximum forward throw. Solid state LED Crosstour MAXX luminaires are thermally optimized with eight lumen packages in cool 5000K, neutral 4000K, or warm 3000K LED color temperature (CCT).

### Electrical

LED driver is mounted to the die-cast aluminum housing for optimal heat sinking. LED thermal management system incorporates both conduction and natural convection to transfer heat rapidly away from the LED source. 58W, 81W and 102W models operate in -40°C to 40°C [-40°F to 104°F]. High ambient 50°C [122°F] models available in 58W and 81W models only. Crosstour MAXX luminaires maintain greater than 89% of initial light output after 72,000 hours of operation. Four half-inch NPT threaded conduit entry points allow for thru-branch wiring. Back box is an authorized electrical wiring compartment. Integral LED electronic driver incorporates surge protection. 120-277V 50/60Hz, 480V 60Hz, or 347V 60Hz electrical operation. 480V is compatible for use with 480V Wye systems only.

### Emergency Egress

Optional integral cold weather battery emergency egress includes emergency operation test switch (available in 58W and 81W models only), an AC-ON indicator light and a premium extended rated sealed maintenance-free nickel-metal hydride battery pack. The separate emergency lighting LEDs are wired to provide redundant emergency lighting. Listed to UL Standard 924, Emergency Lighting.

### Finish

Crosstour MAXX is protected with a super TGIC carbon bronze or summit white polyester powder coat paint. Super TGIC powder coat paint finishes withstand extreme climate conditions while providing optimal color and gloss retention of the installed life.

### Warranty

Five-year warranty.



## XTOR CROSSTOUR MAXX LED

APPLICATIONS:  
WALL / SURFACE  
INVERTED  
SITE LIGHTING



### CERTIFICATION DATA

UL/cUL Wet Location Listed  
Dark Sky Approved (Fixed mount, Full cutoff, and 3000K CCT only)  
DesignLights Consortium® Qualified\*  
LM79 / LM80 Compliant  
ROHS Compliant  
NOM Compliant Models  
3G Vibration Tested  
UL924 Listed (CBP Models)  
IP66 Rated

### TECHNICAL DATA

40°C Ambient Temperature  
External Supply Wiring 90°C Minimum

### EPA

Effective Projected Area (Sq. Ft.):  
XTOR6B, XTOR8B, XTOR12B=0.54


### SHIPPING DATA:

Approximate Net Weight:  
12-15 lbs. [5.4-6.8 kgs.]


TD514005EN  
November 30, 2020 1:59 PM

## DIMENSIONS


### FULL CUTOFF

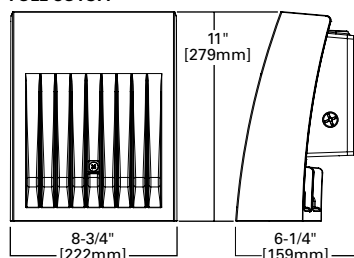


### DEEP BACK BOX




### REFRACTIVE LENS



### DEEP BACK BOX



## ESCUTCHEON PLATES




**POWER AND LUMENS BY FIXTURE MODEL**

58W Series						
LED Information	XTOR6B	XTOR6BRL	XTOR6B-W	XTOR6BRL-W	XTOR6B-Y	XTOR6BRL-Y
Delivered Lumens	6,129	6,225	6,038	6,133	5,611	5,826
B.U.G. Rating	B1-U0-G1	B2-U4-G3	B1-U0-G1	B2-U4-G3	B1-U0-G1	B2-U4-G3
CCT (Kelvin)	5000K	5000K	4000K	4000K	3000K	3000K
CRI (Color Rendering Index)	70	70	70	70	70	70
Power Consumption (Watts)	58W	58W	58W	58W	58W	58W
81W Series						
LED Information	XTOR8B	XTOR8BRL	XTOR8B-W	XTOR8BRL-W	XTOR8B-Y	XTOR8BRL-Y
Delivered Lumens	8,502	8,635	8,373	8,504	7,748	8,079
B.U.G. Rating	B2-U0-G1	B2-U4-G3	B2-U0-G1	B2-U4-G3	B2-U0-G1	B2-U4-G3
CCT (Kelvin)	5000K	5000K	4000K	4000K	3000K	3000K
CRI (Color Rendering Index)	70	70	70	70	70	70
Power Consumption (Watts)	81W	81W	81W	81W	81W	81W
102W Series						
LED Information	XTOR12B	XTOR12BRL	XTOR12B-W	XTOR12BRL-W	XTOR12B-Y	XTOR12BRL-Y
Delivered Lumens	12,728	13,458	12,539	13,258	11,861	12,595
B.U.G. Rating	B2-U0-G1	B2-U4-G3	B2-U0-G1	B2-U4-G3	B2-U0-G1	B2-U4-G3
CCT (Kelvin)	5000K	5000K	4000K	4000K	3000K	3000K
CRI (Color Rendering Index)	70	70	70	70	70	70
Power Consumption (Watts)	102W	102W	102W	102W	102W	102W
EGRESS Information	XTOR6B and XTOR8B Full Cutoff CBP Egress LED			XTOR6B and XTOR8B Refractive Lens CBP Egress LED		
Delivered Lumens	509			468		
B.U.G. Rating	N.A.			N.A.		
CCT (Kelvin)	4000K			4000K		
CRI (Color Rendering Index)	65			65		
Power Consumption (Watts)	1.8W			1.8W		

**LUMEN MAINTENANCE**

Ambient Temperature	TM-21 Lumen Maintenance (72,000 Hours)	Theoretical L70 (Hours)
<b>XTOR6B Model</b>		
25°C	> 90%	246,000
40°C	> 88%	217,000
50°C	> 88%	201,000
<b>XTOR8B Model</b>		
25°C	> 89%	219,000
40°C	> 87%	195,000
50°C	> 86%	181,000
<b>XTOR12B Model</b>		
25°C	> 89%	222,000
40°C	> 87%	198,000

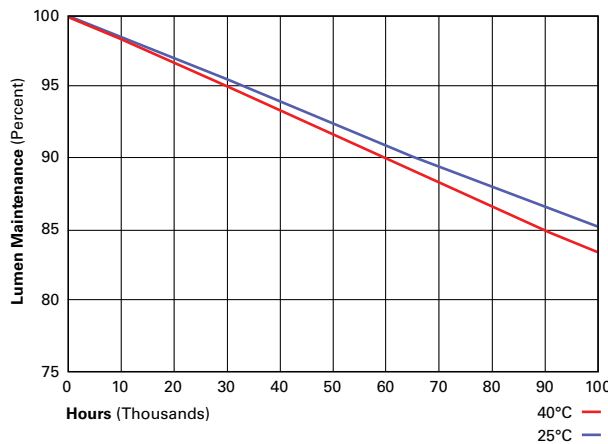

**CURRENT DRAW**

Voltage	Model Series				
	XTOR6B	XTOR8B	XTOR12B	XTOR6B-CBP (Fixture/Battery)	XTOR8B-CBP (Fixture/Battery)
120V	0.51	0.71	0.94	0.60/0.25	0.92/0.25
208V	0.25	0.39	0.52	--	--
240V	0.25	0.35	0.45	--	--
277V	0.22	0.31	0.39	0.36/0.21	0.50/0.21
347V	0.19	0.25	0.33		--
480V	0.14	0.19	0.24		--



Cooper Lighting Solutions  
 1121 Highway 74 South  
 Peachtree City, GA 30269  
 P: 770-486-4800  
 www.cooperlighting.com

Specifications and dimensions subject to change without notice.

**ORDERING INFORMATION**

Sample Number: XTOR6B-W-WT-PC1

Series <sup>1</sup>	LED Kelvin Color	Housing Color	Options (Add as Suffix)
<b>Full Cutoff</b> <b>XTOR6B=58W</b> XTOR8B=81W XTOR12B=102W  <b>Refractive Lens</b> XTOR6BRL=58W XTOR8BRL=81W XTOR12BRL=102W	[Blank]=Bright White (Standard) 5000K <b>W=Neutral, 4000K</b> Y=Warm, 3000K	[Blank]=Carbon Bronze (Standard) WT=Summit White BK=Black <b>BZ=Bronze</b> AP=Grey GM=Graphite Metallic DP=Dark Platinum	347V=347V <sup>2,3,4,5</sup> 480V=480V <sup>2,3,4,5,6</sup> PC1=Photocontrol 120V <sup>7</sup> PC2=Photocontrol 208-277V <sup>7,8</sup> MS-L20=Motion Sensor for ON/OFF Operation <sup>2,3,9,10</sup> MS/DIM-L20=Motion Sensor for Dimming Operation <sup>2,3,9,10,11,12,13</sup> CBP=Cold Weather Battery Pack <sup>2,3,14,15,16</sup> HA=50°C High Ambient <sup>16</sup>
<b>Accessories (Order Separately)</b>			
WG-XTORMX=Crosstour MAXX Wire Guard PB120V=Field Installed 120V Photocontrol PB277V BUTTON PC=Field Installed 208-277V Photocontrol <sup>8</sup>		EWP/XTORMX=Escutcheon Wall Plate, Carbon Bronze EWP/XTORMX-WT=Escutcheon Wall Plate, Summit White FSIR-100=Wireless Configuration Tool for Occupancy Sensor <sup>13</sup>	

- NOTES:**
- DesignLights Consortium® Qualified and classified for both DLC Standard and DLC Premium, refer to www.designlights.org for details.
  - Not available with HA option.
  - Deep back box is standard for 347V, 480V, CBP, MS-L20 and MS/DIM-L20.
  - Not available with CBP option.
  - Thru-branch wiring not available with HA option or with 347V.
  - Only for use with 480V Wye systems. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems).
  - Not available with MS-L20 and MS/DIM-L20 options.
  - Use PC2 with 347V or 480V option for photocontrol. Factory wired to 208-277V lead.
  - For use in downlight orientation only. Optimal coverage at mounting heights of 9'-20'.
  - 120V thru 277V only.
  - Factory set to 50% power reduction after 15-minutes of inactivity. Dimming driver included.
  - Includes integral photo sensor.
  - The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff, and more. Consult your lighting representative at Cooper Lighting Solutions for more information.
  - 120V or 277V operation only.
  - Operating temperatures -20°C to 25°C.
  - Not available in XTOR12B or XTOR12BRL models.

**STOCK ORDERING INFORMATION**

58W Series	81W Series	102W Series
<b>Full Cutoff</b>		
XTOR6B=58W, 5000K, Carbon Bronze	XTOR8B=81W, 5000K, Carbon Bronze	XTOR12B=102W, 5000K, Carbon Bronze
XTOR6B-PC1=58W, 5000K, 120V PC, Carbon Bronze	XTOR8B-PC1=81W, 5000K, 120V PC, Carbon Bronze	
XTOR6B-WT= 58W, 5000K, Summit White	XTOR8B-WT=81W, 5000K, Summit White	
XTOR6B-W=58W, 4000K, Carbon Bronze	XTOR8B-PC2=81W, 5000K, 208-277V PC, Carbon Bronze	
XTOR6B-PC2= 58W, 5000K, 208-277V PC, Carbon Bronze	XTOR8B-347V=81W, 5000K, Carbon Bronze, 347V	
<b>Refractive Lens</b>		
XTOR6BRL=58W, 5000K, Refractive Lens, Carbon Bronze	XTOR8BRL=81W, 5000K, Refractive Lens, Carbon Bronze	XTOR12BRL=102W, 5000K, Refractive Lens, Carbon Bronze
XTOR6BRL-PC1=58W, 5000K, Refractive Lens, 120V PC, Carbon Bronze	XTOR8BRL-PC1=81W, 5000K, Refractive Lens, 120V PC, Carbon Bronze	XTOR12BRL-W=102W, 4000K, Refractive Lens, Carbon Bronze
XTOR6BRL-WT=58W, 5000K, Refractive Lens, Summit White	XTOR8BRL-WT=81W, 5000K, Refractive Lens, Summit White	XTOR12BRL-347V=102W, 5000K, Refractive Lens, Carbon Bronze, 347V
XTOR6BRL-W=58W, 4000K, Refractive Lens, Carbon Bronze	XTOR8BRL-PC2=81W, 5000K, Refractive Lens, 208-277V PC, Carbon Bronze	
XTOR6BRL-PC2=58W, 5000K, Refractive Lens, 208-277V PC, Carbon Bronze	XTOR8BRL-W=81W, 4000K, Refractive Lens, Carbon Bronze	
XTOR6BRL-347V=58W, 5000K, Refractive Lens, Carbon Bronze, 347V	XTOR8BRL-347V = 81W, 5000K, Refractive Lens, Carbon Bronze, 347V	

BYRON  
EW3506

WALL

PROJECT


DJ

DESCRIPTION

Die-cast aluminum with powder-coated finish and glass diffuser.  
Available in Black and gray



EW3506-GY  
Gray




EW3506-BK  
Black

SPECIFICATION DETAILS

\* For custom options, consult factory for details.

Fixture Dimensions	D6-1/4" x E3-3/4"
Light Source	AC LED Module
Wattage	5W
Total Lumens	400lm
Delivered Lumens	BK-127lm
Voltage	120V
Color Temperature	3000K
CRI (Ra)	90CRI
Optional Color Temps	2700K - 5000K Available, Minimum Order Quantities Apply
LED Rated Life	50,000 hours
Dimming	100% - 10%, ELV Dimmer (Not Included)
Glass Details	Frosted Glass
ADA Compliant	Yes
Location	Wet
Compliance	ADA
Warranty	5 Years

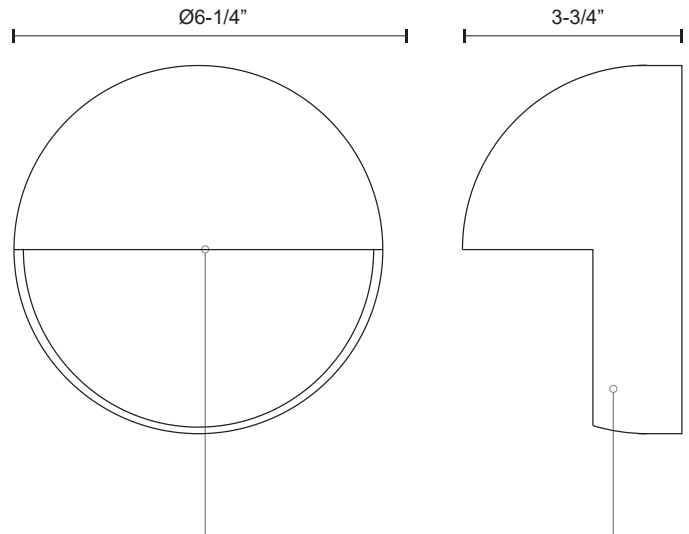

Wet location listed  
round down light

Metal Finish  
BK - Black  
GY - Gray

KUZCO

19054 28TH AVENUE  
SURREY - BC V3Z 6M3  
CANADA


WWW.KUZCOLIGHTING.COM

COMMENT

Empty comment box.



Project		Catalog #		Type	
Prepared by		Notes		Date	

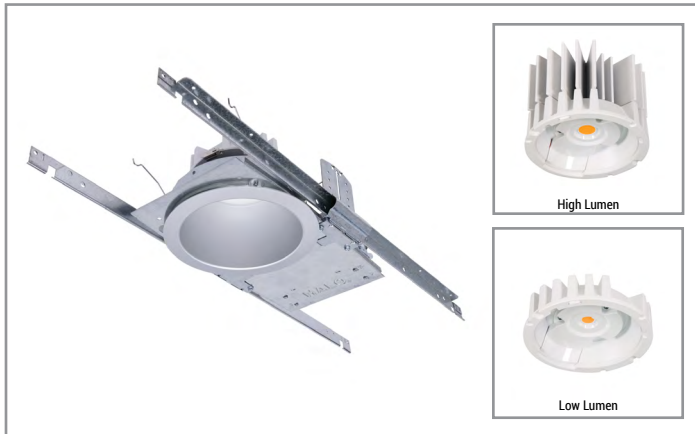

# HALO Commercial

## HC6 | HM6 | 61 | 61PS

6-inch LED new construction/remodel regressed lens downlight and wall wash

### Typical Applications

Office • Healthcare • Hospitality • Institutional • Mixed-Use/Retail

### Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 4](#)
- Photometric Data [page 5](#)
- Energy & Performance Data [page 8](#)
- Connected Systems [page 9](#)
- Product Warranty

### Product Certification




### Product Features

### Top Product Features

- New construction/remodel series; 1,000 to 4,000 lumens
- Narrow, Medium and Wide distributions; Wall wash with rotatable linear spread lens
- 2700K, 3000K, 3500K and 4000K CCT; 80 or 90 CRI
- Universal voltage 120V-277V; Standard 0-10V driver dims to 1%
- Two retrofit kits install from below ceiling for LED upgrades

### Dimensional and Mounting Details

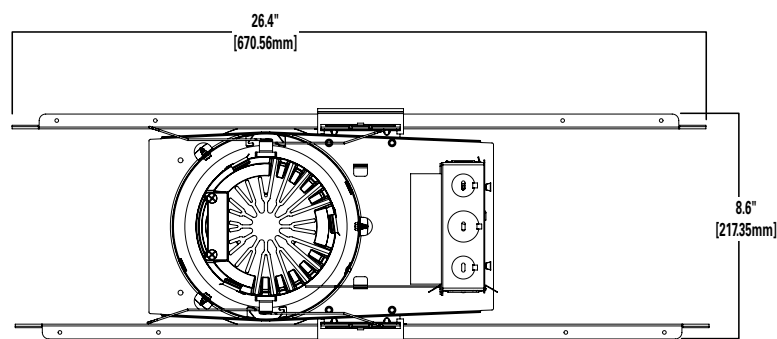

[additional product diagrams](#)

## Order Information

Sample Number: HC620D010REM7 – HM612835 - 61MDC

A complete luminaire consists of a housing frame, LED module, and reflector (ordered separately)

Mounting Frame	Lumens	Input / Control	Factory Installed Options	Accessories
<p><b>HC6</b> = 6" new construction and remodeler housing</p> <p><b>HC6CP</b> = 6" new construction and remodeler housing, CCEA Chicago Plenum rated</p>	<p><b>10</b> = 1000 lumens (nominal)</p> <p><b>15</b> = 1500 lumens (nominal)</p> <p><b>20</b> = 2000 lumens (nominal)</p> <p><b>30</b> = 3000 lumens (nominal)</p> <p><b>40</b> = 4000 lumens (nominal)</p>	<p><b>D010</b> = 120-277VAC 50/60Hz 0-10V analog 1%-100% dimming</p> <p><b>D010347</b> = 347VAC 50/60Hz 0-10V analog 1%-100% dimming (Canada only) <sup>1</sup></p> <p><b>DLV</b> = Distributed Low Voltage driver, 1%-100% dimming DLV for use with DLVP system only. Refer to DLVP low-voltage power module and DLVP specifications for details.<sup>(1)</sup></p>	<p><b>REM7</b> = 7 watt emergency module with remote test / indicator light, use with D010 only <sup>1</sup></p> <p><b>REM14</b> = 14 watt emergency module with remote test / indicator light, use with D010 only <sup>1</sup></p> <p><b>IEM7</b> = integral 7 watt emergency module with integral test / indicator light, use with D010 only <sup>1</sup></p> <p><b>IEM14</b> = integral 14 watt emergency module with integral test / indicator light, use with D010 only <sup>1</sup></p> <p><b>BOD7ST</b> = 7.5 watt Bodine self-test diagnostic emergency module with remote test / indicator light, use with D010 only <sup>(1)</sup></p> <p><b>WTA</b> = Factory installed WaveLinX tile mount sensor Kit <sup>(1)(6)</sup></p> <p><b>WTK</b> = Factory installed WaveLinX Lite Sensor Kit <sup>(1)(6)</sup></p> <p><b>REM7V</b> = 7 watt emergency module with remote test / indicator light, use with DLV only <sup>1,2</sup></p> <p><b>REM14V</b> = 14 watt emergency module with remote test / indicator light, use with DLV only <sup>1,2</sup></p> <p><b>IEM7V</b> = integral 7 watt emergency module with integral test / indicator light, use with DLV only <sup>1,2</sup></p> <p><b>IEM14V</b> = integral 14 watt emergency module with integral test / indicator light, use with DLV only <sup>1,2</sup></p>	<p><b>HB128APK</b> = L channel hanger bar, 26", pair (replacement)</p> <p><b>RMB22</b> = Adjustable wood joist mounting bars, pair, extend to 22" long</p> <p><b>HS6A</b> = Slope Adapter for 6" Aperture Housings, Specify Slope (refer to instructions for installation of housing and trim)</p> <p><b>H347</b> = 347 to 120V step down transformer, 75VA</p> <p><b>H347200</b> = 347 to 120V step down transformer, 200VA</p> <p><b>WTA</b> = Field installed WaveLinX tile mount sensor Kit <sup>1,5</sup></p> <p><b>WTK</b> = Field installed WaveLinX Lite Sensor Kit <sup>(1)(6)</sup></p>
Notes	Notes	Notes	Notes	Notes
		(1) Not available with CP version	(1) Not available with CP version (2) ULus for U.S. only (5) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX system specifications) (6) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite system specifications)	(1) Not available with CP version (5) WTA = WaveLinX tile mount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only (Refer to WaveLinX system specifications) (6) WTK = WaveLinX Lite tile mount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinX Lite system specifications)

LED Module	Lumens	CRI/CCT
<p><b>HM6</b> = 6" LED module</p>	<p><b>12</b> = 1000, 1500 and 2000 lumens (nominal), use with HC610*, HC615*, HC620* housings</p> <p><b>34</b> = 3000 and 4000 lumens (nominal), use with HC630*, HC640* housings</p>	<p><b>827</b> = 80 CRI (minimum), 2700K CCT</p> <p><b>830</b> = 80 CRI (minimum), 3000K CCT</p> <p><b>835</b> = 80 CRI (minimum), 3500K CCT</p> <p><b>840</b> = 80 CRI (minimum), 4000K CCT</p> <p><b>927</b> = 90 CRI (minimum), 2700K CCT</p> <p><b>930</b> = 90 CRI (minimum), 3000K CCT</p> <p><b>935</b> = 90 CRI (minimum), 3500K CCT</p> <p><b>940</b> = 90 CRI (minimum), 4000K CCT</p>
Notes	Notes	Notes

Reflector	Distribution	Finish	Flange	Accessories
<p><b>61</b> = 6" conical reflector</p>	<p><b>ND</b> = narrow 55° beam angle 0.97 SC</p> <p><b>MD</b> = medium 60° beam angle 1.10 SC</p> <p><b>WD</b> = wide 65° beam angle 1.28 SC</p> <p><b>RWW</b> = rotatable wall wash with linear spread lens</p>	<p><b>C</b> = Specular clear</p> <p><b>H</b> = Semi-specular clear</p> <p><b>W</b> = White</p>	<p><b>Blank</b> = Polished flange standard with C &amp; H reflectors</p> <p><b>Blank</b> = White flange standard with W reflector</p> <p><b>WF</b> = White flange option available with C &amp; H reflectors</p>	<p><b>61RWWPK</b> = rotatable wall wash insert for 6" reflector –replacement part kit</p>
Notes	Notes	Notes	Notes	Notes
	(3) Values are nominal, with specular clear reflector, other finishes and field results may vary.			

Baffle	Distribution	Finish	Flange	Accessories
<p><b>61</b> = 6" baffle reflector</p>	<p><b>WD</b> = wide 65° beam angle 1.28 SC (nominal)</p> <p><b>RWW</b> = rotatable wall wash with linear spread lens</p>	<p><b>BB</b> = Black baffle</p> <p><b>WB</b> = White baffle</p>	<p><b>Blank</b> = White flange standard with BB, &amp; WB</p> <p><b>BF</b> = Black flange option available with BB</p>	<p><b>61RWWPK</b> = rotatable wall wash insert for 6" reflector –replacement part kit</p>
Notes	Notes	Notes	Notes	Notes
	(3) Values are nominal, with specular clear reflector, other finishes and field results may vary.			

## Order Information

IEM Reflector	Distribution	Finish	Flange	Integral Emergency
IEM Reflector	Distribution <sup>3</sup>	Finish	Flange	Integral Emergency
61 = 6" IEM reflector for integral emergency only	ND = narrow 55° beam angle 0.97 SC MD = medium 60° beam angle 1.10 SC WD = wide 65° beam angle 1.28 SC	C = Specular clear H = Semi-specular clear W = White	Blank = Polished flange standard with C & H reflectors Blank = White flange standard with W reflector WF = White flange option available with C & H reflectors	IEM = Reflector for integral emergency only
Notes	Notes (3) Values are nominal, with specular clear reflector, other finishes and field results may vary.	Notes	Notes	Notes

IEM Baffle	Distribution	Finish	Flange	Integral Emergency
IEM Baffle	Distribution <sup>3</sup>	Finish	Flange	Integral Emergency
61 = 6" IEM baffle reflector for integral emergency only	WD = wide 65° beam angle 1.28 SC (nominal)	BB = Black baffle WB = White baffle	Blank = White flange standard with BB, & WB BF = Black flange option with BB	IEM = Reflector for integral emergency only
Notes	Notes (3) Values are nominal, with specular clear reflector, other finishes and field results may vary.	Notes	Notes	Notes

Reflector	Distribution	Finish	Flange
Reflector	Distribution <sup>3</sup>	Finish	Flange
61PS = 6" non-conductive polymer 'dead front' conical reflector <sup>4</sup>	MD = medium 60° beam angle 1.10 SC (nominal)	W = White	Blank = White flange standard with W reflector
Notes (4) 61PS reflector is for Non-IC environment only, and up to 3000 lumens only.	Notes (3) Values are nominal, with specular clear reflector, other finishes and field results may vary.	Notes	Notes



## Product Specifications

### Housing Frame

- Boat shaped galvanized steel plaster frame with adjustable plaster lip
- Accommodates 1/2" to 1-1/2" thick ceilings
- Installs in new construction or from below the finished ceiling (non-accessible) for remodeling (with mounting bars removed)
- Provided with two remodel clips to secure the frame to the ceiling

### Universal Mounting Bracket

- Adjusts 2" vertically from above and below the ceiling
- Use with the included mounting bars or with 1/2" Electric Metallic Tube (EMT)
- Removable to facilitate remodeling installation from below the finished ceiling

### Mounting Bars

- Captive pre-installed No Fuss™ mounting bars lock to T-grid with screwdriver or pliers
- Centering detents allow for consistent positioning of fixtures

### LED Module

- Proximity phosphors over chip on board LEDs provide a uniform source with high efficiency and no pixilation
- Available in 80 or 90 color rendering index (CRI)
- Color accuracy within 3 SDCM provides color consistency and uniformity
- 90 CRI option: R9>50 (refer to chromaticity information for details)
- Available in 2700K, 3000K, 3500K and 4000K correlated color temperature (CCT)
- Lumen options include 1,000, 1,500, 2,000, 3,000 and 4,000 lumens (nominal)
- Passive thermal management achieves 60,000 hours at 70% lumen maintenance (L70) in insulated ceilings (IC) and non-IC applications
- Integral diffuse lens provides visual shielding
- Integral connector allows quick connection to housing flex

### Reflector

- Self-flanged aluminum reflectors available in narrow, medium or wide distribution patterns
- Medium distribution polymer non-conductive matte white reflector may be used to meet local codes for 'dead front' applications (Non-IC, 3,000 lumens max.)
- Wall wash reflector features a rotatable linear spread lens for alignment of vertical illumination
- Reflectors attach to LED module with three speed clamps
- Available in multiple painted or plated finishes

### Reflector/Module Retention

- Reflector/module assembly is securely retained in the housing with two torsion springs

### Driver

- Field-replaceable constant current driver provides low noise operation
- Universal 120-277VAC 50/60Hz input standard
- 347VAC 50/60Hz input option (Canada only)
- Continuous, 1% to 100% dimming with 0-10V analog control
- Optional low-voltage DC driver for use with Distributed Low Voltage Power (DLVP) system
- Distributed Low Voltage Power (DLVP) system combines power, lighting and controls with ease of installation (refer to DLVP Design Guide at [www.cooperlighting.com](http://www.cooperlighting.com) for details)

### Emergency Option

- Provides 90 minutes of standby lighting, meeting most life safety codes for egress lighting
- Available with integral or remote charge indicator and test switch
- Available Self-Test (self-diagnostic) with remote charge indicator and test switch

### Connected Lighting System Options

Two WaveLinx connected systems to choose. Summary information provided below, refer to WaveLinx system specifications and application guides for details.

#### WaveLinx Wireless System Tilemount Sensor Kit

- WaveLinx Wireless WTA tile mount sensor kit offers daylight dimming, PIR motion sensing, scene and zone configuration, automatic commissioning; and optional RLTS - Real Time Location Services available.

#### WaveLinx Lite System Tilemount Sensor Kit

- WaveLinx Lite WTK tile mount sensor kit offers daylight dimming and PIR motion sensing, scene and grouping configuration.

#### WaveLinx Tilemount Kits Application

- The WTA and WTK tilemount kits include a control module mounted on the luminaire junction box via 1/2" knock-out, and a tilemount sensor on 54-inch whip; for ceiling installation by direct-mount spring clips or via mounting bracket in octagon ceiling boxes.
- The WTA and WTK tilemount kits may be ordered as factory installed on the luminaire, or ordered separately as a field installed accessory kit.

### Junction Box

- Galvanized steel junction box
- 20 in³ internal volume excluding voltage barrier
- 25 in³ internal total volume
- Voltage barrier for 0-10V dimming wires (occupies one 1/2" pry-out space)
- Listed for eight #12 AWG (four in, four out) 90°C conductors and feed-thru branch wiring
- Three 1/2" and two 3/4" trade size pry-outs available
- Three 4-port push wire nuts for mains voltage with 1-port for fixture connection

### Compliance

- cULus damp and wet location listed in protected ceilings
  - IP20 - Above finished ceiling; IP65 - Below finished ceiling
  - Non-Insulated ceiling (Non-IC) rated for 3,000 and 4,000 lumen models (insulation must be kept 3" from top and sides)
  - Insulated ceiling (IC) rated for 1,000, 1,500 and 2,000 lumen models and suitable for direct contact with air permeable insulation\* (IC models are also suitable for Non-IC installations)
  - Airtight per ASTM-E283-04
  - Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements
  - EMI/RFI emissions FCC CFR Title 47 Part 15 Class A at 120/277V
  - Contains no mercury or lead and RoHS compliant
  - Photometric testing completed in accordance of IES LM-79-08
  - Lumen maintenance projection in accordance of IES LM-80-08 and TM-21-11
  - 1,000, 1,500 and 2,000 lumen, 90 CRI, ICAT models may be used to comply with State of California Title 24 residential code, per JA8 certification standards
  - May be used to comply with State of California Title 24 non-residential code as a dimmable LED luminaire
  - ENERGY STAR® certified, reference certified light fixtures database
- \*Not for use in direct contact with spray foam insulation, consult NEMA LSD57-2013

### Warranty



- Five year limited warranty, consult website for details. [www.cooperlighting.com/legal](http://www.cooperlighting.com/legal)


## Photometric Data

 View IES files

### NARROW DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

NARROW (55° BEAM*)	
Test Number	P285970
Housing	HC620D010
Module	HM612835
Reflector	61NDC
Lumens	1920 Lm
Efficacy	96 Lm/W
SC	0.97
UGR	11.7

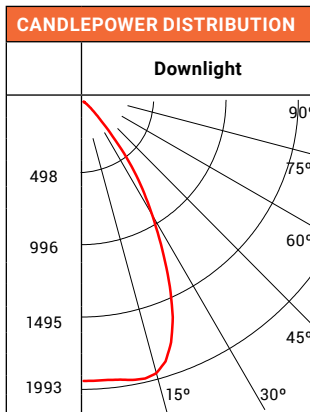CONE OF LIGHT				
				
MH	FC	L	W	
5.5'	64.9	5.2	5.2	
7'	40	6.8	6.8	
8'	30.7	7.6	7.6	
9'	24.2	8.6	8.6	
10'	19.6	9.6	9.6	
12'	13.6	11.6	11.6	


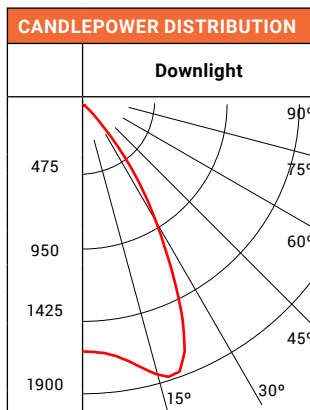
CANDELA TABLE	
Degrees Vertical	Candela
0	1962
5	1962
15	1975
25	1434
35	671
45	112
55	13
65	3
75	3
85	0
90	0


ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1385	72.1
0-40	1796	93.5
0-60	1915	99.7
0-90	1920	100
90-180	0	0
0-180	1920	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	8706
55	1223
65	337
75	551
85	0

### MEDIUM DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

MEDIUM (60° BEAM*)	
Test Number	P286170
Housing	HC620D010
Module	HM612835
Reflector	61MDC
Lumens	1959 Lm
Efficacy	97.9 Lm/W
SC	1.10
UGR	11.8

CONE OF LIGHT				
				
MH	FC	L	W	
5.5'	55.2	5.8	5.8	
7'	34.1	7.6	7.6	
8'	26.1	8.6	8.6	
9'	20.6	9.6	9.6	
10'	16.7	10.8	10.8	
12'	11.6	13	13	


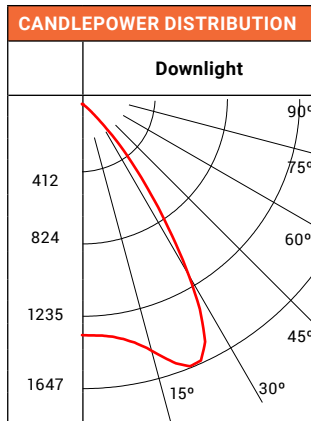
CANDELA TABLE	
Degrees Vertical	Candela
0	1642
5	1660
15	1854
25	1576
35	699
45	120
55	15
65	5
75	3
85	0
90	0


ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1387	70.8
0-40	1821	93
0-60	1951	99.6
0-90	1959	100
90-180	0	0
0-180	1959	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	9236
55	1462
65	662
75	551
85	0

## WIDE DISTRIBUTION SPREAD CLEAR FINISH | 3600 LUMEN MODEL | 30, 35, 40, 45, 50, 55, 60, 65, 70, 75, 80, 85, 90, 95, 100, 110, 120, 130, 140, 150, 160, 170, 180, 190, 200, 210, 220, 230, 240, 250, 260, 270, 280, 290, 300, 310, 320, 330, 340, 350, 360, 370, 380, 390, 400, 410, 420, 430, 440, 450, 460, 470, 480, 490, 500, 510, 520, 530, 540, 550, 560, 570, 580, 590, 600, 610, 620, 630, 640, 650, 660, 670, 680, 690, 700, 710, 720, 730, 740, 750, 760, 770, 780, 790, 800, 810, 820, 830, 840, 850, 860, 870, 880, 890, 900, 910, 920, 930, 940, 950, 960, 970, 980, 990, 1000

WIDE (65° BEAM*)	
Test Number	P286370
Housing	HC620D010
Module	HM612835
Reflector	61WDC
Lumens	2045 Lm
Efficacy	102.3 Lm/W
SC	1.28
UGR	11.6

CONE OF LIGHT			
			
MH	FC	L	W
5.5'	44.3	7	7
7'	27.4	8.8	8.8
8'	21	10.2	10.2
9'	16.6	11.4	11.4
10'	13.4	12.6	12.6
12'	9.3	15.2	15.2

CANDELA TABLE	
Degrees Vertical	Candela
0	1341
5	1349
15	1466
25	1642
35	877
45	201
55	28
65	5
75	2
85	0
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1282	62.7
0-40	1835	89.7
0-60	2037	99.6
0-90	2045	100
90-180	0	0
0-180	2045	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	15614
55	2676
65	662
75	530
85	0

\*Value are nominal with specular clear reflectors, other finishes and field results may vary.  
 SC = Spacing Criteria  
 UGR = Unified Glare Rating

### Photometric Multipliers (Nominal Lumen Values)

1000 Lumen	1500 Lumen	2000 Lumen	3000 LUMEN	4000 LUMEN
0.52	0.72	1.00	1.44	2.02

Multipliers for relative lumen values with other series models.

### Color Finish Multipliers

Finish code	C	H	W/WB	BB
Finish	Specular Clear	Semi-Specular	Matte White White Baffle	Black Baffle
Multiplier	1.00	0.91	0.92	0.84

Multipliers for relative lumen values with other color finishes.

### CCT Multipliers - 80CRI

2700K	3000K	3500K	4000K
0.93	0.95	1.00	1.05

Multipliers for relative lumen values with other series color temperatures.


### CCT Multipliers - 90CRI

2700K	3000K	3500K	4000K
0.75	0.82	0.90	0.89

Multipliers for relative lumen values with other series color temperatures.

## WALL WASH DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

WALL WASH	
Test Number	P286650
Housing	HC620D010
Module	HM612835
Reflector	61RWWC
Lumens	1798 Lm
Efficacy	89.9 Lm/W
SC	1.23

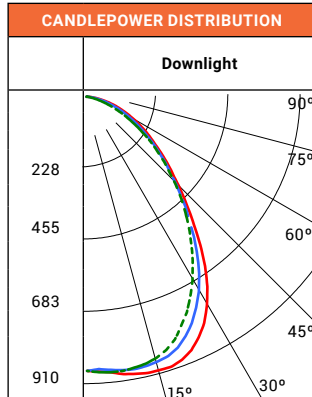

CANDELA TABLE	
Degrees Vertical	Candela
0	882
5	890
15	910
25	854
35	665
45	431
55	270
65	161
75	74
85	10
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	696	38.7
0-40	1079	60
0-60	1629	90.6
0-90	1798	100
90-180	0	0
0-180	1798	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	33399
55	25825
65	20832
75	15653
85	6416

SC = Spacing Criteria, nominal for specular clear reflector, other finishes and field results may vary.

SINGLE UNIT FOOTCANDLES								
2.5' from wall (distance from fixture along wall)								
1	16.8	12	5.4	2	0.7	0.2	0.1	
2	24.7	19.2	10.5	4.9	2.2	1	0.5	
3	22.8	18.6	11.4	6.2	3.2	1.7	0.9	
4	17.5	15	10.3	6.2	3.6	2	1.2	
5	11.9	10.7	8.2	5.5	3.4	2.1	1.3	
6	8	7.4	6.1	4.5	3.1	2	1.3	
7	5.5	5.2	4.5	3.6	2.6	1.9	1.3	
8	3.9	3.7	3.3	2.8	2.2	1.6	1.2	
9	2.8	2.7	2.5	2.2	1.8	1.4	1.1	
10	2.1	2	1.9	1.7	1.5	1.2	0.9	

MULTIPLE UNIT FOOTCANDLES								
2.5' from wall (Distance from fixture along 3')						2.5' from wall (Distance from fixture along 4')		
1	18.8	16.6	18.8	17.5	10.7	17.5		
2	29.5	29.2	29.5	26.8	20.9	26.8		
3	29	29.8	29	26	22.9	26		
4	23.7	25.3	23.7	21	20.5	21		
5	17.4	19.2	17.4	15.4	16.3	15.4		
6	12.5	13.7	12.5	11.1	12.2	11.1		
7	9.1	9.8	9.1	8.1	9	8.1		
8	6.7	7.1	6.7	6.1	6.7	6.1		
9	5	5.3	5	4.6	5	4.6		
10	3.8	4	3.8	3.5	3.8	3.5		

### Photometric Multipliers (Nominal Lumen Values)

1000 Lumen	1500 Lumen	2000 Lumen	3000 Lumen	4000 Lumen
0.52	0.72	1.00	1.44	2.02

Multipliers for relative lumen values with other series models.

### Color Finish Multipliers

Finish code	C	H	W/WB	BB
Finish	Specular Clear	Semi-Specular	Matte White White Baffle	Black Baffle
Multiplier	1.00	0.91	0.92	0.84

Multipliers for relative lumen values with other color finishes.

### CCT Multipliers - 80CRI

2700K	3000K	3500K	4000K
0.93	0.95	1.00	1.05

Multipliers for relative lumen values with other series color temperatures.

### CCT Multipliers - 90CRI


2700K	3000K	3500K	4000K
0.75	0.82	0.90	0.89

Multipliers for relative lumen values with other series color temperatures.


## Energy & Performance Data

### COLOR METRICS - TM-30-15 & CRI/CIE (3500K)

#### 80 CRI Color Metric Summary - 3500K\*

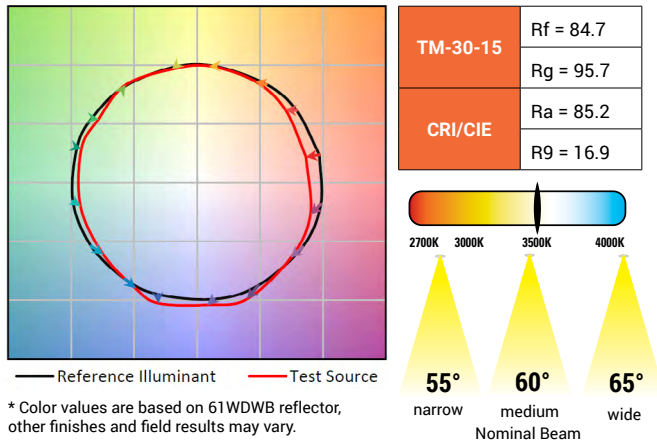

#### 90 CRI Color Metric Summary - 3500K\*

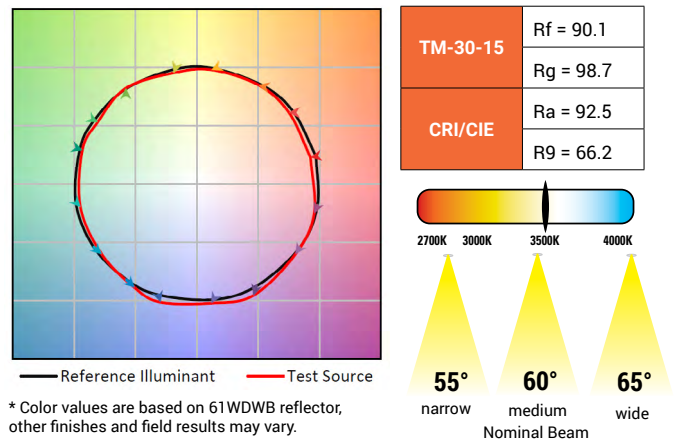

Series	1000 lumen		Series	1500 lumen		Series	2000 lumen	
Input Voltage 120-277VAC	120V	277V	Input Voltage 120-277VAC	120V	277V	Input Voltage 120-277VAC	120V	277V
Input Current (A)	0.085	0.042	Input Current (A)	0.119	0.055	Input Current (A)	0.176	0.082
Input Power (W)	10.1	10.9	Input Power (W)	14.2	14.9	Input Power (W)	21.1	21.4
In-rush Current (A)	0.644	1.95	In-rush Current (A)	0.212	0.85	In-rush Current (A)	0.588	0.624
In-rush Duration (ms)	0.125	0.24	In-rush Duration (ms)	0.28	0.32	In-rush Duration (ms)	0.3	0.38
THDi (%)	8.6	15.6	THDi (%)	7.8	16.3	THDi (%)	8.8	11.2
PF:	≥ 0.90		PF:	≥ 0.90		PF:	≥ 0.90	
(Nominal input 120-277VAC & 100% of rated output power)			(Nominal input 120-277VAC & 100% of rated output power)			(Nominal input 120-277VAC & 100% of rated output power)		
Minimum starting temperature	-30°C (-22°F)*		Minimum starting temperature	-30°C (-22°F)*		Minimum starting temperature	-30°C (-22°F)*	
Sound Rating: Class A standards			Sound Rating: Class A standards			Sound Rating: Class A standards		

Series	3000 lumen		Series	4000 lumen	
Input Voltage 120-277VAC	120V	277V	Input Voltage 120-277VAC	120V	277V
Input Current (A)	0.228	0.102	Input Current (A)	0.345	0.15
Input Power (W)	27.2	27	Input Power (W)	41.3	40.7
In-rush Current (A)	0.898	1.7	In-rush Current (A)	1.05	2.23
In-rush Duration (ms)	0.36	0.38	In-rush Duration (ms)	0.32	0.34
THDi (%)	9.7	9.3	THDi (%)	10.06	14.01
PF:	≥ 0.90		PF:	≥ 0.90	
(Nominal input 120-277VAC & 100% of rated output power)			(Nominal input 120-277VAC & 100% of rated output power)		
Minimum starting temperature	-30°C (-22°F)*		Minimum starting temperature	-30°C (-22°F)*	
Sound Rating: Class A standards			Sound Rating: Class A standards		

**Notes:**

\* Emergency Battery packs are rated for a minimum starting temperature of 0°C.

## Connected Systems


### WaveLinx Lite - WTK Tilemount Sensor




- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinx Lite Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Automatic occupancy or vacancy, sensor sensitivity, daylight dimming, etc. configurable through the app
- Refer to the WaveLinx system specifications for details



#### WaveLinx Lite WTK Tilemount Wiring Diagram

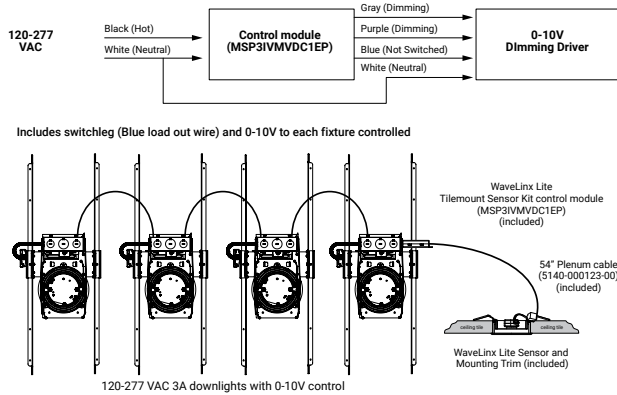

#### WaveLinx Lite Bluetooth Enabled System

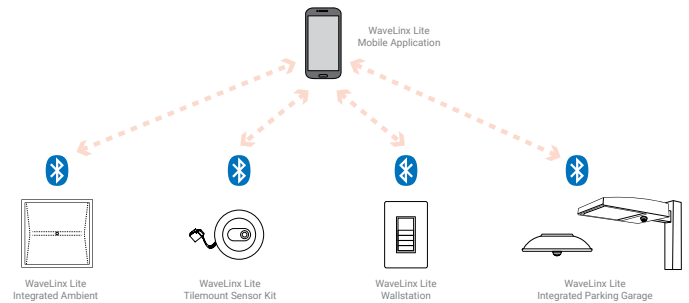


### WaveLinx Wireless – WTA Tilemount Sensor




- WaveLinx Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with Wireless Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations




#### WaveLinx mobile app settings

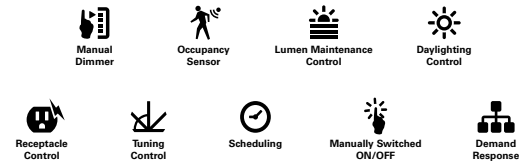

#### WaveLinx Lite WTA Tilemount Wiring Diagram

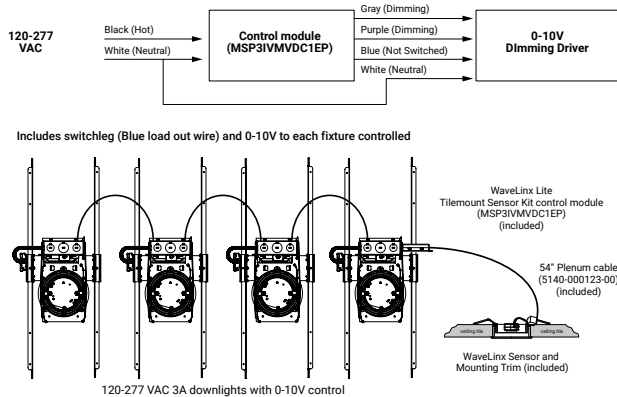


#### WaveLinx Wireless Trellix Building Management Integration

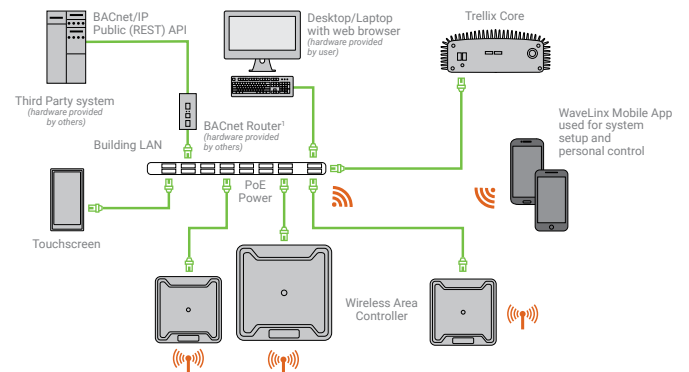


## Dimensional and Mounting Details

### NEW CONSTRUCTIONS - HIGH LUMEN 3000 AND 4000 LUMEN

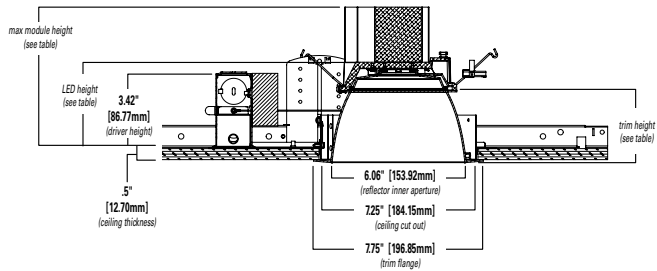

### NEW CONSTRUCTIONS - LOW LUMEN 1000, 1500, AND 2000 LUMEN

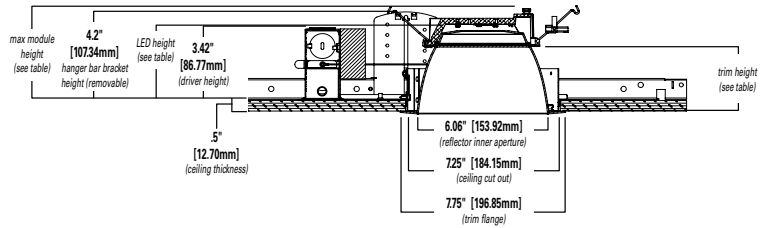

#### High Lumen (3000 & 4000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	6.6"	3.4"	3.8"
Medium	6.7"	3.5"	3.9"
Wide	6.5"	3.3"	3.7"
Baffle	6.5"	3.3"	3.7"

#### Low Lumen (1000, 1500 & 2000 Lumens)\*

Max. Module Height	Trim Height	LED Height
4.5"	3.4"	3.8"
4.6"	3.5"	3.9"
4.4"	3.3"	3.7"
4.4"	3.3"	3.7"

\*Max. height w/hanger bar bracket 4.2"

Project		Catalog #		Type	
Prepared by		Notes		Date	



# McGraw-Edison

## GLEON Galleon

Area / Site Luminaire

### Typical Applications

Outdoor • Parking Lots • Walkways • Roadways • Building Areas


### Interactive Menu

- Ordering Information [page 2](#)
- Mounting Details [page 3](#)
- Optical Distributions [page 4](#)
- Product Specifications [page 4](#)
- Energy and Performance Data [page 4](#)
- Control Options [page 9](#)

### Quick Facts

- Lumen packages range from 4,200 - 80,800 (34W - 640W)
- Efficacy up to 156 lumens per watt

### Dimensional Details

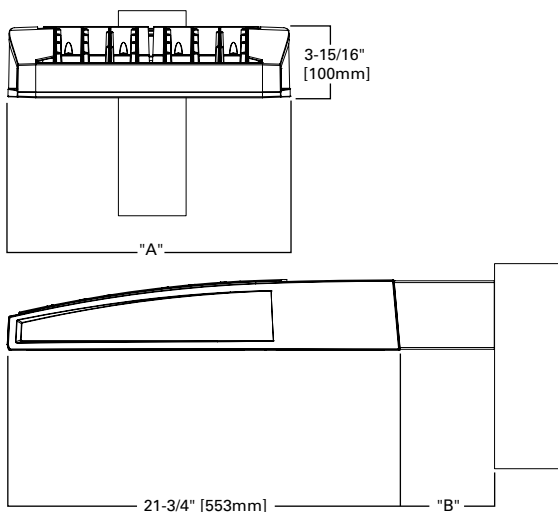

### Product Certifications



### Product Features



### Connected Systems

- WaveLinx
- Enlighted

Number of Light Squares	"A" Width	"B" Standard Arm Length	"B" Extended Arm Length <sup>1</sup>	"B" QM Arm Length	"B" QML Length	"B" QMEA Length
1-4	15-1/2"	7"	10"	10-5/8"	--	16-9/16"
5-6	21-5/8"	7"	10"	10-5/8"	--	16-9/16"
7-8	27-5/8"	7"	13"	10-5/8"	10-5/16"	--
9-10	33-3/4"	7"	16"	--	10-5/16"	--

**NOTES:**  
For arm selection requirements and additional line art, see Mounting Details section.



Ordering Information

SAMPLE NUMBER: GLEON-SA4C-740-U-T4FT-GM

Product Family <sup>1,2</sup>	Light Engine		Color Temperature	Voltage	Distribution	Mounting	Finish
	Configuration	Drive Current					
GLEON=Galleon	<b>SA1=1 Square</b> <b>SA2=2 Squares</b> <b>SA3=3 Squares</b> <b>SA4=4 Squares</b> <b>SA5=5 Squares<sup>4</sup></b> <b>SA6=6 Squares</b> <b>SA7=7 Squares<sup>3</sup></b> <b>SA8=8 Squares<sup>5</sup></b> <b>SA9=9 Squares<sup>6</sup></b> <b>SA0=10 Squares<sup>6</sup></b>	<b>A=600mA</b> <b>B=800mA</b> <b>C=1000mA</b> <b>D=1200mA<sup>16</sup></b>	<b>722=70CRI, 2200K</b> <b>727=70CRI, 2700K</b> <b>730=70CRI, 3000K</b> <b>735=70CRI, 3500K</b> <b>740=70CRI, 4000K</b> <b>750=70CRI, 5000K</b> <b>760=70CRI, 6000K</b> <b>827=80CRI, 2700K</b> <b>830=80CRI, 3000K</b> <b>AMB=Amber, 590nm<sup>14,16</sup></b>	<b>U=120-277V<sup>1</sup></b> 1=120V 2=208V 3=240V 4=277V 8=480V <sup>7,8</sup> 9=347V <sup>7</sup>	<b>T2=Type II</b> <b>T2R=Type II Roadway</b> <b>T3=Type III</b> <b>T3R=Type III Roadway</b> <b>T4FT=Type IV Forward Throw</b> <b>T4W=Type IV Wide</b> <b>5NQ=Type V Narrow</b> <b>5MQ=Type V Square Medium</b> <b>5WQ=Type V Square Wide</b> <b>SL2=Type II w/Spill Control</b> <b>SL3=Type III w/Spill Control</b> <b>SL4=Type IV w/Spill Control</b> <b>SLL=90° Spill Light Eliminator Left</b> <b>SLR=90° Spill Light Eliminator Right</b> <b>RW=Rectangular Wide Type I</b> <b>AFL=Automotive Frontline</b>	<b>[Blank]=Arm for Round or Square Pole</b> <b>EA=Extended Arm<sup>9</sup></b> <b>MA=Mast Arm Adapter<sup>10</sup></b> <b>WM=Wall Mount</b> <b>QM=Quick Mount Arm (Standard Length)<sup>11</sup></b> <b>QML=Quick Mount Arm (Standard Length, Large)<sup>35</sup></b> <b>QMEA=Quick Mount Arm (Extended Length)<sup>12</sup></b>	<b>AP=Grey</b> <b>BZ=Bronze</b> <b>BK=Black</b> <b>DP=Dark Platinum</b> <b>GM=Graphite Metallic</b> <b>WH=White</b>
Options (Add as Suffix)		Controls and Systems Options (Add as Suffix)			Accessories (Order Separately)		
<b>DIM=External 0-10V Dimming Leads<sup>19,20</sup></b> <b>F=Single Fuse (120, 277 or 347V Specify Voltage)</b> <b>FF=Double Fuse (208, 240 or 480V Specify Voltage)</b> <b>20K=Series 20kV UL 1449 Surge Protective Device</b> <b>2L=Two Circuits<sup>17,18</sup></b> <b>HA=50°C High Ambient</b> <b>HSS=Installed House Side Shield<sup>28</sup></b> <b>GRSBK=Glare Reducing Shield, Black<sup>23,30</sup></b> <b>GRSWH=Glare Reducing Shield, White<sup>23</sup></b> <b>LCF=Light Square Trim Painted to Match Housing<sup>27</sup></b> <b>MT=Installed Mesh Top</b> <b>TH=Tool-less Door Hardware</b> <b>CC=Coastal Construction finish<sup>3</sup></b> <b>L90=Optics Rotated 90° Left</b> <b>R90=Optics Rotated 90° Right</b> <b>CE=CE Marking<sup>29</sup></b> <b>AHD145=After Hours Dim, 5 Hours<sup>22</sup></b> <b>AHD245=After Hours Dim, 6 Hours<sup>22</sup></b> <b>AHD255=After Hours Dim, 7 Hours<sup>22</sup></b> <b>AHD355=After Hours Dim, 8 Hours<sup>22</sup></b> <b>DALI=DALI Drivers</b>		<b>BPC=Button Type Photocontrol</b> <b>PR=NEMA 3-PIN Photocontrol Receptacle</b> <b>PR7=NEMA 7-PIN Photocontrol Receptacle<sup>21</sup></b> <b>SPB2=Dimming Occupancy Sensor with Bluetooth Interface, 8' - 20' Mounting<sup>34</sup></b> <b>SPB4=Dimming Occupancy Sensor with Bluetooth Interface, 21' - 40' Mounting<sup>34</sup></b> <b>MS-L20=Motion Sensor for ON/OFF Operation, 9' - 20' Mounting Height<sup>24</sup></b> <b>MS-L40W=Motion Sensor for ON/OFF Operation, 21' - 40' Mounting Height<sup>24</sup></b> <b>MS/X-L20=Bi-Level Motion Sensor, 9' - 20' Mounting Height<sup>24,25</sup></b> <b>MS/X-L40W=Bi-Level Motion Sensor, 21' - 40' Mounting Height<sup>24,25</sup></b> <b>MS/DIM-L20=Motion Sensor for Dimming Operation, 9' - 20' Mounting Height<sup>24</sup></b> <b>MS/DIM-L40W=Motion Sensor for Dimming Operation, 21' - 40' Mounting Height<sup>24</sup></b> <b>ZW=WaveLinX Module and 4-PIN Receptacle</b> <b>ZD=WaveLinX Module with DALI driver and 4-PIN Receptacle</b> <b>SWPD4XX=WaveLinX Sensor Only, 7'-15'<sup>13,32,33</sup></b> <b>SWPD5XX=WaveLinX Sensor Only, 15'-40'<sup>13,32,33</sup></b> <b>WOBXX=WaveLinX Sensor with Bluetooth, 7'-15'<sup>13,32</sup></b> <b>WOFXX=WaveLinX Sensor with Bluetooth, 15'-40'<sup>13,32</sup></b> <b>LWR-LW=Enlightened Sensor, 8'-16' Mounting Height<sup>26</sup></b> <b>LWR-LN=Enlightened Sensor, 16'-40' Mounting Height<sup>26</sup></b> <b>DIM10-MS/DIM-L08=Synapse Occupancy Sensor (&lt;8' Mounting)<sup>19</sup></b> <b>DIM10-MS/DIM-L20=Synapse Occupancy Sensor (9'-20' Mounting)<sup>19</sup></b> <b>DIM10-MS/DIM-L40=Synapse Occupancy Sensor (21'-40' Mounting)<sup>19</sup></b>			<b>OA/RA1016=NEMA Photocontrol Multi-Tap - 105-285V</b> <b>OA/RA1027=NEMA Photocontrol - 480V</b> <b>OA/RA1201=NEMA Photocontrol - 347V</b> <b>OA/RA1013=Photocontrol Shorting Cap</b> <b>OA/RA1014=120V Photocontrol</b> <b>MA1252=10kV Surge Module Replacement</b> <b>MA1036-XX=Single Tenon Adapter for 2-3/8" O.D. Tenon</b> <b>MA1037-XX=2@180° Tenon Adapter for 2-3/8" O.D. Tenon</b> <b>MA1197-XX=3@120° Tenon Adapter for 2-3/8" O.D. Tenon</b> <b>MA1188-XX=4@90° Tenon Adapter for 2-3/8" O.D. Tenon</b> <b>MA1189-XX=2@90° Tenon Adapter for 2-3/8" O.D. Tenon</b> <b>MA1190-XX=3@90° Tenon Adapter for 2-3/8" O.D. Tenon</b> <b>MA1191-XX=2@120° Tenon Adapter for 2-3/8" O.D. Tenon</b> <b>MA1038-XX=Single Tenon Adapter for 3-1/2" O.D. Tenon</b> <b>MA1039-XX=2@180° Tenon Adapter for 3-1/2" O.D. Tenon</b> <b>MA1192-XX=3@120° Tenon Adapter for 3-1/2" O.D. Tenon</b> <b>MA1193-XX=4@90° Tenon Adapter for 3-1/2" O.D. Tenon</b> <b>MA1194-XX=2@90° Tenon Adapter for 3-1/2" O.D. Tenon</b> <b>MA1195-XX=3@90° Tenon Adapter for 3-1/2" O.D. Tenon</b> <b>FSIR-100=Wireless Configuration Tool for Occupancy Sensor<sup>24</sup></b> <b>GLEON-MT1=Field Installed Mesh Top for 1-4 Light Squares</b> <b>GLEON-MT2=Field Installed Mesh Top for 5-6 Light Squares</b> <b>GLEON-MT3=Field Installed Mesh Top for 7-8 Light Squares</b> <b>GLEON-MT4=Field Installed Mesh Top for 9-10 Light Squares</b> <b>GLEON-QM=Quick Mount Arm Kit<sup>11</sup></b> <b>GLEON-QMEA=Quick Mount Extended Arm Kit<sup>12</sup></b> <b>LS/HSS=Field Installed House Side Shield<sup>28,30</sup></b> <b>LS/GRSBK=Glare Reducing Shield, Black<sup>23,30</sup></b> <b>LS/GRSWH=Glare Reducing Shield, White<sup>23,30</sup></b> <b>LS/PFS=Perimeter Shield, Black<sup>15</sup></b> <b>WOLC-7P-10A=WaveLinX Outdoor Control Module<sup>19,31</sup></b> <b>SWPD4-XX=WaveLinX Wireless Sensor, 7'-15' Mounting Height<sup>13,19,32,33</sup></b> <b>SWPD5-XX=WaveLinX Wireless Sensor, 15'-40' Mounting Height<sup>13,19,32,33</sup></b>		


PA3 & PA3HS  
PA4 & PA4HS

PA3HS & PA4HS

**NOTES:**


- Customer is responsible for engineering analysis to confirm pole and fixture compatibility for all applications. Refer to our white paper WPS13001EN for additional support information.
- DesignLights Consortium® Qualified. Refer to www.designlights.org Qualified Products List under Family Models for details.
- Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. Not available with TH option.
- Not compatible with MS/4-LXX or MS/1-LXX sensors.
- Not compatible with extended quick mount arm (QMEA).
- Not compatible with standard quick mount arm (QM) or extended quick mount arm (QMEA).
- Requires the use of an internal step down transformer when combined with sensor options. Not available with sensor at 1200mA. Not available in combination with the HA high ambient and sensor options at 1A.
- 480V must utilize Wye system only. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems.)
- May be required when two or more luminaires are oriented on a 90° or 120° drilling pattern. Refer to arm mounting requirement table.
- Factory installed.
- Maximum 8 light squares.
- Maximum 6 light squares.
- Requires ZW or ZD receptacle.
- Narrow-band 590nm +/- 5nm for wildlife and observatory use. Choose drive current A; supplied at 500mA drive current only. Available with 5WQ, 5MQ, SL2, SL3 and SL4 distributions. Can be used with HSS option.
- Set of 4 pcs. One set required per Light Square.
- Not available with HA option.
- 2L is not available with MS, MS/X or MS/DIM at 347V or 480V. 2L in SA2 through SA4 requires a larger housing, normally used for SA5 or SA6. Extended arm option may be required when mounting two or more fixtures per pole at 90° or 120°. Refer to arm mounting requirement table.
- Not available with Enlightened wireless sensors.
- Cannot be used with other control options.
- Low voltage control lead brought out 18" outside fixture.
- Not available if any "MS" sensor is selected. Motion sensor has an integral photocell.
- Requires the use of BPC photocontrol or the PR7 or PR photocontrol receptacle with photocontrol accessory. See After Hours Dim supplemental guide for additional information.
- Not for use with T4FT, T4W or SL4 optics. See IES files for details.
- The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Cooper Lighting Solutions for more information.
- Replace X with number of Light Squares operating in low output mode.
- Enlightened wireless sensors are factory installed only requiring network components LWP-EM-1, LWP-GW-1 and LWP-PoE8 in appropriate quantities.
- Not available with house side shield (HSS).
- Not for use with 5NQ, 5MQ, 5WQ or RW optics. A black trim plate is used when HSS is selected.
- CE is not available with the LWR, MS, MS/X, MS/DIM, BPC, PR or PR7 options. Available in 120-277V only.
- One required for each Light Square.
- Requires PR7.
- Replace XX with sensor color (WH, BZ or BK.)
- WAC Gateway required to enable field-configurability. Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed.
- Smart device with mobile application required to change system defaults. See controls section for details.
- Available for 7-10 squares.

LumenSafe Integrated Network Security Camera Technology Options (Add as Suffix)


Product Family	Camera Type	Data Backhaul
L=LumenSafe Technology 	<b>D=Standard Dome Camera</b> <b>H=Hi-Res Dome Camera</b> <b>Z=Remote PTZ Camera</b>	<b>C=Cellular, No SIM</b> <b>A=Cellular, AT&amp;T</b> <b>V=Cellular, Verizon</b> <b>S=Cellular, Sprint</b>  <b>R=Cellular, Rogers</b> <b>W=Wi-Fi Networking w/ Omni-Directional Antenna</b> <b>E=Ethernet Networking</b>

Mounting Details


Standard Arm (Drilling Pattern)




Quick Mount Arm  
(Includes fixture adapter)




QM and QMEA Pole Mount

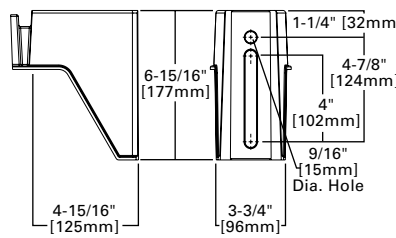


QML Pole Mount

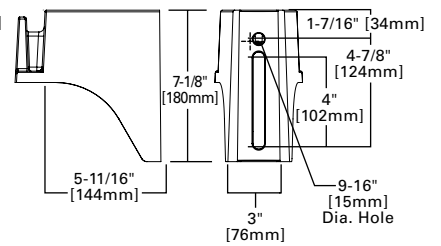


QM Quick Mount Arm (Standard)

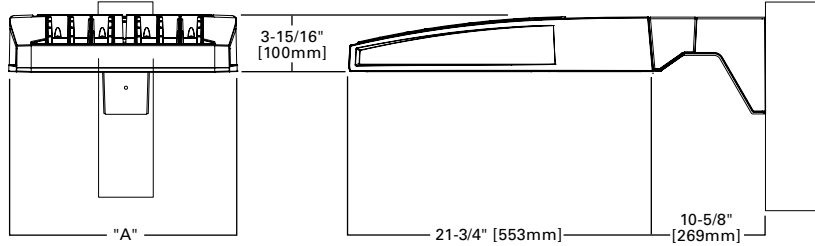


QMEA Quick Mount Arm (Extended)

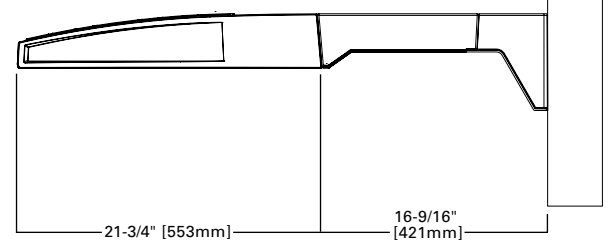

Standard Wall Mount




Mast Arm Mount

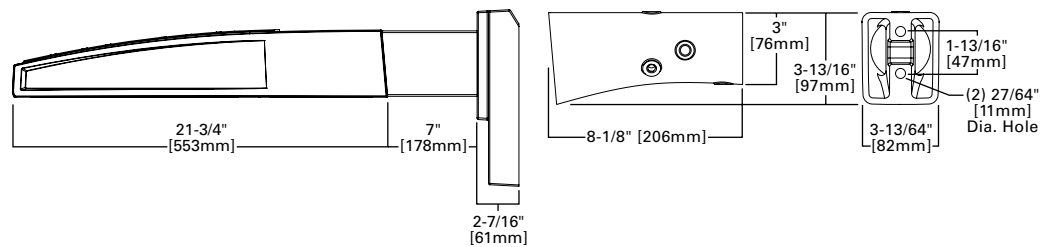

Arm Mounting Requirements

Number of Light Squares	Standard Arm @ 90° Apart	Standard Arm @ 120° Apart	Quick Mount Arm @ 90° Apart	Quick Mount Arm @ 120° Apart
1	Standard	Standard	QM Extended	Quick Mount
2	Standard	Standard	QM Extended	Quick Mount
3	Standard	Standard	QM Extended	Quick Mount
4	Standard	Standard	QM Extended	Quick Mount
5	Extended	Standard	QM Extended	Quick Mount
6	Extended	Standard	QM Extended	Quick Mount
7	Extended	Extended	--	Quick Mount
8	Extended	Extended	--	Quick Mount
9	Extended	Extended	--	--
10	Extended	Extended	--	--

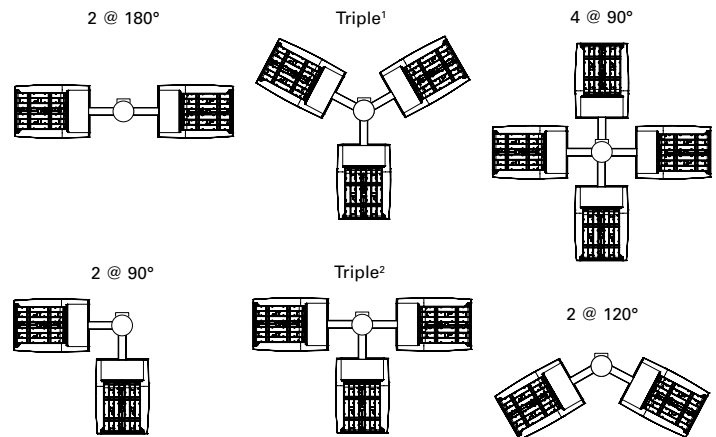


NOTES: 1 Round poles are 3 @ 120°. Square poles are 3 @ 90°. 2 Round poles are 3 @ 90°. 3 Shown with 4 square configurations

Fixture Weights and EPAs

Number of Light Squares	Weight with Standard and Extended Arm (lbs.)	EPA with Standard and Extended Arm (Sq. Ft.)	Weight with QM Arm (lbs.)	EPA with QM Arm (Sq. Ft.)	Weight with QML (lbs.)	EPA with QML (Sq. Ft.)	Weight with QMEA (lbs.)	EPA with QMEA (Sq. Ft.)
1-4	33	0.96	35	1.11	--	--	38	1.11
5-6	44	1.00	46	1.11	--	--	49	1.11
7-8	54	1.07	56	1.11	58	1.11	--	--
9-10	63	1.12	--	--	67	1.11	--	--

Optical Distributions

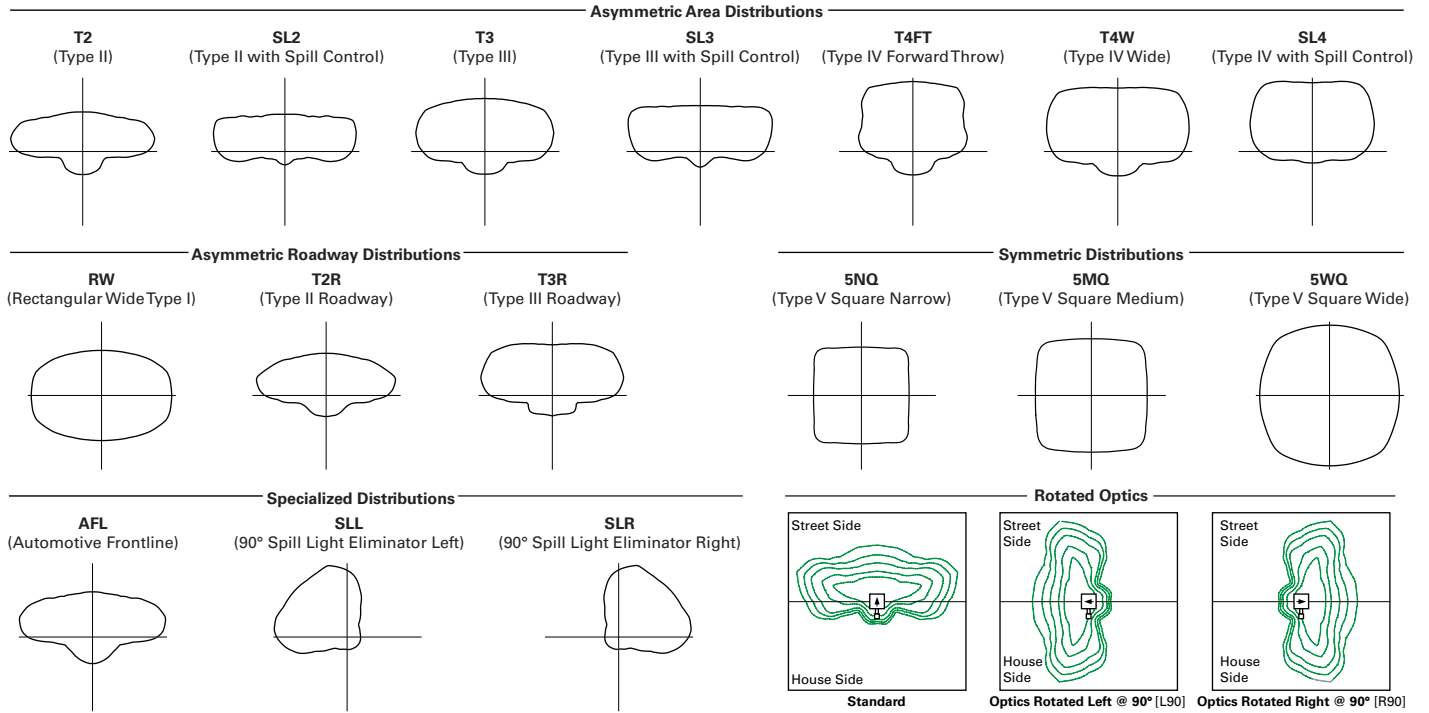

Product Specifications

Construction

- Extruded aluminum driver enclosure
- Heavy-wall, die-cast aluminum end caps
- Die-cast aluminum heat sinks
- Patent pending interlocking housing and heat sink

Optics

- Patented, high-efficiency injection-molded AccuLED Optics technology
- 16 optical distributions
- 3 shielding options including HSS, GRS and PFS
- IDA Certified (3000K CCT and warmer only)

Electrical

- LED drivers are mounted to removable tray

assembly for ease of maintenance

- Standard with 0-10V dimming
- Standard with Cooper Lighting Solutions proprietary circuit module designed to withstand 10kV of transient line surge
- Suitable for operation in -40°C to 40°C ambient environments. Optional 50°C high ambient (HA) configuration.

Mounting

- Standard extruded arm includes internal bolt guides and round pole adapter
- Extended arms (EA and QMEA) may be required in 90° or 120° pole mount configurations, see arm mounting requirements table

- Mast arm (MA) factory installed
- Wall mount (WM) option available
- Quick mount arm (QM and QMEA) includes pole adapter and factory installed fixture mount for fast installation to square or round poles

Finish

- Super housing durable TGIC polyester powder coat paint, 2.5 mil nominal thickness
- Heat sink is powder coated black
- RAL and custom color matches available
- Coastal Construction (CC) option available

Warranty

- Five year warranty

Energy and Performance Data

Lumen Maintenance (TM-21)

Drive Current	Ambient Temperature	25,000 hours*	50,000 hours*	60,000 hours*	100,000 hours**	Theoretical L70 hours**
Up to 1A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.7%	98.3%	98.1%	97.4%	> 1.9M
	50°C	98.2%	97.2%	96.8%	95.2%	> 851,000
1.2A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.5%	97.9%	97.7%	96.7%	> 1.3M

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
0°C	1.02
10°C	1.01
25°C	1.00
40°C	0.99
50°C	0.97

\* Supported by IES TM-21 standards

\*\* Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, explaining proper use of IES TM-21 and LM-80.

[View GLEON IES files](#)

Nominal Power Lumens (1.2A)

 Supplemental Performance Guide\*\*

Number of Light Squares	1	2	3	4	5	6	7	8	9	10	
<b>Nominal Power (Watts)</b>	67	129	191	258	320	382	448	511	575	640	
<b>Input Current @ 120V (A)</b>	0.58	1.16	1.78	2.31	2.94	3.56	4.09	4.71	5.34	5.87	
<b>Input Current @ 208V (A)</b>	0.33	0.63	0.93	1.27	1.57	1.87	2.22	2.52	2.8	3.14	
<b>Input Current @ 240V (A)</b>	0.29	0.55	0.80	1.10	1.35	1.61	1.93	2.18	2.41	2.71	
<b>Input Current @ 277V (A)</b>	0.25	0.48	0.70	0.96	1.18	1.39	1.69	1.90	2.09	2.36	
<b>Input Current @ 347V (A)</b>	0.20	0.39	0.57	0.78	0.96	1.15	1.36	1.54	1.72	1.92	
<b>Input Current @ 480V (A)</b>	0.15	0.30	0.43	0.60	0.73	0.85	1.03	1.16	1.28	1.45	
<b>Optics</b>											
<b>T2</b>	4000K Lumens	7,972	15,580	23,245	30,714	38,056	45,541	53,857	61,024	68,072	75,366
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	119	121	122	119	119	119	120	119	118	118
<b>T2R</b>	4000K Lumens	8,462	16,539	24,680	32,609	40,401	48,348	57,176	64,783	72,266	80,010
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	129	126	126	127	128	127	126	125
<b>T3</b>	4000K Lumens	8,125	15,879	23,693	31,307	38,787	46,417	54,893	62,197	69,381	76,818
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	121	123	124	121	121	122	123	122	121	120
<b>T3R</b>	4000K Lumens	8,306	16,232	24,220	32,001	39,651	47,447	56,114	63,580	70,924	78,523
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	124	126	127	124	124	124	125	124	123	123
<b>T4FT</b>	4000K Lumens	8,173	15,970	23,831	31,488	39,014	46,686	55,212	62,558	69,783	77,261
	BUG Rating	B1-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	122	124	125	122	122	122	123	122	121	121
<b>T4W</b>	4000K Lumens	8,067	15,764	23,522	31,080	38,510	46,082	54,499	61,751	68,881	76,263
	BUG Rating	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B5-U0-G5
	Lumens per Watt	120	122	123	120	120	121	122	121	120	119
<b>SL2</b>	4000K Lumens	7,958	15,552	23,206	30,662	37,989	45,462	53,763	60,920	67,952	75,235
	BUG Rating	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	119	121	121	119	119	119	120	119	118	118
<b>SL3</b>	4000K Lumens	8,124	15,877	23,690	31,302	38,784	46,410	54,885	62,189	69,372	76,805
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	121	123	124	121	121	121	123	122	121	120
<b>SL4</b>	4000K Lumens	7,719	15,085	22,510	29,741	36,850	44,097	52,148	59,089	65,913	72,977
	BUG Rating	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	115	117	118	115	115	115	116	116	115	114
<b>5NQ</b>	4000K Lumens	8,380	16,375	24,436	32,287	40,003	47,870	56,610	64,144	71,552	79,221
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	125	127	128	125	125	125	126	126	124	124
<b>5MQ</b>	4000K Lumens	8,534	16,676	24,885	32,881	40,739	48,752	57,653	65,326	72,868	80,679
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	127	129	130	127	127	128	129	128	127	126
<b>5WQ</b>	4000K Lumens	8,556	16,723	24,951	32,968	40,847	48,881	57,808	65,499	73,063	80,894
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	128	130	131	128	128	128	129	128	127	126
<b>SLL/SLR</b>	4000K Lumens	7,140	13,951	20,817	27,506	34,081	40,783	48,231	54,649	60,959	67,492
	BUG Rating	B1-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	107	108	109	107	107	107	108	107	106	105
<b>RW</b>	4000K Lumens	8,304	16,228	24,215	31,994	39,641	47,437	56,100	63,566	70,907	78,504
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	124	126	127	124	124	124	125	124	123	123
<b>AFL</b>	4000K Lumens	8,335	16,287	24,302	32,110	39,784	47,610	56,303	63,796	71,163	78,790
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G5
	Lumens per Watt	124	126	127	124	124	125	126	125	124	123

\* Nominal data for 70 CRI. \*\* For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (1A)

 Supplemental Performance Guide\*\*

Number of Light Squares		1	2	3	4	5	6	7	8	9	10
<b>Nominal Power (Watts)</b>		59	113	166	225	279	333	391	445	501	558
<b>Input Current @ 120V (A)</b>		0.51	1.02	1.53	2.03	2.55	3.06	3.56	4.08	4.60	5.07
<b>Input Current @ 208V (A)</b>		0.29	0.56	0.82	1.11	1.37	1.64	1.93	2.19	2.46	2.75
<b>Input Current @ 240V (A)</b>		0.26	0.48	0.71	0.96	1.19	0.41	1.67	1.89	2.12	2.39
<b>Input Current @ 277V (A)</b>		0.23	0.42	0.61	0.83	1.03	1.23	1.45	1.65	1.84	2.09
<b>Input Current @ 347V (A)</b>		0.17	0.32	0.50	0.64	0.82	1.00	1.14	1.32	1.50	1.68
<b>Input Current @ 480V (A)</b>		0.14	0.24	0.37	0.48	0.61	0.75	0.91	0.99	1.12	1.28
<b>Optics</b>											
<b>T2</b>	4000K Lumens	7,267	14,201	21,190	28,000	34,692	41,515	49,096	55,627	62,053	68,703
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	123	126	128	124	124	125	126	125	124	123
<b>T2R</b>	4000K Lumens	7,715	15,077	22,497	29,725	36,829	44,073	52,122	59,056	65,876	72,937
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	131	133	136	132	132	132	133	133	131	131
<b>T3</b>	4000K Lumens	7,408	14,475	21,598	28,539	35,358	42,313	50,039	56,698	63,246	70,024
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	130	127	127	127	128	127	126	125
<b>T3R</b>	4000K Lumens	7,571	14,798	22,078	29,172	36,145	43,253	51,153	57,959	64,653	71,581
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	128	131	133	130	130	130	131	130	129	128
<b>T4FT</b>	4000K Lumens	7,451	14,559	21,725	28,703	35,564	42,558	50,330	57,027	63,613	70,430
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	129	131	128	127	128	129	128	127	126
<b>T4W</b>	4000K Lumens	7,354	14,371	21,442	28,333	35,105	42,007	49,681	56,291	62,792	69,521
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	125	127	129	126	126	126	127	126	125	125
<b>SL2</b>	4000K Lumens	7,254	14,178	21,155	27,951	34,631	41,443	49,011	55,533	61,944	68,584
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	123	125	127	124	124	124	125	125	124	123
<b>SL3</b>	4000K Lumens	7,406	14,474	21,596	28,534	35,355	42,307	50,033	56,690	63,237	70,014
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	126	128	130	127	127	127	128	127	126	125
<b>SL4</b>	4000K Lumens	7,037	13,751	20,519	27,112	33,592	40,198	47,538	53,864	60,087	66,524
	BUG Rating	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	119	122	124	120	120	121	122	121	120	119
<b>5NQ</b>	4000K Lumens	7,640	14,928	22,275	29,431	36,465	43,637	51,606	58,472	65,226	72,218
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	129	132	134	131	131	131	132	131	130	129
<b>5MQ</b>	4000K Lumens	7,779	15,203	22,684	29,973	37,137	44,441	52,555	59,549	66,427	73,545
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	132	135	137	133	133	133	134	134	133	132
<b>5WQ</b>	4000K Lumens	7,800	15,243	22,744	30,052	37,236	44,560	52,697	59,708	66,603	73,742
	BUG Rating	B3-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	132	135	137	134	133	134	135	134	133	132
<b>SLL/SLR</b>	4000K Lumens	6,510	12,719	18,977	25,075	31,067	37,176	43,967	49,817	55,569	61,525
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	110	113	114	111	111	112	112	112	111	110
<b>RW</b>	4000K Lumens	7,570	14,793	22,073	29,165	36,137	43,243	51,140	57,945	64,637	71,564
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5
	Lumens per Watt	128	131	133	130	130	130	131	130	129	128
<b>AFL</b>	4000K Lumens	7,598	14,847	22,154	29,272	36,267	43,400	51,326	58,156	64,872	71,824
	BUG Rating	B1-U0-G1	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4	B4-U0-G4	B4-U0-G4
	Lumens per Watt	129	131	133	130	130	130	131	131	129	129

\* Nominal data for 70 CRI. \*\* For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (800mA)

 Supplemental Performance Guide\*\*

Number of Light Squares	1	2	3	4	5	6	7	8	9	10	
<b>Nominal Power (Watts)</b>	44	85	124	171	210	249	295	334	374	419	
<b>Input Current @ 120V (A)</b>	0.39	0.77	1.13	1.54	1.90	2.26	2.67	3.03	3.39	3.80	
<b>Input Current @ 208V (A)</b>	0.22	0.44	0.62	0.88	1.06	1.24	1.50	1.68	1.87	2.12	
<b>Input Current @ 240V (A)</b>	0.19	0.38	0.54	0.76	0.92	1.08	1.30	1.46	1.62	1.84	
<b>Input Current @ 277V (A)</b>	0.17	0.36	0.47	0.72	0.83	0.95	1.19	1.31	1.42	1.67	
<b>Input Current @ 347V (A)</b>	0.15	0.24	0.38	0.49	0.63	0.77	0.87	1.01	1.15	1.52	
<b>Input Current @ 480V (A)</b>	0.11	0.18	0.29	0.37	0.48	0.59	0.66	0.77	0.88	0.96	
<b>Optics</b>											
<b>T2</b>	4000K Lumens	5,871	11,474	17,121	22,622	28,029	33,542	39,667	44,944	50,134	55,508
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	133	135	138	132	133	135	134	135	134	132
<b>T2R</b>	4000K Lumens	6,233	12,181	18,176	24,016	29,756	35,608	42,111	47,714	53,224	58,929
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5
	Lumens per Watt	142	143	147	140	142	143	143	143	142	141
<b>T3</b>	4000K Lumens	5,986	11,695	17,450	23,057	28,568	34,186	40,430	45,809	51,099	56,576
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	136	138	141	135	136	137	137	137	137	135
<b>T3R</b>	4000K Lumens	6,117	11,955	17,838	23,569	29,203	34,946	41,328	46,827	52,235	57,832
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	139	141	144	138	139	140	140	140	140	138
<b>T4FT</b>	4000K Lumens	6,019	11,763	17,551	23,190	28,734	34,384	40,663	46,074	51,396	56,904
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	137	138	142	136	137	138	138	138	137	136
<b>T4W</b>	4000K Lumens	5,942	11,610	17,324	22,891	28,363	33,940	40,138	45,480	50,732	56,169
	BUG Rating	B1-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	135	137	140	134	135	136	136	136	136	134
<b>SL2</b>	4000K Lumens	5,862	11,454	17,091	22,583	27,980	33,484	39,598	44,867	50,048	55,411
	BUG Rating	B1-U0-G2	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	133	135	138	132	133	134	134	134	134	132
<b>SL3</b>	4000K Lumens	5,985	11,694	17,447	23,053	28,565	34,182	40,424	45,804	51,092	56,568
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	136	138	141	135	136	137	137	137	137	135
<b>SL4</b>	4000K Lumens	5,685	11,111	16,577	21,905	27,140	32,478	38,409	43,520	48,546	53,748
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	129	131	134	128	129	130	130	130	130	128
<b>5NQ</b>	4000K Lumens	6,172	12,061	17,997	23,778	29,462	35,256	41,694	47,242	52,699	58,347
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	140	142	145	139	140	142	141	141	141	139
<b>5MQ</b>	4000K Lumens	6,285	12,283	18,328	24,217	30,004	35,907	42,462	48,112	53,669	59,421
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	143	145	148	142	143	144	144	144	144	142
<b>5WQ</b>	4000K Lumens	6,303	12,317	18,377	24,281	30,085	36,001	42,575	48,241	53,812	59,579
	BUG Rating	B3-U0-G1	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5	B5-U0-G5	B5-U0-G5
	Lumens per Watt	143	145	148	142	143	145	144	144	144	142
<b>SLL/SLR</b>	4000K Lumens	5,260	10,276	15,332	20,259	25,101	30,037	35,522	40,249	44,898	49,708
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	120	121	124	118	120	121	120	121	120	119
<b>RW</b>	4000K Lumens	6,116	11,952	17,834	23,563	29,196	34,938	41,317	46,817	52,224	57,819
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	139	141	144	138	139	140	140	140	140	138
<b>AFL</b>	4000K Lumens	6,139	11,996	17,899	23,650	29,302	35,064	41,468	46,987	52,412	58,030
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B4-U0-G4	B4-U0-G4
	Lumens per Watt	140	141	144	138	140	141	141	141	140	138

\* Nominal data for 70 CRI. \*\* For additional performance data, please reference the Galleon Supplemental Performance Guide.

Nominal Power Lumens (600mA)

 Supplemental Performance Guide\*\*

Number of Light Squares	1	2	3	4	5	6	7	8	9	10	
<b>Nominal Power (Watts)</b>	34	66	96	129	162	193	226	257	290	323	
<b>Input Current @ 120V (A)</b>	0.30	0.58	0.86	1.16	1.44	1.73	2.03	2.33	2.59	2.89	
<b>Input Current @ 208V (A)</b>	0.17	0.34	0.49	0.65	0.84	0.99	1.14	1.30	1.48	1.63	
<b>Input Current @ 240V (A)</b>	0.15	0.30	0.43	0.56	0.74	0.87	1.00	1.13	1.30	1.43	
<b>Input Current @ 277V (A)</b>	0.14	0.28	0.41	0.52	0.69	0.81	0.93	1.04	1.22	1.33	
<b>Input Current @ 347V (A)</b>	0.11	0.19	0.30	0.39	0.49	0.60	0.69	0.77	0.90	0.99	
<b>Input Current @ 480V (A)</b>	0.08	0.15	0.24	0.30	0.38	0.48	0.53	0.59	0.71	0.77	
<b>Optics</b>											
<b>T2</b>	4000K Lumens	4,787	9,357	13,961	18,448	22,856	27,353	32,347	36,651	40,884	45,265
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	141	142	145	143	141	142	143	143	141	140
<b>T2R</b>	4000K Lumens	5,083	9,934	14,822	19,585	24,266	29,038	34,341	38,911	43,404	48,055
	BUG Rating	B1-U0-G1	B1-U0-G2	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5
	Lumens per Watt	150	151	154	152	150	150	152	151	150	149
<b>T3</b>	4000K Lumens	4,880	9,537	14,231	18,803	23,296	27,878	32,970	37,358	41,671	46,137
	BUG Rating	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	144	145	148	146	144	144	146	145	144	143
<b>T3R</b>	4000K Lumens	4,988	9,749	14,547	19,220	23,814	28,497	33,703	38,188	42,598	47,162
	BUG Rating	B1-U0-G2	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	147	148	152	149	147	148	149	149	147	146
<b>T4FT</b>	4000K Lumens	4,909	9,591	14,312	18,911	23,432	28,040	33,161	37,574	41,913	46,404
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5
	Lumens per Watt	144	145	149	147	145	145	147	146	145	144
<b>T4W</b>	4000K Lumens	4,845	9,468	14,128	18,668	23,130	27,678	32,732	37,088	41,371	45,805
	BUG Rating	B1-U0-G2	B2-U0-G2	B2-U0-G3	B3-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	143	143	147	145	143	143	145	144	143	142
<b>SL2</b>	4000K Lumens	4,779	9,341	13,937	18,416	22,818	27,305	32,292	36,589	40,813	45,188
	BUG Rating	B1-U0-G2	B2-U0-G3	B2-U0-G3	B3-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B4-U0-G5	B4-U0-G5
	Lumens per Watt	141	142	145	143	141	141	143	142	141	140
<b>SL3</b>	4000K Lumens	4,879	9,536	14,229	18,800	23,294	27,874	32,965	37,351	41,666	46,130
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	144	144	148	146	144	144	146	145	144	143
<b>SL4</b>	4000K Lumens	4,637	9,059	13,519	17,863	22,132	26,486	31,322	35,490	39,589	43,831
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G4	B2-U0-G4	B2-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	136	137	141	138	137	137	139	138	137	136
<b>5NQ</b>	4000K Lumens	5,033	9,835	14,676	19,392	24,026	28,751	34,002	38,526	42,975	47,581
	BUG Rating	B2-U0-G1	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3
	Lumens per Watt	148	149	153	150	148	149	150	150	148	147
<b>5MQ</b>	4000K Lumens	5,126	10,015	14,946	19,747	24,468	29,281	34,628	39,236	43,766	48,457
	BUG Rating	B3-U0-G1	B3-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G4
	Lumens per Watt	151	152	156	153	151	152	153	153	151	150
<b>5WQ</b>	4000K Lumens	5,139	10,043	14,985	19,801	24,533	29,359	34,721	39,339	43,883	48,586
	BUG Rating	B3-U0-G1	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4	B5-U0-G4	B5-U0-G5	B5-U0-G5
	Lumens per Watt	151	152	156	153	151	152	154	153	151	150
<b>SLL/SLR</b>	4000K Lumens	4,289	8,380	12,502	16,520	20,469	24,494	28,967	32,823	36,613	40,537
	BUG Rating	B1-U0-G2	B1-U0-G3	B2-U0-G3	B2-U0-G4	B3-U0-G4	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5	B3-U0-G5
	Lumens per Watt	126	127	130	128	126	127	128	128	126	126
<b>RW</b>	4000K Lumens	4,987	9,746	14,543	19,215	23,808	28,491	33,695	38,178	42,587	47,151
	BUG Rating	B2-U0-G1	B3-U0-G1	B4-U0-G2	B4-U0-G2	B4-U0-G2	B5-U0-G3	B5-U0-G3	B5-U0-G3	B5-U0-G4	B5-U0-G4
	Lumens per Watt	147	148	151	149	147	148	149	149	147	146
<b>AFL</b>	4000K Lumens	5,007	9,782	14,597	19,285	23,896	28,594	33,817	38,317	42,742	47,322
	BUG Rating	B1-U0-G1	B1-U0-G1	B2-U0-G2	B2-U0-G2	B3-U0-G2	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3	B3-U0-G3
	Lumens per Watt	147	148	152	149	148	148	150	149	147	147

\* Nominal data for 70 CRI. \*\* For additional performance data, please reference the Galleon Supplemental Performance Guide.

## Control Options

### 0-10V (DIM)

This fixture is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

### Photocontrol (BPC, PR and PR7)




Optional button-type photocontrol (BPC) and photocontrol receptacles (PR and PR7) provide a flexible solution to enable “dusk-to-dawn” lighting by sensing light levels. Advanced control systems compatible with NEMA 7-pin standards can be utilized with the PR7 receptacle.

### After Hours Dim (AHD)

This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a “dusk-to-dawn” period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.



### Dimming Occupancy Sensor (SPB, MS/DIM-LXX, MS/X-LXX and MS-LXX)

These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. The MS-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity. The MS/X-LXX is also preset for five minutes and only controls the specified number of light engines to maintain steady output from the remaining light engines. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

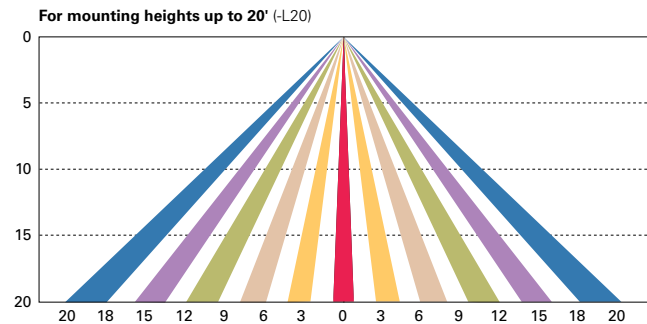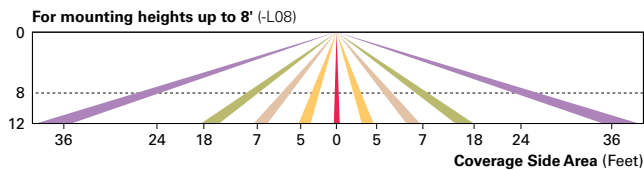

### Enlighted Wireless Control and Monitoring System (LWR-LW and LWR-LN)

Enlighted is a connected lighting solution that combines a broad selection of energy-efficient LED luminaires with a powerful integrated wireless sensor system. The sensor controls the lighting system in compliance with the latest energy codes and collects valuable data about building performance and use. Software applications turn the granular data into information through energy dashboards and specialized apps that make it simple and help optimize the use of building resources, beyond lighting.

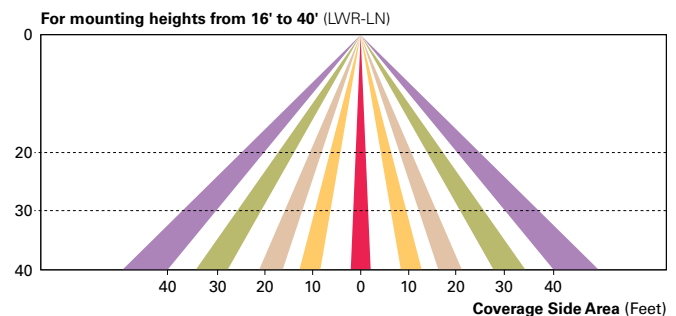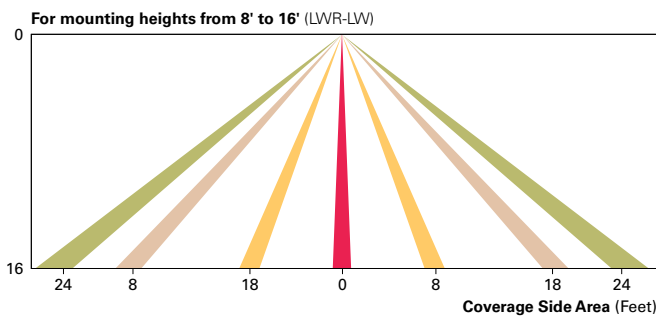

### WaveLinX Wireless Outdoor Lighting Control Module (WOLC-7P-10A)

The 7-pin wireless outdoor lighting control module enables WaveLinX to control outdoor area, site and flood lighting. WaveLinX controls outdoor lighting using schedules to provide ON, OFF and dimming controls based on astronomic or time schedules based on a 7 day week.

### LumenSafe Integrated Network Security Camera (LD)

Cooper Lighting Solutions brings ease of camera deployment to a whole new level. No additional wiring is needed beyond providing line power to the luminaire. A variety of networking options allows security integrators to design the optimal solution for active surveillance. As the ideal solution to meet the needs for active surveillance, the LumenSafe integrated network camera is a streamlined, outdoor-ready fixed dome that provides HDTV 1080p video. This IP camera is optimally designed for deployment in the video management system or security software platform of choice.

### Synapse (DIM10)

SimplySNAP integrated wireless controls system by Synapse. Includes factory installed DIM10 Synapse control module and MS/DC motion sensor; requires additional Synapse system components for operation. Contact Synapse at [www.synapsewireless.com](http://www.synapsewireless.com) for product support, warranty and terms and conditions.



# THE EDGE® Series

LED Pathway Luminaire

Rev. Date: V9 06/07/2021

## Product Description

Durable die-cast aluminum luminaire housing mounts directly to 4" (102mm) diameter pole (included) without visible mounting hardware for clean appearance. Pole mounts to rugged die cast aluminum internal flange secured by three 3/8" - 16x6" anchor bolts with 1-1/4" hook (provided). **Note:** T45 Torx 3/8" socket required for head installation. Top mounted LEDs for superior optical performance and light control.

**Applications:** Landscape, walk-ways and general site lighting


## Performance Summary

Patented NanoOptic® Product Technology
Assembled in the U.S.A. of U.S. and imported parts
<b>CRI:</b> Minimum 70 CRI
<b>CCT:</b> 4000K (+/- 300K), 5700K (+/- 500K) standard
<b>Limited Warranty*:</b> 10 years on luminaire/10 years on Colorfast DeltaGuard® finish

\*See <http://creelighting.com/warranty> for warranty terms

## Accessories

Field-Installed
<b>Upgrade Kit</b> - Used for replacement of existing bollards with a bolt hole circle of 5.75" (146mm) XA-XBP8RSV      XA-XBP8RWH XA-XBP8RBK      XA-XBP8RBZ

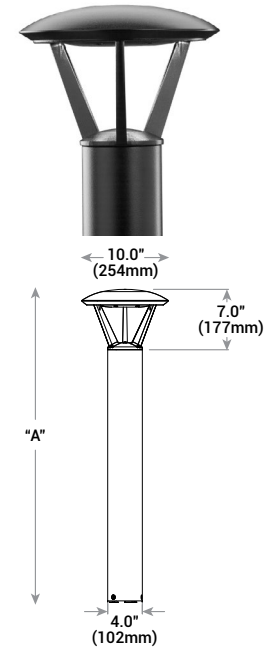

Model	Dim. "A"	Weight*
Landscape (P0)	13" (330mm)	12.7 lbs. (5.8kg)
Landscape (P1)	18" (457mm)	13.3 lbs. (6.0kg)
Pathway (P3)	36" (914mm)	17.9 lbs. (8.1kg)
Pathway (P4)	42" (1068mm)	18.6 lbs. (8.4kg)
Pedestrian (P8)	96" (2438mm)	28.4 lbs (12.9kg)

\* Add 4.5 lbs. (2.0kg) for 347-480V

## Ordering Information

Example: PWY-EDG-2M-P0-02-E-UL-SV-350

PWY-EDG	Optic	Mounting	LED Count (x9)	Series	Voltage	Color Options	Drive Current	Options
PWY-EDG	<b>2M</b> Type II Medium <b>3M</b> Type III Medium <b>5M</b> Type V Medium <b>5S</b> Type V Short	<b>P0</b> 13" (330mm) landscape - Not available with TRL <b>P1</b> 18" (457mm) landscape - Not available with TRL <b>P3</b> 36" (914mm) pathway <b>P4</b> 42" (1067mm) pathway <b>P8</b> 96" (2438mm) pedestrian	02	E	<b>UL</b> Universal 120-277V <b>UH*</b> Universal 347-480V - Available with P3, P4, and P8 mounts only - Not available with TRL <b>12</b> 120V - Available only with TL options <b>27</b> 277V - Available only with TL options	<b>BK</b> Black <b>BZ</b> Bronze <b>SV</b> Silver <b>WH</b> White	<b>350</b> 350mA - Not available with TRL <b>525</b> 525mA - Available with P1, P3, P4, and P8 mounts only	<b>F Fuse</b> - Compatible only with 120V, 277V or 347V (phase to neutral) - Consult factory if fusing is required for 208V, 240V or 480V (phase to phase) - When code dictates fusing, use time delay fuse - Not available with TRL <b>HL Hi/Low (Dual Circuit Input)</b> - Available with UL voltage and 525mA driver current only - Must specify 525mA drive current - Refer to <a href="#">HL spec sheet</a> for details - Sensor not included - Not available with TRL <b>TL Two-Level (175/525 w/integrated sensor control)</b> - Available with 12 or 27 voltages only - Must specify 525mA drive current - Refer to <a href="#">TL spec sheet</a> for details - Not available with TRL <b>TL2 Two-Level (0/350 w/integrated sensor control)</b> - Available with 12 or 27 voltages only - Must specify 350mA drive current - Refer to TL spec sheet for details - Not available with TRL <b>TL3 Two-Level (0/525 w/integrated sensor control)</b> - Available with 12 or 27 voltages only - Must specify 525mA drive current - Refer to TL spec sheet for details <b>WB Welded Base Plate</b> - Standard on P8 mount option, available with P3 and P4 mount - Includes welded base cover <b>40K 4000K Color Temperature</b> - Minimum 70 CRI - Color temperature per luminaire <b>TRL Amber Turtle Friendly LEDs</b> - Available only with P3, P4 and P8 mounts, 120-277 Volt, 525mA drive current, and TL3 or WB options - Lumen multiplier from 5700K, 525mA: 0.41 - Power multiplier from 525mA: 0.75 - 600nm dominant wavelength - Additional shielding (by others) may be required for Florida Fish and Wildlife Conservation Commission compliance

\* 347-480V utilizes magnetic step-down transformer. For input power for 347-480V, refer to the Electrical Data table



US: [creelighting.com](http://creelighting.com) (800) 236-6800

Canada: [creelighting-canada.com](http://creelighting-canada.com) (800) 473-1234

**CREE** LIGHTING®

**Product Specifications**

**CONSTRUCTION & MATERIALS**

- Durable die-cast aluminum luminaire housing mounts directly to 4" (102mm) diameter pole (included) without visible mounting hardware for clean appearance
- Pole mounts to rugged die cast aluminum internal flange secured by three 3/8"-16x6" anchor bolts with 1-1/4" hook (provided).  
**Note:** T45 Torx 3/8" socket required for head installation
- Top mounted LEDs for superior optical performance and light control
- Open design, passive thermal management for superior lumen maintenance
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultradurable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Black, bronze, silver and white are available
- **Weight:** See Dimension and Weight Chart on pages 1 and 4

**ELECTRICAL SYSTEM**

- **Input Voltage:** 120-277V or 347-480V, 50/60Hz, Class 1 drivers
- **Power Factor:** > 0.9 at full load at 120V
- **Total Harmonic Distortion:** < 20% at full load at 120V
- Integral 10kV surge suppression protection standard
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current

**REGULATORY & VOLUNTARY QUALIFICATIONS**

- cULus Listed
- Suitable for wet locations
- Meets IP66 requirements per IEC 60598-1 when ordered without TL options
- ANSI C136.2 10kV surge protection, tested in accordance with IEEE/ANSI C62.41.2
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- Meets Buy American requirements within ARRA
- RoHS compliant. Consult factory for additional details
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov)

Electrical Data*								
LED Count (x9)	System Watts 120-277V	System Watts 347-480V	Total Current (A)					
			120V	208V	240V	277V	347V	480V
350mA								
02	22	28	0.18	0.12	0.10	0.10	0.09	0.13
525mA								
02	34	40	0.29	0.19	0.17	0.15	0.12	0.13

\* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V or 347-480V +/- 10%

THE EDGE® Series Ambient Adjusted Lumen Maintenance <sup>1</sup>						
Ambient	CCT	Initial LMF	25K hr Reported <sup>2</sup> LMF	50K hr Reported <sup>2</sup> LMF	75K hr Estimated <sup>3</sup> LMF	100K hr Estimated <sup>3</sup> LMF
5°C (41°F)	40K/57K	1.04	1.01	0.99	0.98	0.96
	TRL	1.06	1.06	1.06	1.06	1.06
10°C (50°F)	40K/57K	1.03	1.00	0.98	0.97	0.95
	TRL	1.04	1.04	1.04	1.04	1.04
15°C (59°F)	40K/57K	1.02	0.99	0.97	0.96	0.94
	TRL	1.03	1.03	1.03	1.03	1.03
20°C (68°F)	40K/57K	1.01	0.98	0.96	0.95	0.93
	TRL	1.01	1.01	1.01	1.01	1.01
25°C (77°F)	40K/57K	1.00	0.97	0.95	0.94	0.92
	TRL	1.00	1.00	1.00	1.00	1.00

<sup>1</sup> Lumen maintenance values at 25°C (77°F) are calculated per IES TM-21 based on IES LM-80 report data for the LED package and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors. Please refer to the [Temperature Zone Reference Document](#) for outdoor average nighttime ambient conditions.


<sup>2</sup> In accordance with IES TM-21, Reported values represent interpolated values based on time durations that are up to 6x the tested duration in the IES LM-80 report for the LED.

<sup>3</sup> Estimated values are calculated and represent time durations that exceed the 6x test duration of the LED.


**Photometry**

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/bollards-and-pathway/cree-edge-pathway>

**2M**



RESTL Test Report #: PL5758-001  
 PWY-EDG-2M-\*\*-02-E-UL-350-40K  
 Initial Delivered Lumens: 1,549




PWY-EDG-2M-\*\*-02-E-UL-350-40K  
 Mounting Height: 3' [0.9m] A.F.G.  
 Initial Delivered Lumens: 1,565  
 Initial FC at grade


Type II Medium Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
<b>350mA</b>				
02	1,565	B1 U0 G1	1,625	B1 U0 G1
<b>525mA</b>				
02	2,191	B1 U0 G1	2,276	B1 U0 G1

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens  
 \*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

**3M**



RESTL Test Report #: PL5698-001  
 PWY-EDG-3M-\*\*-02-E-UL-350-40K  
 Initial Delivered Lumens: 1,470




PWY-EDG-3M-\*\*-02-E-UL-350-40K  
 Mounting Height: 3' [0.9m] A.F.G.  
 Initial Delivered Lumens: 1,389  
 Initial FC at grade


Type III Medium Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
<b>350mA</b>				
02	1,389	B1 U0 G1	1,442	B1 U0 G1
<b>525mA</b>				
02	1,944	B1 U0 G1	2,019	B1 U0 G1

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens  
 \*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

**5M**



RESTL Test Report #: PL5798-001  
 PWY-EDG-5M-\*\*-02-E-UL-350-40K  
 Initial Delivered Lumens: 1,780



PWY-EDG-5M-\*\*-02-E-UL-350-40K  
 Mounting Height: 3' [0.9m] A.F.G.  
 Initial Delivered Lumens: 1,666  
 Initial FC at grade


Type V Medium Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
<b>350mA</b>				
02	1,666	B1 U2 G1	1,730	B1 U2 G1
<b>525mA</b>				
02	2,333	B2 U2 G2	2,422	B2 U2 G2

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens  
 \*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


**Photometry**

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/bollards-and-pathway/cree-edge-pathway>

55



RESTL Test Report #: PL5759-001  
 PWY-EDG-5S-\*\*-02-E-UL-350-40K  
 Initial Delivered Lumens: 1,897




PWY-EDG-5S-\*\*-02-E-UL-350-40K  
 Mounting Height: 3' [0.9m] A.F.G.  
 Initial Delivered Lumens: 1,868  
 Initial FC at grade

Type V Short Distribution				
LED Count (x9)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,868	B1 U2 G1	1,940	B1 U2 G1
525mA				
02	2,615	B1 U2 G1	2,716	B1 U2 G1

\* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

\*\* For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>

**with Welded Base**

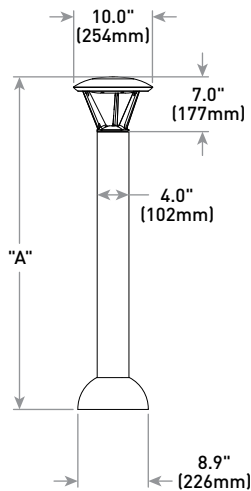

Model	Dim. "A"	Weight*
Pathway (P3)	36" [914mm]	17.9 lbs. [8.1kg]
Pathway (P4)	42" [1068mm]	18.6 lbs. [8.4kg]
Pedestrian (P8)	96" [2438mm]	28.4 lbs [12.9kg]

\* Add 4.5 lbs. [2.0kg] for 347-480V