

NRG®1100FULL CUTOFF
COMPACT WALLPACK

Cat.#

Job

Type

**HUBBELL**
Outdoor Lighting

Approvals

APPLICATIONS


- Use for wall perimeter or entry at mounting heights of 8-15 feet

SPECIFICATIONS

- Hubbell Outdoor Lighting's newest NRG® family to be introduced late in the second quarter 2007 is packed with owner benefits. The StarView compliant optics allow no up light, saving energy and keeping the neighbors happy.
- The decorative styling is also rugged with one piece polycarbonate front, painted bronze or white on the inside, that resists rocks and other small projectiles.
- The die cast housing provides rigid mounting, conduit and photocontrol hubs, easy mount design and heat dissipation.

LISTINGS

- Listed to UL1598 for use in wet locations

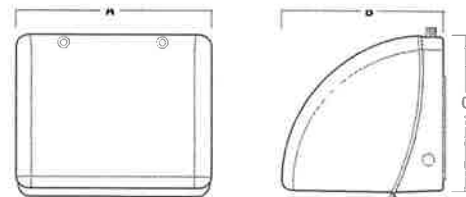PRODUCT IMAGE(S)**DIMENSIONS**

A	B	C
11 3/4"	9 1/2"	9 1/2"
298 mm	241 mm	241 mm

CERTIFICATIONS/LISTINGS**ORDERING INFORMATION**

Catalog Number ¹	Wattage/Voltage	Finish	Weight lbs. (kg)
Pulse Start Metal Halide			
NRG-1111-W	100w 120, 277, 347V	white	12 (5.4)
High Pressure Sodium			
NRG-1112-W	100w 120, 277, 347V	white	10 (4.5)
NRG-1172-W	70w 120, 277, 347V	white	9 (4.1)
Electronic Fluorescent			
NRG-1143-W	42w 120-277V, 60/50hz	white	7 (3)

¹ All fixtures include medium base or compact fluorescent lamps. CFL units use universal socket and are capable of operating 26 or 32w PLT lamps if substituted in the field; CFL lamps are 3500K, GX24q-4 base

ACCESSORIES - Order Separately

Catalog Number	Description
PBT-1	Photocontrol, button type, 120V
PBT-234	Photocontrol, button type, 277V

REPLACEMENT PARTS

Catalog Number	Description
NRG1100FW	Polycarbonate front housing-white, 70w max.
NRG1111FW	Polycarbonate front housing-white, 100w max.

**HUBBELL**
Outdoor Lighting

Hubbell Outdoor Lighting • 701 Millennium Boulevard • Greenville, SC 29607 • Phone: 864-678-1000

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

© 2016 HUBBELL OUTDOOR LIGHTING, All Rights Reserved • For more information visit our website: www.hubbelloutdoor.com • Printed in USA

NRG1100-SPEC 2/16

NAVILITE EXIT & EMERGENCY

REMOTE HEADS

NR Series


PRODUCT SPECIFICATIONS — NRRD SERIES

Construction Round head design • Injection molded, engineering-grade, UV-stable thermoplastic • Impact, scratch, fade and corrosion-resistant • One or two head versions • Off-White (neutral) or black finish.

Lamps Supplied with incandescent wedge base lamps.

Warranty 5-year warranty.

Product specifications subject to change without notice.



ORDERING INFORMATION — Round Remote Lamp Head

Series	Style	Number of Heads	Finish	Lamp Type	Example Cat. #
NR	RD-Round	1-One 2-Two	WH-White	6V5-6V, 5.4W 6V7-6V, 7.2W 6V9-6V, 9W 12V7-12V, 7.2W 12V9-12V, 9W 12V12-12V, 12W	NRRD2WH12V12


PRODUCT SPECIFICATIONS — NRMR SERIES

Construction Weatherproof – suitable for use in wet locations • Suitable for indoor or outdoor use • Injection molded, engineering-grade, UV-stable thermoplastic heads • Impact, scratch, fade and corrosion-resistant • Gasketed tempered glass lenses • Sealed and gasketed die-cast aluminum J-box cover • One or two head versions • Industrial gray finish.

Lamps Supplied with incandescent wedge base lamps.

Warranty 5-year warranty.

Product specifications subject to change without notice.



ORDERING INFORMATION — Weatherproof Remote Lamp Head

Series	Style	Number of Heads	Finish	Lamp Type	Example Cat. #
NR	WP-Weatherproof	1-One 2-Two	GY-Gray	6V5-6V, 5.4W 6V7-6V, 7.2W	NRWP1GY6V7



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (847) 827-9880 • Fax (847) 827-2925
 220 Chrysler Drive • Brampton, Ontario • Canada L6S 6B6 • Phone (905) 792-7335 • Fax (905) 792-0064
 Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2016 Acuity Brands Lighting, Inc.