

Spectra Bond® Chain Link



Spectra Bond® Color Chain Link... made to withstand

Spectra Bond® is a step above for Master Halco's color commercial and industrial chain link fence systems. It is extruded bonded wire, which is a better alternative to simple extruded wire. The adhesive added before the wire is extruded seals the vinyl to the wire. This ensures years of attractive and reliable performance with a better protection against nature.

Ball Parks



Perimeter Fence



Tennis Courts



Our Spectra Bond® Fencing System

Premium quality fabric and framework is guaranteed for 15 years.



15 Year Warranty



Meets and Exceeds
all ASTM Standards

Features and Benefits:

- Zinc-coated steel framework is thoroughly cleaned during the pre-treatment process, then color coated with a 3 mil minimum polyester layer for protection from corrosion.
- All galvanized wire has a 15 mil minimum extruded and adhered polyvinyl chloride coating for dual protection from corrosion and the elements.
- Fittings are made of galvanized steel with a 3 mil minimum of polyester coating for added protection.



Schools



Government Facilities



High-Security Facilities



Available Colors

Choose from 3 Spectra Bond® colors that will enhance any installation and blend in beautifully with any environment.



Midnight Black



Forest Green



Sierra Brown

Available Wire Gauges (Finish and Core)

Use the core gauge number when ordering.

6 gauge finish
9 gauge core



8 gauge finish
11 gauge core




9 gauge finish
12 gauge core



11 gauge finish
14 gauge core



Available Mesh Sizes

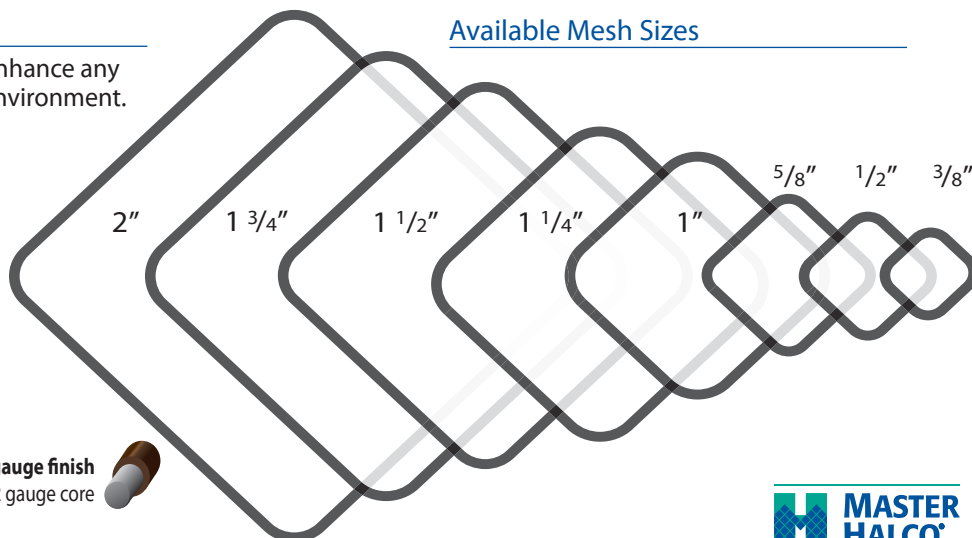

Spectra Bond® Color Chain Link Recommendations

FABRIC

Spectra Bond® Polymer Coating Extruded and Adhered to Zinc-Coated Steel Wire per ASTM F 668 Class 2a.

Fabric Gauge	6 gauge, 9 gauge, 10 gauge, and 11 gauge core
Fabric Mesh	3/8", 1/2", 5/8", 1", 1-1/4", 1-1/2", 1-3/4", and 2"
Fabric Height	3', 42", 4', 5', 6', 7', 8', 9', 10', and 12'
Fabric Selvage	Knuckle - Knuckle (KK) for 5' and Under; for mesh sizes 1" and smaller. Knuckle - Knuckle (KK) or Knuckle - Twist (KT) for 6' and over.

FRAMEWORK - TYPE 1

Spectra® Polyester, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1a, standard weight pipe, schedule 40. Hot-dipped galvanized with a minimum average 1.8 ounces per square foot of zinc-coated surface area.
Note: Heavy Mil Schedule 40 available upon request.

FRAMEWORK - TYPE 2

Spectra® Polyester, 3 mils minimum, over galvanized steel ASTM F 1043, Group 1c, with a minimum yield strength of 50,000 PSI. Protective coating per ASTM F 1043, external coating type B, zinc with organic overcoat, 0.9 ounces per square foot minimum zinc coating with chromate conversion coating and verifiable polymer film.
Note: Heavy Mil Schedule 40 available upon request.

Top Rail	1-5/8" O.D. Polyester Standard Weight Pipe (0.140" wall thickness, 2.27 lb./ft.)	1-5/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.111" wall thickness, 1.83 lb./ft.)
Line Posts	2-3/8" O.D. Polyester Standard Weight Pipe (0.154" wall thickness, 3.65 lb./ft.)	2-3/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.130" wall thickness, 3.12 lb./ft.)
Terminal Posts	2-7/8" O.D. Polyester Standard Weight Pipe (0.203" wall thickness, 5.79 lb./ft.)	2-7/8" O.D. Polyester Deluxe Quality (DQ) Pipe (0.160" wall thickness, 4.64 lb./ft.)

Gates

Fabric	Same Gauge and Mesh as Chain Link Selected
Frame	Same as Top Rail Selected

Fittings

Tension and Brace Bands	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel
Caps, Eye Tops, Rail Ends	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Pressed Steel or Aluminum
Sleeves	Polyester Coating, 3 Mils Minimum, Over Hot-Dipped Galvanized Steel
Tie Wires	Polyester Coating, 3 Mils Minimum, Over Zinc-Coated Steel Wire


Slats - Privacy

Material Composition	Polyethylene Thermoplastic
Colors	Green, Black, Brown, Gray, Redwood, Blue, Desert Sand

MasterHalco.com | 888-MH-Fence

Branch service centers are located throughout North America.

MH Digital ©9/18

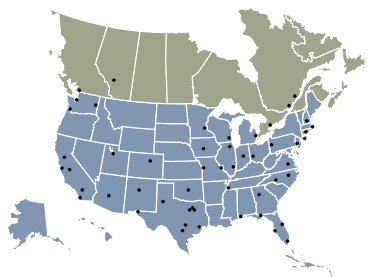

Available from: