
## ALL EROSION CONTROL MEASURES TO BE INSTALLED AND MAINTAINED PER WDNR STANDARDS

http://dnr.wi.gov/org/water/wm/nps/stormwater/techstds.htm

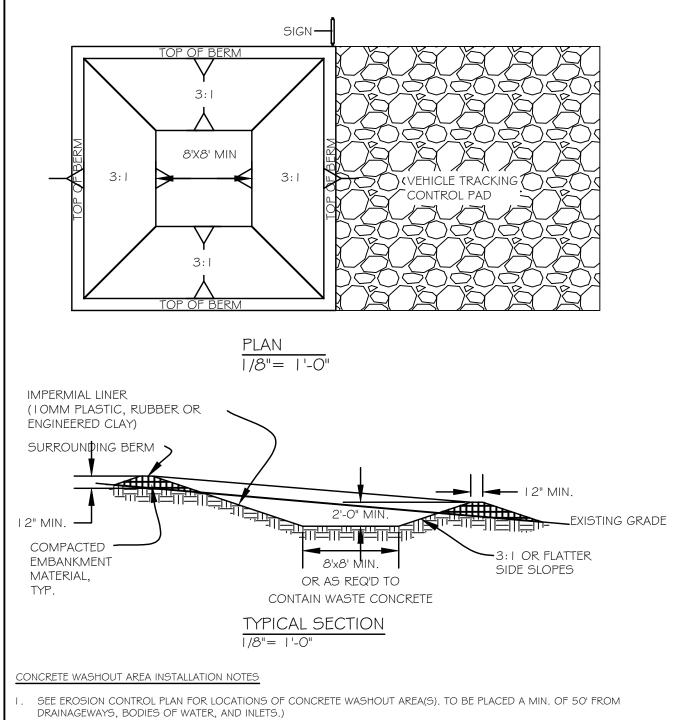



5. EXCAVATED MATERIAL SHALL BE UTILIZED IN PERIMETER BERM CONSTRUCTION.


## CONCRETE WASHOUT AREA MAINTENANCE NOTES

- THE CONCRETE WASHOUT AREA SHALL BE REPAIRED AND ENLARGED OR CLEANED OUT AS NECESSARY TO MAINTAIN CAPACITY FOR
- . AT THE END OF CONSTRUCTION, ALL CONCRETE SHALL BE REMOVED FROM SITE AND DISPOSED OF AT AN APPROVED WASTE SITE.
- WHEN CONCRETE WASHOUT AREA(S) IS REMOVED, THE DISTURBED AREA SHALL BE STABILIZED PER SITE EROSION CONTROL
- INSPECT WEEKLY AND DURING AND AFTER ALL STORM EVENTS, CLEAN-OUT OR COVER WASHOUT AREA PRIOR TO PREDICTED STORM EVENTS TO PREVENT OVER-FLOW.

CONCRETE WASHOUT AREA

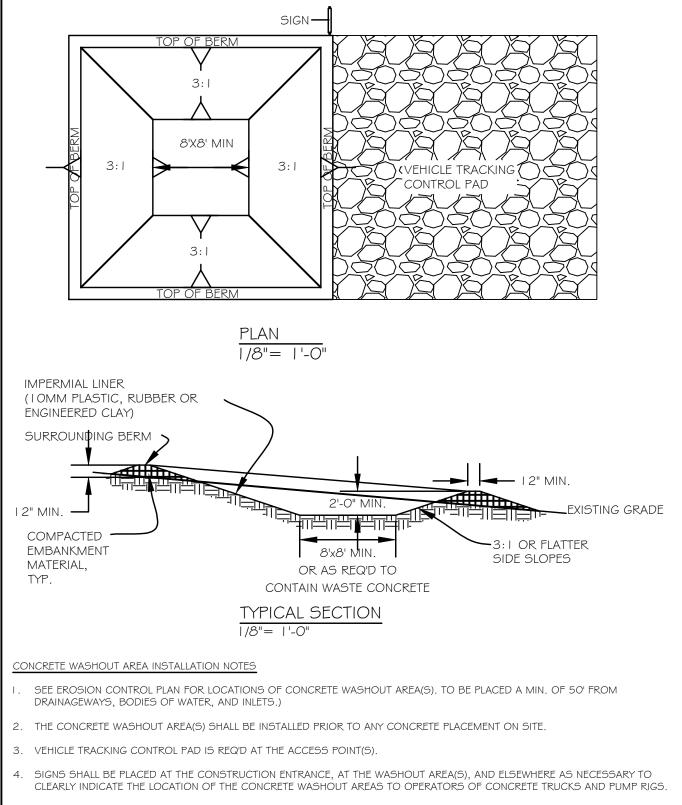

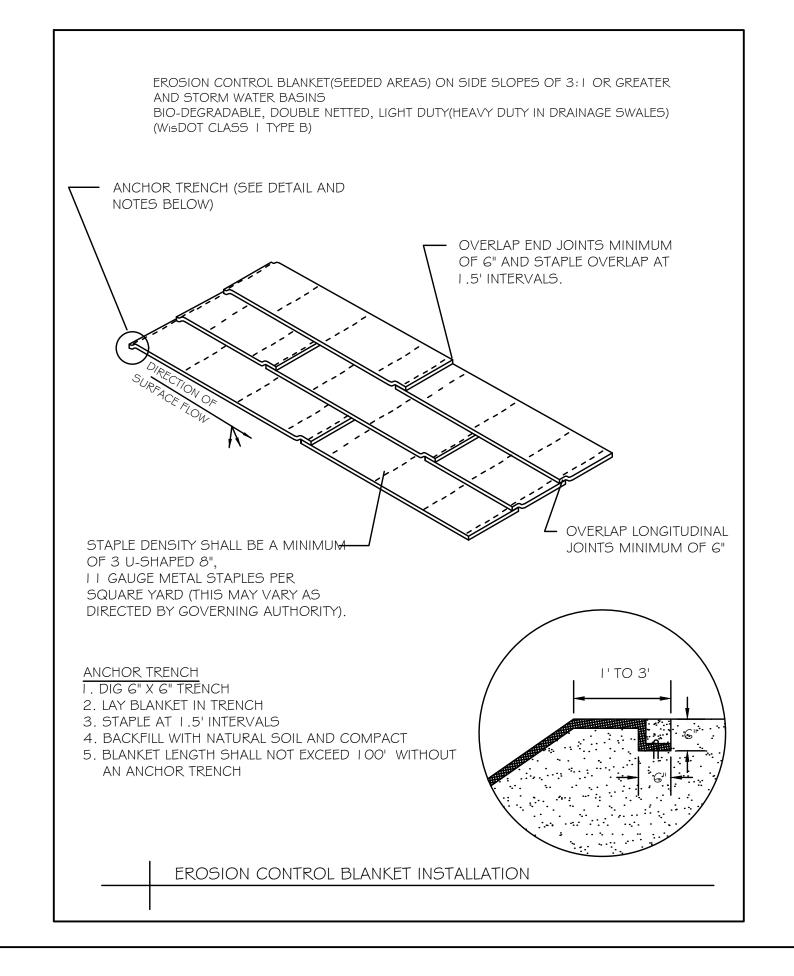

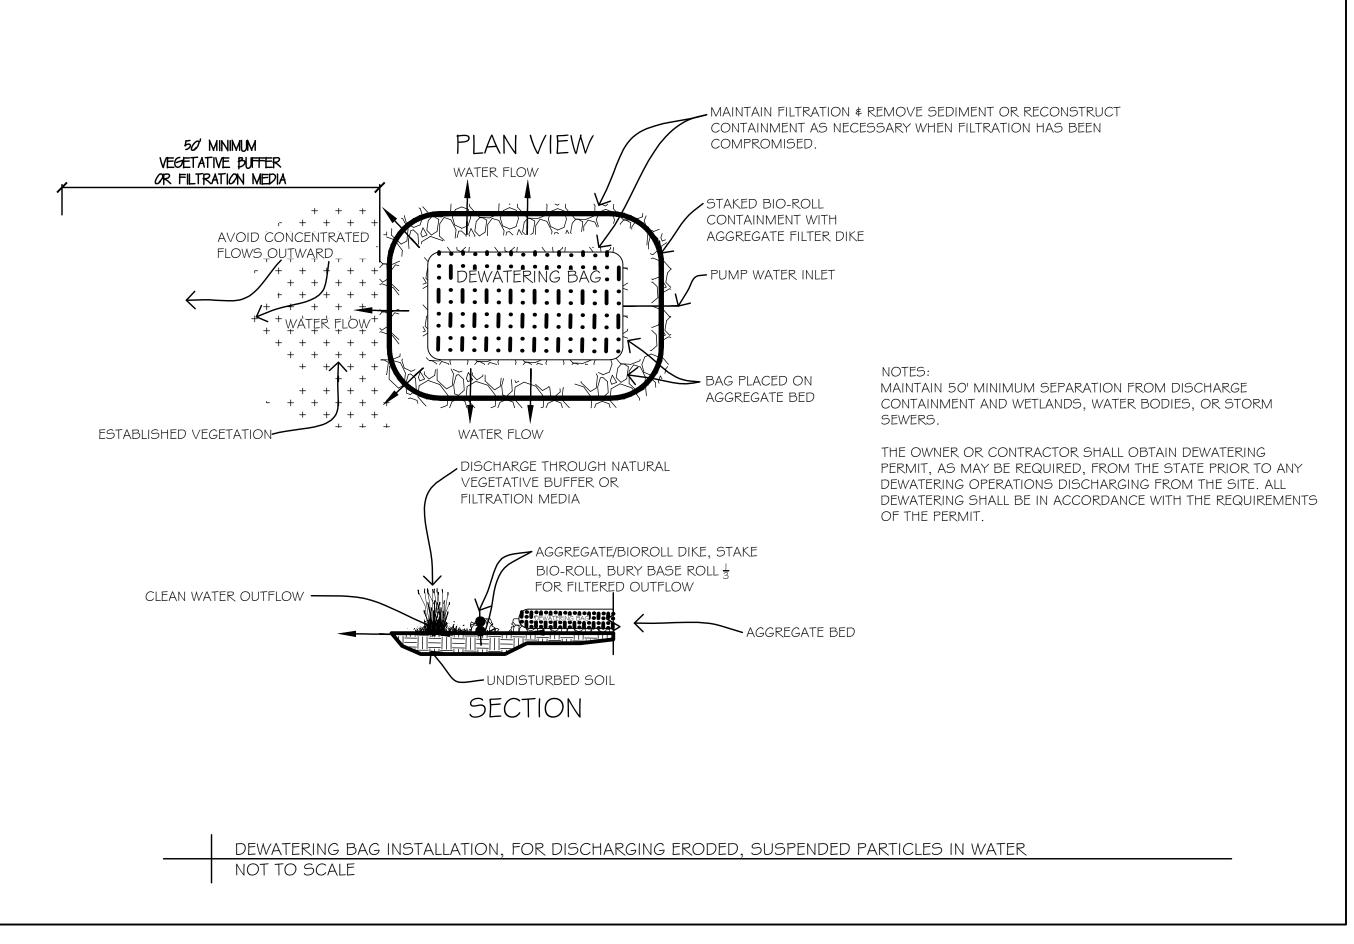





KWIK TRIP, Inc. P.O. BOX 2107 1626 OAK STREET LA CROSSE, WI 54602-2107 PH. (608) 781-8988 FAX (608) 781-8960



AL 0 # N N

T AVENUE WI 2106 S. WEST WAUKESHA, \

SWP4

DATE DESCRIPTION DRAWN BY RAS GRAPHIC 3190495 2020-05-04

SHEET

