
## BRIAN ARCHITECTURAL SCALE, WET-LISTED EXTERIOR WALL SCONCE







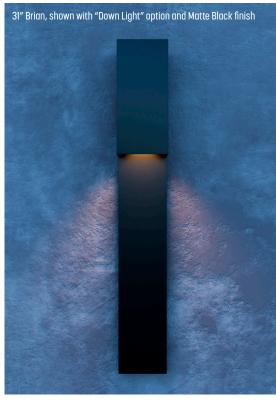


APPLICATIONS	Indirect wall grazing luminaire for exterior/interior use: flanking doors, on columns, on building facades, between windows. Suitable for marine environments
SIZES	<ul> <li>15.5"H x 7"W x 4"D</li> <li>31"H x 7"W x 4"D</li> <li>46.5"H x 7"W x 4"D</li> </ul>
WEIGHT	<ul> <li>15.5"H - 6 lb</li> <li>31"H - 8 lb</li> <li>46.5"H - 10 lb</li> </ul>
MOUNTING	<ul> <li>Steel mounting system with mounting plate and cover with rubber gaskets between the junction box and mounting plate</li> <li>Mounts to center of J-box at 5.5" from top of rectangular shade</li> </ul>
SPECIFICATIONS	<ul> <li>Dark Sky Compliant, Full cut-off (applies to "Down Light" version)</li> <li>High efficiency, fully integrated proprietary LED module</li> <li>IP66 Rated</li> <li>120-277V input</li> <li>100,000+ hours rated life time</li> <li>10 Year Limited Warranty (excludes shade)</li> <li>Title 24 Compliant</li> <li>ADA Compliant</li> </ul>
LAMPING	<ul> <li>3000K and 3500K</li> <li>20W (2000 lumens, LED light module)</li> <li>0-10V Dimming (100-10%)</li> </ul>
CONSTRUCTION	Manufactured from aluminum with industrial powder coat finish

SPECIFICATIONS SUBJECT TO CHANGE

## BRIAN ARCHITECTURAL SCALE, WET-LISTED EXTERIOR WALL SCONCE




## **Design Options**

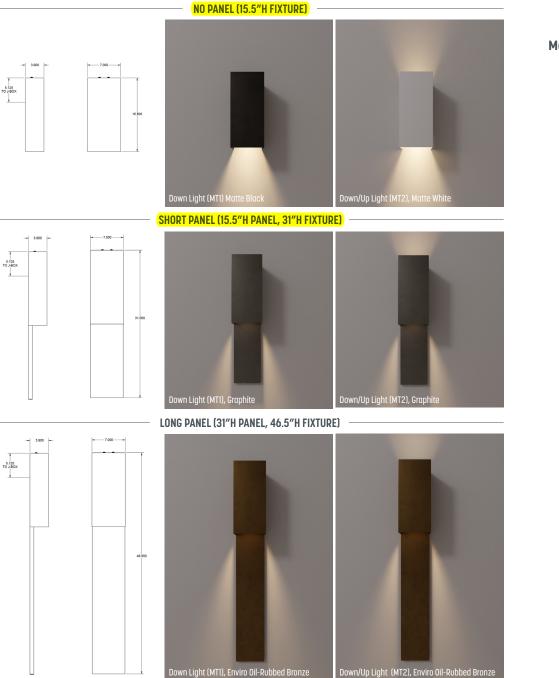

## **Metal Powder Coat Finish Options**



BLK - Matte Black

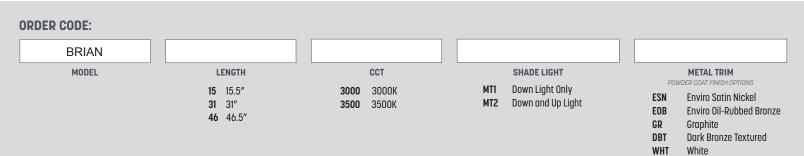

- WHT BLK
  - Black