


SITE LIGHTING FIXTURE SCHEDULE								
Tag	Mount	Lumens	Color Temp.	Load	Description	Manufacturer	Model	Photometric File Name
C1	CANOPY	1218 lm	3200 K	12 VA	Surface Mount 7" Round Downlight, Mount to Canopy over Entrance.	Juno	JSF 7IN 10LM SSW5 90CRI MVOLT ZT BL LGL	JSF 7IN 10LM 30K 90CRI MVOLT ZT WH.ies
C2	CANOPY	5548 lm	3000 K	43 VA	LED Parking Garage and Canopy Luminaire. T5R Optics. Surface Mount to Canopy over Overhead Door.	Lithonia	VCPGX LED V4 P3 30K 80CRI T5R MVOLT SRM DBLXD	VCPGX LED V4 P3 30K 70CRI T5R.ies
P1	POLE	6018 lm	3000 K	45 VA	Pole Mounted Area Light, Mount at 15' AFG. Type 3 Optics	Lithonia	DSX0 LED P2 30K 80CRI T4M MVOLT SPA DBLXD	DSX0 LED P2 30K 80CRI T4M.ies
P2	POLE	6018 lm	3000 K	45 VA	Existing Pole Mounted Area Light to Remain.	EX	EX	DSX0 LED P2 30K 80CRI T4M.ies
POLE	SEE DETAIL			N/A	4" SQUARE POLE, 15FT AFG (13' POLE ON 2' CONCRETE BARRIER WITH 2" DIAMETER)	Lithonia	SSS 13' DBLXD	
WP1	WALL	1161 lm	3000 K	10 VA	Wallpack, full cutoff, fully shielded LED Wall Pack. Mount above exterior door.	Lithonia	WDGE1 LED P1 30K 80CRI VF MVOLT SRM PE DBLXD	WDGE1 LED P1 30K 80CRI VF.ies
WP2	WALL	3881 lm	3000 K	47 VA	Wallpack, full cutoff, fully shielded LED Wall Pack. Mount at 15' AFG	Lithonia	WDGE2 LED P4 30K 80CRI T2M MVOLT SRM PE DBLXD	WDGE2 LED P4 30K 80CRI T2M.ies

Photometric Results					
Calculation Points Name	Average	Maximum	Minimum	Avg/Min	Max/Min
Parking/Drive	3 fc	11 fc	1 fc	4.984968	15.668337
Overall	1 fc	11 fc	0 fc	0	0
West Property Line	0 fc	0 fc	0 fc	0	0
North Property Line	1 fc	1 fc	0 fc	14.126283	21.245488
East Property Line	3 fc	6 fc	1 fc	2.71037	5.19609

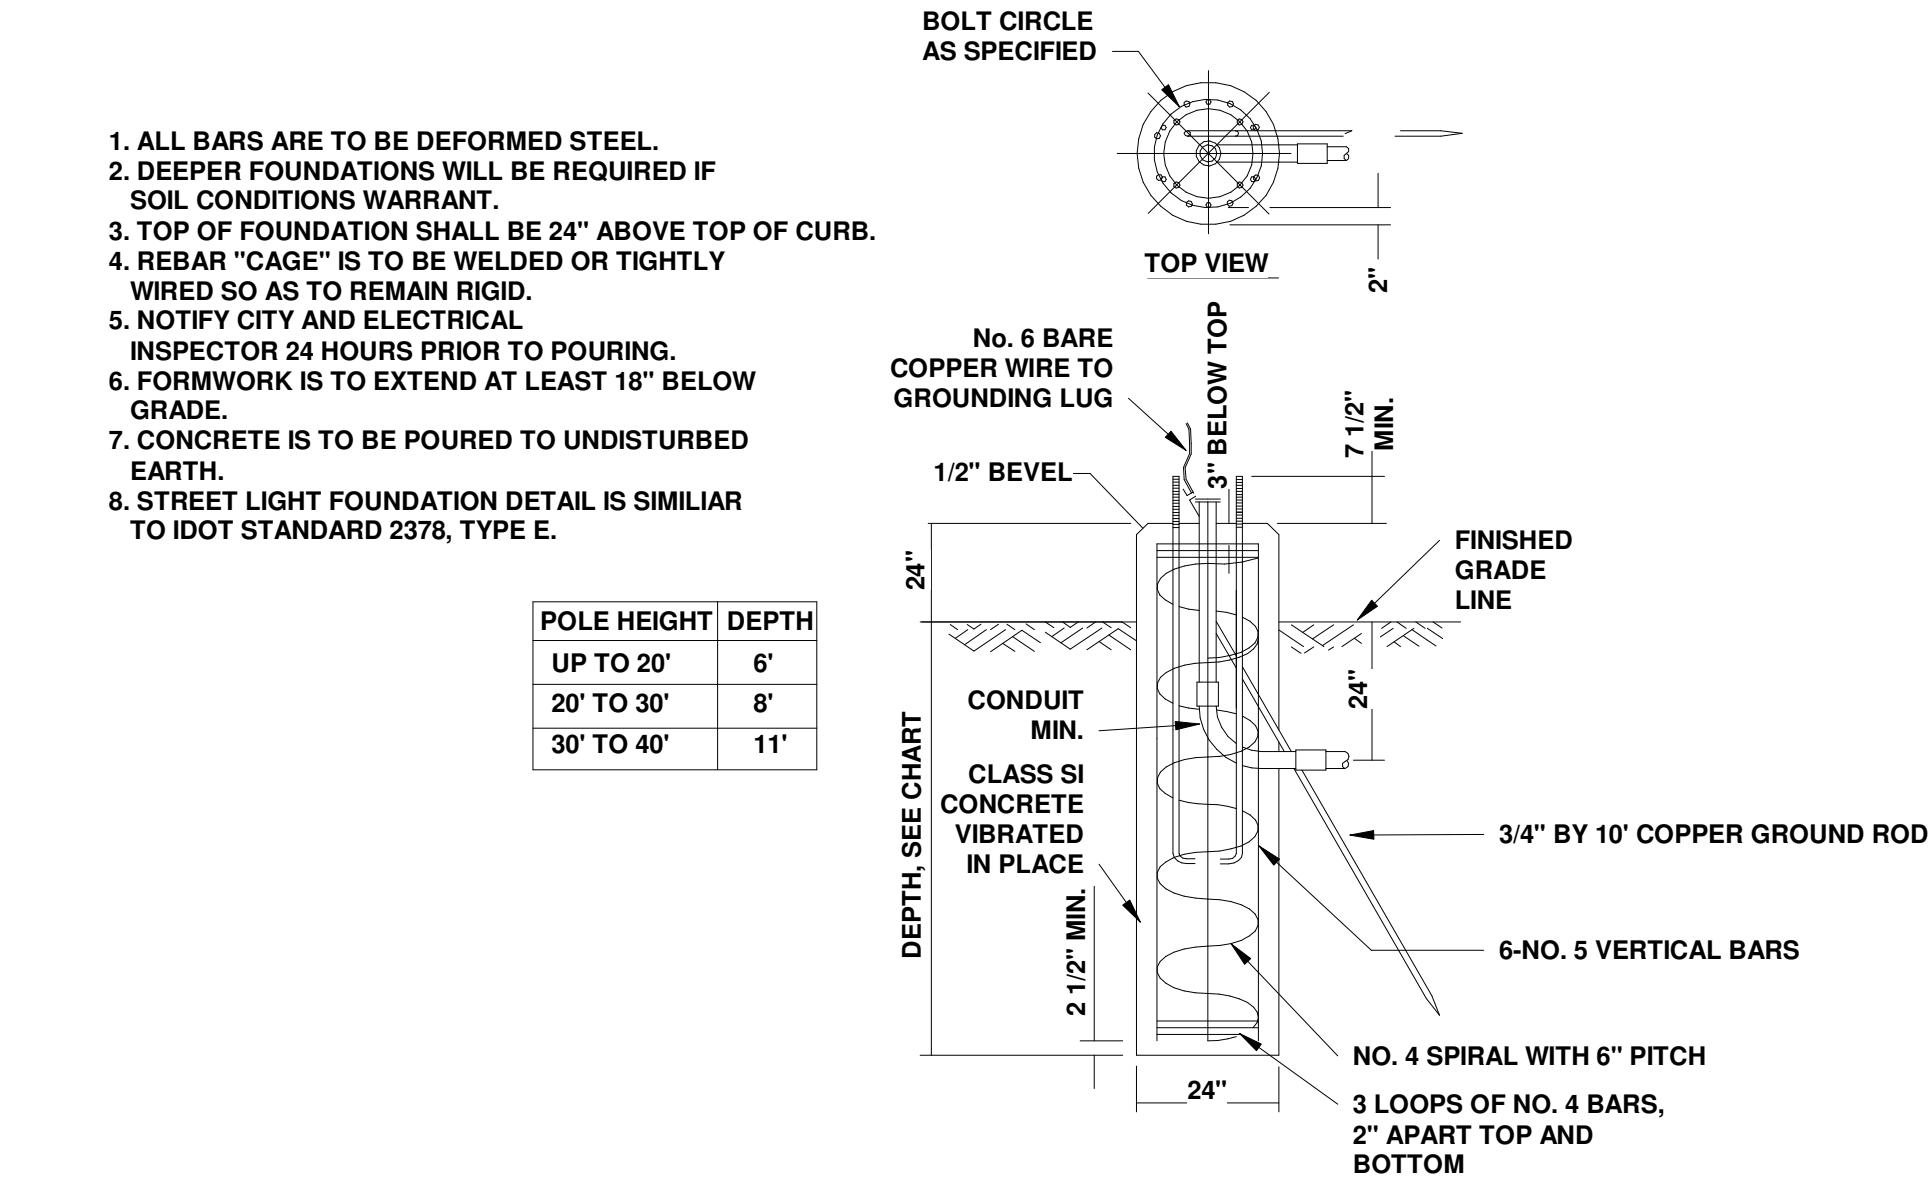

2 Light Pole Installation Detail  
NTS

Bleck & Bleck Architects  
www.bleckarchitects.com

200 East Church Street  
Libertyville, Illinois 60048

Office 847 · 247 · 0303  
Fax 847 · 247 · 1737  
Chuck's Email: cbleck@bleckarchitects.com  
Robert's Email: rbleck@bleckarchitects.com

CONTRACTOR



4125 TERMINAL DR.  
Suite 100  
McFarland, WI 53558

2417 Silvernail Road  
Waukesha, WI

Plotted: ----

For Review - October 15, 2025  
Revisions:

Sheet: **PM1**  
of:

Project No. 4112





# VCPGX Ultimate LED Parking Garage




## Specifications

**Diameter:** 19"

**Height:** 4.95"  
(6" with Up-Light)

**Weight** 25 lbs  
(max, with no options):

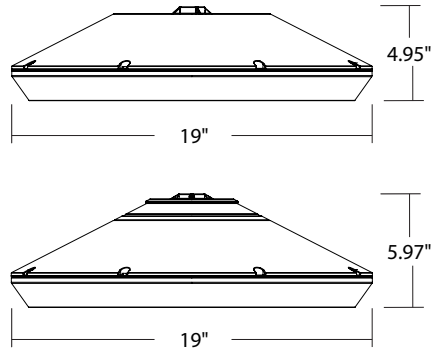

A+ Capable options indicated by this color background.

Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Introduction

The all new VCPGX LED (Visually Comfortable Parking Garage) luminaire is the ultimate solution for parking garage applications. The deep recessed lens design of VCPGX LED minimizes high angle glare, while its patent pending transition zone reduces the contrast ratio between the luminaire and the dark ceiling. The dedicated up-light module option further reduces this contrast, creating a more visually comfortable environment.

The VCPGX LED delivers up to 87% in energy savings when replacing 175W metal halide luminaires. With over 100,000 hour life expectancy (12+ years of 24/7 continuous operation), the VCPGX LED luminaire provides significant maintenance savings over traditional luminaires.

## Ordering Information

EXAMPLE: VCPGX LED V8 P3 40K 70CRI T5M MVOLT PM UPL2 DWHXD

VCPGX LED							
Series	LED Light Engines	Package	Color temperature	Color Rendering Index	Distribution	Voltage	Mounting
VCPGX LED	V4 4 Light Engines V8 8 Light Engines	P1 P2 P3 P4 P5 P6 P7 (with V8 only)	30K 3000 K 35K 3500 K 40K 4000 K 50K 5000 K	70CRI 80CRI	T5M Type V, medium T5R Type V, rectangular T5W Type V, wide T5E Type V entry LANE <sup>1</sup> Drive lane	MVOLT 347 480  347 480	For ordering with fuse 120 208 240 277 347 480  <b>Shipped included</b> PM Pendant mount standard (24-inch length supply leads) SRM Surface mount (24-inch length supply leads) ARM Arm mount (use RSXWBA accessory to mount to a wall)  <b>Shipped separately</b> YK Yoke/trunnion mount <sup>2</sup>

Options	Finish (required)
<b>Shipped installed</b> UPL1 Up-Light: 500 lumens <sup>3</sup> UPL2 Up-Light: 700 lumens <sup>4</sup> E7WC Emergency battery backup, AC Activate, Certified in CA Title 20 MAEDBS (7W, -20°C min) <sup>5,6,7</sup> E10WH Emergency battery backup, AC Activate, Certified in CA Title 20 MAEDBS (10W, 0°C min) <sup>5,6,7</sup> E18WC Emergency battery backup, AC Activate, Certified in CA Title 20 MAEDBS (18W, -20°C min) <sup>5,6,7</sup> HA High ambient (50°C, only P1-P4) SF Single fuse (120V, 277V, 347V) DF Double fuse (208V, 240V, 480V) SPD10KV 10KV Surge Pack LDS36 36in (3ft) lead length LDS72 72in (6ft) lead length LDS108 108in (9ft) lead length DMG External 0-10V leads (no controls) <sup>9</sup> TP Tamper proof screws	<b>Standalone Sensors/Controls</b> PIR Motion/ambient sensor for 8-15' mounting heights PIRH Motion/ambient sensor for 15-30' mounting heights PIR3FC3V Motion/ambient sensor for 8-15' mounting heights, pre programmed to 3fc and 35% light output PIRH3FC3V Motion/ambient sensor for 15-30' mounting heights, pre programmed to 3fc and 35% light output  <b>Networked Sensors/Controls</b> NLTAIR2 PIR nLIGHT AIR Wireless enabled motion/ambient sensor for 8-15' mounting heights <sup>10</sup> NLTAIR2 PIRH nLIGHT AIR Wireless enabled motion/ambient sensor for 15'-30' mounting heights <sup>10</sup> NLTAIREM2 PIR nLIGHT AIR Wireless enabled, UL924 Listed motion/ambient sensor for 8-15' mounting heights <sup>9,10</sup> NLTAIREM2 PIRH nLIGHT AIR Wireless enabled, UL924 Listed motion/ambient sensor for 15'-30' mounting heights <sup>9,10</sup>
<b>Shipped Separately</b> BDS Bird Shroud BSW Bird Spikes	DWHXD White DNAXD Natural aluminum DDBXD Dark bronze DBLXD Black



COMMERCIAL OUTDOOR

1 Acuity Way • Decatur, Georgia 30035 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2018-2025 Acuity Brands Lighting, Inc. All rights reserved.

VCPGX LED  
Rev. 10/08/25

## Ordering Information Cont.

### Accessories

Ordered and shipped separately.

VCPGBDS DWHXD U	Bird shroud for PM (specify finish)
VCPGBDS YK DWHXD U	Bird shroud for YK (specify finish)
VCPGUBDS DWHXD U	Bird shroud for PM with Up-Light (specify finish)
VCPGUBDS YK DWHXD U	Bird shroud for YK with Up-Light (specify finish)
VCPGSRM U	Surface mount kit, with no Up-Light
VCPGUSRM U	Surface mount kit, with Up-Light
VCPGWG U	Wire guard
SLVSQ	Quick mount pendant swivel kit, square
SLVRD	Quick mount pendant swivel kit, round
VCPG YK DWHXD U	Yoke mount kit (specify finish)
RSXWBA DWHXD U	RSX WBA wall bracket (specify finish)
VCPGSC120	Safety cable 120"


### NOTES

- 1 Not available in P7 package or with V8 option.
- 2 Only vertical height adjustment. No angle adjustment. Use PM and SLVSQ or SLVRD for mounting to angled ceiling or canopies.
- 3 UPL1 not available with dim-to-off functionality.
- 4 UPL2 available with dim-to-off upon request.
- 5 Not available with 347V or 480V.
- 6 E7WC, E10WH, and E18WC only rated up to 35°C ambient.
- 7 E7WC and E18WH only available with P1-P4 packages. E10WH available with P1-P5 packages..
- 8 DMG option not available with standalone or networked sensors/controls.
- 9 Needs an nLight AIR Normal Power Sensing (NPS) device in the group.
- 10 Will need a junction box extension if surface mounted.


## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the [VCPG Ultimate LED Parking Garage Luminaire homepage](#). Tested in accordance with IESNA LM-79 and LM-80 standards


VCPG LED P4 T5M 40K

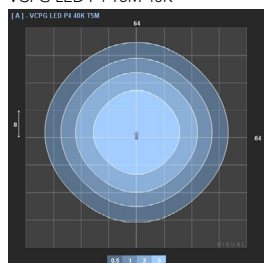


VCPG LED P4 T5E 40K

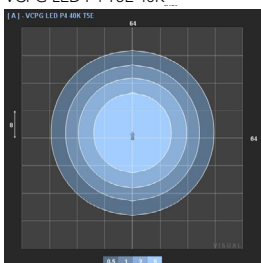


VCPG LED P4 T5W 40K

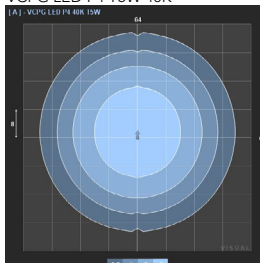

VCPG LED P4 T5R 40K

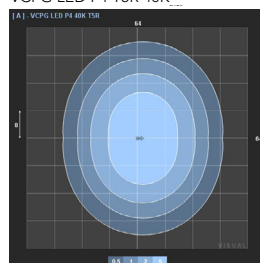

VCPG LED P4 LANE 40K

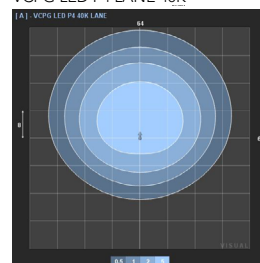

## Performance Data

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient	Lumen Multiplier
0°C	1.03
10°C	1.02
20°C	1.01
25°C	1
30°C	0.99
40°C	0.98

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.97	0.94	0.89

### Electrical Load

Power Package	System Watts	Current (A)					
		120V	208V	240V	277V	347V	480V
P1	27W	0.22	0.13	0.12	0.10	0.08	0.06
P2	34W	0.28	0.16	0.14	0.13	0.10	0.08
P3	43W	0.37	0.21	0.18	0.16	0.13	0.09
P4	56W	0.48	0.28	0.24	0.21	0.16	0.12
P5	82W	0.68	0.40	0.35	0.30	0.24	0.18
P6	108W	0.91	0.52	0.45	0.39	0.32	0.23
P7	124W	1.03	0.59	0.51	0.44	0.37	0.27



COMMERCIAL OUTDOOR

1 Acuity Way • Decatur, Georgia 30035 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2018-2025 Acuity Brands Lighting, Inc. All rights reserved.

VCPGX LED  
Rev. 10/08/25

## Performance Data

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

### Lumen Output, V4 Option

Performance Package	Watts	Distribution Type	30K (3000K, 70 CRI)		35K (3500K, 70 CRI)		40K (4000K, 70 CRI)		50K (5000K, 70 CRI)	
			Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
P1	27W	TSE	3,546	133	3,634	137	3,778	142	3,838	144
		TSM	3,573	134	3,662	138	3,807	143	3,867	146
		TSW	3,509	132	3,596	135	3,738	141	3,798	143
		TSR	3,421	129	3,506	132	3,645	137	3,703	139
		LANE	3,380	127	3,464	130	3,601	136	3,658	138
P2	34W	TSE	4,532	133	4,644	137	4,828	142	4,905	144
		TSM	4,567	134	4,680	138	4,865	143	4,942	146
		TSW	4,484	132	4,595	135	4,777	141	4,853	143
		TSR	4,372	129	4,481	132	4,658	137	4,732	139
		LANE	4,320	127	4,427	130	4,602	136	4,676	138
P3	43W	TSE	5,750	133	5,893	136	6,126	141	6,223	143
		TSM	5,795	134	5,938	137	6,173	142	6,271	145
		TSW	5,690	131	5,832	134	6,062	140	6,158	142
		TSR	5,548	128	5,686	131	5,910	136	6,004	138
		LANE	5,482	126	5,618	130	5,840	135	5,933	137
P4	56W	TSE	7,318	130	7,500	133	7,796	138	7,920	141
		TSM	7,375	131	7,558	134	7,856	140	7,981	142
		TSW	7,242	129	7,421	132	7,714	137	7,837	139
		TSR	7,061	125	7,236	129	7,522	134	7,641	136
		LANE	6,977	124	7,150	127	7,432	132	7,550	134
P5	82W	TSE	10,088	123	10,339	126	10,747	131	10,918	133
		TSM	10,166	124	10,418	127	10,830	132	11,002	134
		TSW	9,982	122	10,230	125	10,634	129	10,803	132
		TSR	9,733	118	9,974	121	10,368	126	10,534	128
		LANE	9,617	117	9,856	120	10,245	125	10,408	127
P6	108W	TSE	12,751	118	13,067	121	13,583	126	13,799	128
		TSM	12,849	119	13,168	122	13,688	127	13,906	129
		TSW	12,617	117	12,930	120	13,441	125	13,655	127
		TSR	12,302	114	12,607	117	13,105	122	13,313	124
		LANE	12,155	113	12,457	116	12,948	120	13,155	122

### Up-light Lumen Output

Up-light Option	Watts	Lumens
UPL1	6.5W	519
UPL2	8.5W	715

### Lumen Multiplier for 80CRI

CCT	Multiplier
30K	0.926
35K	0.945
40K	0.967
50K	0.965

### Lumen Output, V8 Option

Performance Package	Watts	Distribution Type	30K (3000K, 70 CRI)		35K (3500K, 70 CRI)		40K (4000K, 70 CRI)		50K (5000K, 70 CRI)	
			Lumens	LPW	Lumens	LPW	Lumens	LPW	Lumens	LPW
P1	26W	TSE	3,639	140	3,729	143	3,876	149	3,938	151
		TSM	3,667	141	3,758	145	3,906	150	3,968	153
		TSW	3,600	138	3,690	142	3,835	148	3,897	150
P2	33W	TSE	4,650	140	4,765	143	4,954	149	5,033	151
		TSM	4,686	141	4,802	144	4,992	150	5,071	152
		TSW	4,601	138	4,715	142	4,901	147	4,980	150
P3	42W	TSE	5,900	139	6,047	143	6,286	148	6,386	151
		TSM	5,946	140	6,093	144	6,334	149	6,435	152
		TSW	5,839	138	5,984	141	6,220	147	6,319	149
P4	55W	TSE	7,509	136	7,696	139	7,999	145	8,127	147
		TSM	7,567	137	7,755	140	8,061	146	8,189	148
		TSW	7,431	135	7,615	138	7,916	143	8,042	146
P5	81W	TSE	10,351	129	10,608	132	11,027	137	11,203	139
		TSM	10,431	130	10,690	133	11,112	138	11,289	140
		TSW	10,242	127	10,497	130	10,911	136	11,085	138
P6	106W	TSE	13,083	124	13,408	127	13,937	132	14,159	134
		TSM	13,184	125	13,511	128	14,045	133	14,268	135
		TSW	12,946	123	13,267	126	13,791	131	14,011	133
P7	124W	TSE	15,350	124	15,730	127	16,351	132	16,612	134
		TSM	15,468	125	15,851	128	16,477	133	16,740	135
		TSW	15,189	122	15,566	126	16,180	130	16,438	133



## Control/Sensor Options

### Motion/Ambient Sensor (PIR\_, PIRH)



Motion/Ambient sensor (Sensor Switch MSOD, nLight AIR RMSOD) is integrated into the luminaire. The sensor provides both Motion and Daylight based dimming of the luminaire. For motion detection, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment. The integrated photocell enables additional energy savings during daytime periods when there is sufficient daylight. Optimize sensor coverage by either selecting PIR or PIRH option. PIR option comes with a sensor lens that is optimized to provide maximum coverage for mounting heights between 8-15ft, while PIRH is optimized for 15-40ft mounting height.

### Networked Control (NLTAIR2)

nLight® AIR is a wireless lighting controls platform that allows for seamless integration of both indoor and outdoor luminaires. Five-tier security architecture, 900 MHz wireless communication and app (CLAIRITY™+) based configurability combined together make nLight® AIR a secure, reliable and easy to use platform.


#### PIR

##### HIGH VIEW

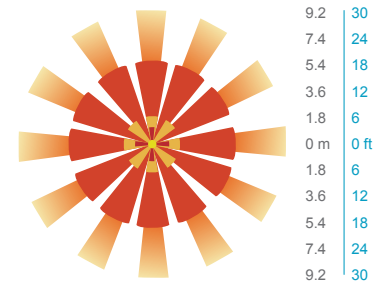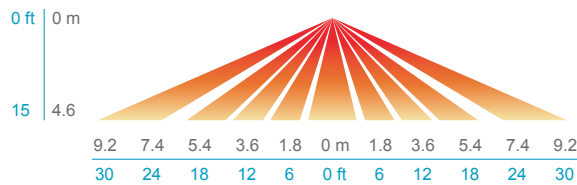


#### PIRH

##### SIDE VIEW

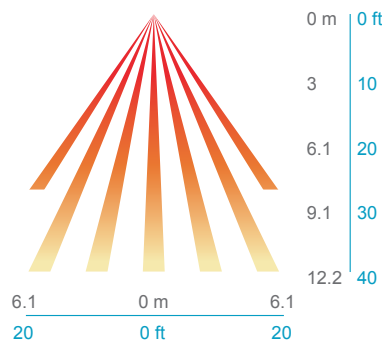


##### TOP VIEW

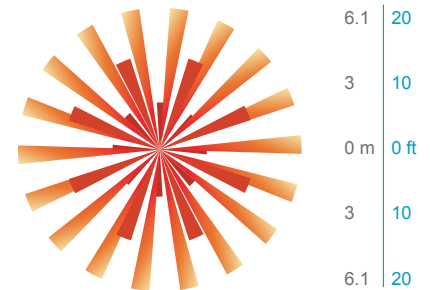

### Motion/Ambient Sensor Default Settings

Option	Dim Level	High Level (when triggered)	Photocell Operation	Motion Time Delay	Ramp-down Time	Ramp-up Time
PIR or PIRH	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
PIR3FC3V or PIRH3FC3V	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 3fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec

## Mounting, Options & Accessories



**PM – Pendant Mount**  
(compatible with ¾ NPT,  
pendant stem provided by  
others)

D = 19"  
H = 4.1"



**SRM – Surface Mount**

D = 19"  
H = 4.1"



**SRM – Surface Mount  
with Up-Light**

D = 19"  
H = 5.3"



**YK – Yoke/Trunnion Mount**

D = 19"  
H (Yoke) = 10"-18"




**ARM – Arm Mount**

L = 28"  
W = 19"  
H = 8"




**PIR & PIRH – Motion/  
Ambient sensor**

L = 20.4"  
W = 19"  
H = 5.65" (no up-light)  
or 6.45" (with up-light)



**BDS – Bird shroud for  
pendant mount**

D = 19"  
H = 8.85"



**BDS – Bird shroud for  
yoke mount**

D = 19"  
H (Yoke) = 10"-18"

## FEATURES & SPECIFICATIONS

### INTENDED USE

The visually comfortable optics, energy savings, and long life of the VCPGX LED Parking Garage luminaire make it an ideal choice for new commercial installations and retrofit parking garage opportunities. It is designed to meet or exceed recommended illuminance criteria when installed as a direct replacement of most HID parking garage luminaires. Its modern dayform and aesthetics also make it appealing for indoor low-bay applications.

### CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. The LED driver is separated from the heat generating light engines and mounted in direct contact with the casting to promote low operating temperatures, higher lumen maintenance and long life. The housing is completely sealed against moisture and environmental contaminants (IP66) and is suitable for hose-down application.

### FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling.

### OPTICS

Light guide technology provides a diffused light source, reducing glare from direct view of the LEDs. The light source is recessed into the luminaire, further reducing the high angle glare from the luminaire. A combination of precision molded micro prismatic acrylic lenses and back reflectors provide five different photometric distributions tailored specifically to parking garage applications. Up-light option comes with a dedicated light engine and custom optic designed to efficiently spread light on to the ceiling, thus reducing the cave effect.

### ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L89/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%, and a minimum 6.0 KV surge rating. When ordering the SPD10KV option, a separate 10kV (5kA) surge protection device is installed within the luminaire which meets a minimum Category C low operation (per ANSI/IEEE C62.41.2). Luminaire is 0-10V dimmable down to 10% or lower.

### INSTALLATION

Standard configuration accepts a rigid or free-swinging ¾" NPT stem for pendant mounting. The surface mount option attaches to a 4x4" recessed or surface mount outlet box using a quick-mount kit (included); kit contains galvanized steel luminaire and outlet box plates and a full pad gasket. Kit has an integral mounting support that allows the luminaire to hinge down for easy electrical connections. Luminaire and plates are secured with set screws. Also, available with a yoke/trunnion mount option with ¾" NPT provision for flexible conduit entry (conduit by others); height can be adjusted from 10-18". Supply leads are 24" in length as standard. Longer supply leads are available as additional options. Design can withstand up to a 3.0 G vibration load rating per ANSI C136.31.

### LISTINGS

CSA certified to U.S. and Canadian standards. IP66 rated for outdoor applications. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

### Government Procurement

**BAA – Buy America(n) Act:** Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations  
**BABA – Build America Buy America:** Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act  
Please refer to [www.acuitybrands.com/resources/buy-american](http://www.acuitybrands.com/resources/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

### Note:

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



COMMERCIAL OUTDOOR

1 Acuity Way • Decatur, Georgia 30035 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2018-2025 Acuity Brands Lighting, Inc. All rights reserved.

VCPGX LED  
Rev. 10/08/25



# WDGE2 LED

## Architectural Wall Sconce

### Precision Refractive Optic



Catalog  
Number


Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications

**Depth (D1):** 7"  
**Depth (D2):** 1.5"  
**Height:** 9"  
**Width:** 11.5"  
**Weight:** 13.5 lbs  
 (without options)

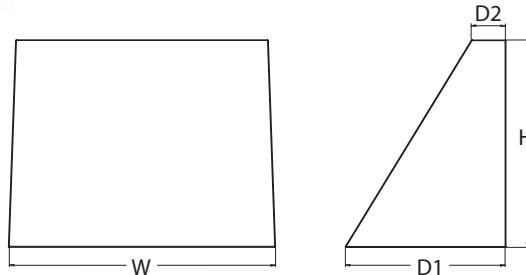

## Introduction

The WDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing a true site-wide solution. Embedded with nLight® AIR wireless controls, the WDGE family provides additional energy savings and code compliance.

WDGE2 with industry leading precision refractive optics provides great uniform distribution and optical control. When combined with multiple integrated emergency battery backup options, including an 18W cold temperature option, the WDGE2 becomes the ideal wall-mounted lighting solution for pedestrian scale applications in any environment.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
 \*See ordering tree for details

## WDGE LED Family Overview

Luminaire	Optics	Standard EM, 0°C	Cold EM, -20°C	Sensor	Approximate Lumens (4000K, 80CRI)						
					P0	P1	P2	P3	P4	P5	P6
WDGE1 LED	Visual Comfort	4W		--	750	1,200	2,000	--	--	--	--
WDGE2 LED	Visual Comfort	10W	18W	Standalone / nLight	--	1,200	2,000	3,000	4,500	6,000	--
WDGE2 LED	Precision Refractive	10W	18W	Standalone / nLight	700	1,200	2,000	3,200	4,200	--	--
WDGE3 LED	Precision Refractive	15W	18W	Standalone / nLight	--	7,500	8,500	10,000	12,000	--	--
WDGE4 LED	Precision Refractive			Standalone / nLight	--	12,000	16,000	18,000	20,000	22,000	25,000

## Ordering Information

**EXAMPLE: WDGE2 LED P3 40K 80CRI T3M MVOLT SRM DDBXD**

Series	Package	Color Temperature		CRI	Distribution	Voltage	Mounting	
WDGE2 LED	P0 <sup>1</sup>	27K	2700K	40K 4000K	70CRI <sup>4</sup>	MVOLT	<b>Shipped included</b>	
	P1 <sup>2</sup>	30K	3000K	50K 5000K	80CRI		<b>SRM</b> Surface mounting bracket	
	P2 <sup>2</sup>	35K	3500K	AMB <sup>3</sup> Amber	LW <sup>3</sup> Limited Wavelength		<b>ICW</b> Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) <sup>6</sup>	
	P3 <sup>2</sup>						<b>AWS</b> 3/8inch Architectural wall spacer <sup>7</sup>	
	P4 <sup>2</sup>						<b>PBBW</b> Surface-mounted back box (top, left, right conduit entry). Use when there is no junction box available <sup>7</sup>	
					T1S Type I Short T2M Type II Medium T3M Type III Medium T4M Type IV Medium TFTM Forward Throw Medium			

Options					Finish	
E10WH	Emergency battery backup, Certified in CA Title 20 MAEDBS (10W, 5°C min)				DDBXD	Dark bronze
E20WC	Emergency battery backup, Certified in CA Title 20 MAEDBS (18W, -20°C min)				DBLXD	Black
PE	Photocell, Button Type <sup>8</sup>				DNAXD	Natural aluminum
DMG	0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>9</sup>				DWHXD	White
BCE	Bottom conduit entry for back box (PBBW). Total of 4 entry points.				DSSXD	Sandstone
CCE	Coastal Construction <sup>7</sup>				DBDXTD	Textured dark bronze
					DBLTXD	Textured black
					DNATXD	Textured natural aluminum
					DWHGXD	Textured white
					DSSTXD	Textured sandstone

### Standalone Sensors/Controls

**PIR** Bi-level (100/35%) motion sensor for 8-15' mounting heights. Intended for use on switched circuits with external dusk to dawn switching.

**PIRH** Bi-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switched circuits with external dusk to dawn switching

**PIR1FC3V** Bi-level (100/35%) motion sensor for 8-15' mounting heights with photocell pre-programmed for dusk to dawn operation.

**PIRH1FC3V** Bi-level (100/35%) motion sensor for 15-30' mounting heights with photocell pre-programmed for dusk to dawn operation.

### Networked Sensors/Controls

**NLTAIR2 PIR** Embedded wireless controls by nLight with Passive Infrared Occ sensor and on/off photocell for 8-15' mounting heights.

**NLTAIR2 PIRH** Embedded wireless controls by nLight with Passive Infrared Occ sensor and on/off photocell for 15-30' mounting heights.

**NLTAIREM2 PIR** Embedded wireless controls by nLight with UL924 listed emergency operation, Passive Infrared Occ sensor and on/off photocell for 8-15' mounting heights

**NLTAIREM2 PIRH** Embedded wireless controls by nLight with UL924 listed emergency operation, Passive Infrared Occ sensor and on/off photocell for 15-30' mounting heights.

See page 4 for out of box functionality



COMMERCIAL OUTDOOR

1 Acuity Way • Decatur, GA 30035 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
 © 2019-2025 Acuity Brands Lighting, Inc. All rights reserved.

WDGE2 LED  
 Rev. 07/07/25



## Accessories

Ordered and shipped separately.

WDGEAWS DDBXD U	WDGE 3/8inch Architectural Wall Spacer (specify finish)
WDGE2PBBW DDBXD U	WDGE2 surface-mounted back box (specify finish)

### NOTES

- 1 P0 option not available with sensors/controls.
- 2 P1-P4 not available with AMB and LW.
- 3 AMB and LW always go together.
- 4 70CRI only available with T3M and T4M.
- 5 347V and 480V not available with E10WH or E20WC.
- 6 Not qualified for DLC. Not available with emergency battery backup or sensors/controls.
- 7 For PBBW and AWS with CCE option, require an RFA.
- 8 PE not available in 480V or with sensors/controls.
- 9 DMG option not available with sensors/controls.

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	27K (2700K, 80 CRI)					30K (3000K, 80 CRI)					40K (4000K, 80 CRI)					50K (5000K, 80 CRI)					Amber (Limited Wavelength)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P0	7W	T1S	636	92	0	0	0	666	97	0	0	0	699	101	0	0	1	691	100	0	0	1	712	47	0	0	1
		T2M	662	96	0	0	0	693	101	0	0	0	728	106	0	0	0	719	104	0	0	0	741	48	0	0	0
		T3M	662	96	0	0	0	693	101	0	0	0	728	106	0	0	0	719	104	0	0	0	741	48	0	0	0
		T4M	648	94	0	0	0	679	98	0	0	0	712	103	0	0	0	704	102	0	0	0	726	47	0	0	0
		TFTM	652	95	0	0	0	683	99	0	0	0	717	104	0	0	0	708	103	0	0	0	730	48	0	0	1
P1	11W	T1S	1,105	99	0	0	1	1,157	104	0	0	1	1,215	109	0	0	1	1,200	107	0	0	1					
		T2M	1,150	103	0	0	1	1,204	108	0	0	1	1,264	113	0	0	1	1,249	112	0	0	1					
		T3M	1,150	103	0	0	1	1,205	108	0	0	1	1,265	113	0	0	1	1,250	112	0	0	1					
		T4M	1,126	101	0	0	1	1,179	106	0	0	1	1,238	111	0	0	1	1,223	110	0	0	1					
		TFTM	1,133	101	0	0	1	1,186	106	0	0	1	1,245	112	0	0	1	1,230	110	0	0	1					
P2	19W	T1S	1,801	95	1	0	1	1,886	99	1	0	1	1,981	104	1	0	1	1,957	103	1	0	1					
		T2M	1,875	99	1	0	1	1,963	103	1	0	1	2,061	109	1	0	1	2,037	107	1	0	1					
		T3M	1,876	99	1	0	1	1,964	103	1	0	1	2,062	109	1	0	1	2,038	107	1	0	1					
		T4M	1,836	97	1	0	1	1,922	101	1	0	1	2,018	106	1	0	1	1,994	105	1	0	1					
		TFTM	1,847	97	1	0	1	1,934	102	1	0	1	2,030	107	1	0	1	2,006	106	1	0	1					
P3	32W	T1S	2,809	87	1	0	1	2,942	92	1	0	1	3,089	96	1	0	1	3,052	95	1	0	1					
		T2M	2,924	91	1	0	1	3,062	95	1	0	1	3,215	100	1	0	1	3,176	99	1	0	1					
		T3M	2,925	91	1	0	1	3,063	95	1	0	1	3,216	100	1	0	1	3,177	99	1	0	1					
		T4M	2,862	89	1	0	1	2,997	93	1	0	1	3,147	98	1	0	1	3,110	97	1	0	1					
		TFTM	2,880	90	1	0	1	3,015	94	1	0	1	3,166	99	1	0	1	3,128	97	1	0	1					
P4	47W	T1S	3,729	80	1	0	1	3,904	84	1	0	1	4,099	88	1	0	1	4,051	87	1	0	1					
		T2M	3,881	83	1	0	1	4,063	87	1	0	1	4,267	91	1	0	1	4,216	90	1	0	1					
		T3M	3,882	83	1	0	1	4,065	87	1	0	1	4,268	91	1	0	1	4,217	90	1	0	1					
		T4M	3,799	81	1	0	1	3,978	85	1	0	1	4,177	90	1	0	1	4,127	88	1	0	1					
		TFTM	3,822	82	1	0	1	4,002	86	1	0	1	4,202	90	1	0	1	4,152	89	1	0	1					

Performance Package	System Watts	Dist. Type	27K (2700K, 70 CRI)					30K (3000K, 70 CRI)					40K (4000K, 70 CRI)					50K (5000K, 70 CRI)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P0	7W	T3M	737	107	0	0	0	763	111	0	0	0	822	119	0	0	0	832	121	0	0	1
		T4M	721	105	0	0	0	746	108	0	0	0	804	117	0	0	1	814	118	0	0	1
P1	11W	T3M	1,280	115	0	0	1	1,325	119	0	0	1	1,427	128	1	0	1	1,445	129	1	0	1
		T4M	1,253	112	0	0	1	1,297	116	0	0	1	1,397	125	0	0	1	1,415	127	0	0	1
P2	19W	T3M	2,087	110	1	0	1	2,160	114	1	0	1	2,327	123	1	0	1	2,357	124	1	0	1
		T4M	2,042	108	1	0	1	2,114	111	1	0	1	2,278	120	1	0	1	2,306	121	1	0	1
P3	32W	T3M	3,254	101	1	0	1	3,369	105	1	0	1	3,629	113	1	0	1	3,675	114	1	0	1
		T4M	3,185	99	1	0	1	3,297	103	1	0	1	3,552	111	1	0	1	3,597	112	1	0	1
P4	47W	T3M	4,319	93	1	0	1	4,471	96	1	0	1	4,817	103	1	0	2	4,878	105	1	0	2
		T4M	4,227	91	1	0	1	4,376	94	1	0	2	4,714	101	1	0	2	4,774	102	1	0	2

Electrical Load

Performance Package	System Watts	Current (A)					
		120Vac	208Vac	240Vac	277Vac	347Vac	480Vac
P0	7.0	0.061	0.042	0.04	0.039	--	--
	9.0	--	--	--	--	0.031	0.021
P1	11.0	0.100	0.064	0.059	0.054	--	--
	14.1	--	--	--	--	0.046	0.031
P2	19.0	0.168	0.106	0.095	0.083	--	--
	22.8	--	--	--	--	0.067	0.050
P3	32.0	0.284	0.163	0.144	0.131	--	--
	37.1	--	--	--	--	0.107	0.079
P4	47.0	0.412	0.234	0.207	0.185	--	--
	53.5	--	--	--	--	0.153	0.112

Lumen Output in Emergency Mode  
(4000K, 80 CRI, T3M)

Option	Lumens
E10WH	1,358
E20WC	2,230

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.03
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).


To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.96	>0.93	>0.87


Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

LEGEND



MH = 10ft  
Grid = 10ft x 10ft

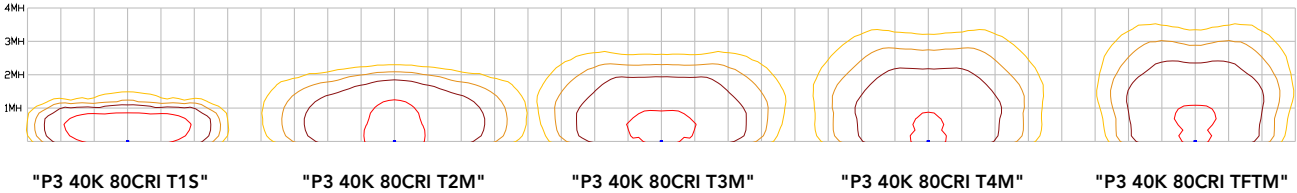

Emergency Egress Options

Emergency Battery Backup

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90minutes.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9

## Control / Sensor Options

### Motion/Ambient Sensor (PIR, PIRH)



Motion/Ambient sensor (Sensor Switch MSOD) is integrated into the the luminaire. The sensor provides both Motion and Daylight based dimming of the luminaire. For motion detection, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment. The integrated photocell enables additional energy savings during daytime periods when there is sufficient daylight. Optimize sensor coverage by either selecting PIR or PIRH option. PIR option comes with a sensor lens that is optimized to provide maximum coverage for mounting heights between 8-15ft, while PIRH is optimized for 15-40ft mounting height.

### Networked Control (NLTAIR2)

nLight® AIR is a wireless lighting controls platform that allows for seamless integration of both indoor and outdoor luminaires. Five-tier security architecture, 900 MHz wireless communication and app (CLAIRITY™ Pro) based configurability combined together make nLight® AIR a secure, reliable and easy to use platform.


#### PIR

##### HIGH VIEW

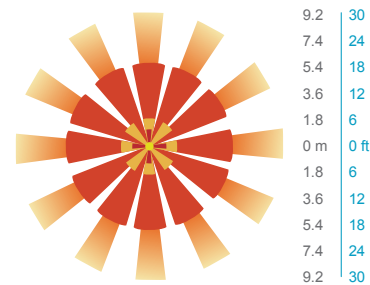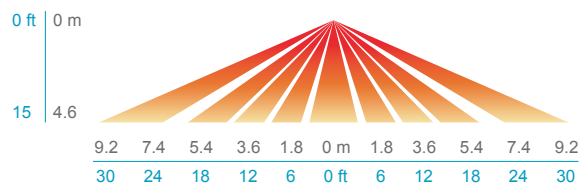


#### PIRH

##### SIDE VIEW

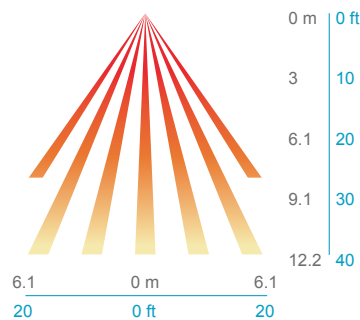

##### TOP VIEW

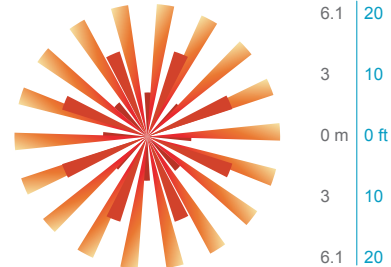

Option	Dim Level	High Level (when triggered)	Photocell Operation	Motion Time Delay	Ramp-down Time	Ramp-up Time
PIR or PIRH	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
PIR1FC3V, PIRH1FC3V	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 1fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
NLTAIR2 PIR, NLTAIR2 PIRH, NLTAIREM2 PIR, NLTAIREM2 PIRH (out of box)	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	7.5 min	5 min	Motion - 3 sec Photocell - 45 sec

### UL 924 Response – nLight AIR Devices with EM Option

- NLTAIREM2 devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, NLTAIREM2 devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- The non-emergency devices, NLTAIR2 PIR and NLTAIR2 PIRH, with version 3.4 or later firmware can be used for normal power sensing.





### Motion/Ambient Sensor

D = 7"

H = 9" (Standalone controls)

11" (nLight AIR controls, 2" antenna will be pointing down behind the sensor)

W = 11.5"



### PBBW – Surface-Mounted Back Box

Use when there is no junction box available.

D = 1.75"

H = 9"

W = 11.5"



### AWS – 3/8inch Architectural Wall Spacer

D = 0.38"

H = 4.4"

W = 7.5"

## FEATURES & SPECIFICATIONS

### INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

### CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP66 rating for the luminaire.

### FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

### OPTICS

Individually formed acrylic lenses are engineered for superior application efficiency which maximizes the light in the areas where it is most needed. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2). Fixture ships standard with 0-10v dimmable driver.

### INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 2700K and 3000K color temperature only and SRM mounting only.

### GOVERNMENT PROCUREMENT

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

FEATURES & SPECIFICATIONS

**INTENDED USE** — These specifications are for USA standards only. Square Straight Steel is a general purpose light pole for up to 39-foot mounting heights. This pole provides a robust yet cost effective option for mounting area lights and floodlights.

**CONSTRUCTION** —

**Pole Shaft:** The pole shaft is of uniform dimension and wall thickness and is made of a weldable-grade, hot-rolled, commercial-quality steel tubing with a minimum yield of 55 KSI (11-gauge, 0.120"), or 50 KSI (7-gauge, 0.179"). Shaft is one-piece with a full-length longitudinal high-frequency electric resistance weld. Uniformly square in cross-section with flat sides, small corner radii and excellent torsional qualities. Available shaft widths are 4", 5" and 6".

**Pole Top:** Options include 4" tenon top, drilled for side mount fixture, tenon with drilling (includes extra handhole) and open top. Side drilled and open top poles include a removable top cap.

**Handhole:** A reinforced handhole with grounding provision is provided at 18" from the base on side A. Positioning the handhole lower may not be possible and requires engineering review; consult Tech Support-Outdoor for further information. Every handhole includes a cover and cover attachment hardware. The handhole has a nominal dimension of 2.5" x 5".

**Base Cover:** A durable ABS plastic two-piece full base cover, finished to match the pole, is provided with each pole assembly. Additional base cover options are available upon request.

**Anchor Base/Bolts:** Anchor base is fabricated from steel that meets ASTM A36 standards and can be altered to match existing foundations; consult factory for modifications. Anchor bolts are manufactured to ASTM F1554 Standards grade 55, (55 KSI minimum yield strength and tensile strength of 75-95 KSI). Top threaded portion (nominal 12") is hot-dipped galvanized per ASTM A-153.

**HARDWARE** — All structural fasteners are high-strength galvanized carbon steel. All non-structural fasteners are galvanized or zinc-plated carbon steel or stainless steel.

**FINISH** — Extra durable painted finish is coated with TGIC (Triglycidyl Isocyanurate) Polyester powder that meets 5A and 5B classifications of ASTM D3359. Powder-coat finishes include Dark Bronze, White, Black, and Natural Aluminum colors. Architectural Colors and Special Finishes are available by quote and include, but are not limited to Paint over Hot-dipped Galvanized, RAL Colors, Custom Colors and Extended Warranty Finishes.

**GOVERNMENT PROCUREMENT** —

**BAA** — Buy America(n) Act: Product qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product also qualifies as manufactured in the United States under DOT Buy America regulations.

**BABA** — Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**INSTALLATION** — **Do not** erect poles without having fixtures installed. Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use Lithonia Lighting factory templates. If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage. Lithonia Lighting is not responsible for the foundation design.

**WARRANTY** — 1-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**NOTE:** Actual performance may differ as a result of end-user environment and application. Specifications subject to change without notice.

Catalog Number
Notes
Type



Anchor Base Poles

SSS

SQUARE STRAIGHT STEEL



SSS Square Straight Steel Poles

ORDERING INFORMATION      Lead times will vary depending on options selected. Consult with your sales representative.      Example: SSS 20 5C DM28AS DDBXD

SSS					
Series	Nominal fixture mounting height	Nominal shaft base size/wall thickness <sup>1</sup>	Mounting <sup>2</sup>	Options	Finish
SSS	10'-39' (for 1/2 ft increments, add -6 to the pole height. <b>Ex:</b> 20-6 equals 20ft 6in.)  (See technical information table for complete ordering information.)	4C 4" 11g (0.120") 4G 4" 7g (0.179") 5C 5" 11g (0.120") 5G 5" 7g (0.179") 6G 6" 7g (0.179")  (See technical information table for complete ordering information.)	<u>Tenon mounting</u> PT Open top (includes top cap) T20 2-3/8" O.D. (2" NPS) T25 2-7/8" O.D. (2-1/2" NPS) T30 3-1/2" O.D. (3" NPS) T35 4" O.D. (3-1/2" NPS) <u>DSX/RSX/OMERO™ Drill mounting<sup>3</sup></u> DM19AS 1 at 90° DM28AS 2 at 180° DM29AS 2 at 90° DM39AS 3 at 90° DM49AS 4 at 90° <u>RAD drill mounting<sup>3</sup></u> DM19RAD 1 at 90° DM28RAD 2 at 180° DM29RAD 2 at 90° DM39RAD 3 at 90° DM49RAD 4 at 90° <u>ESX Drill mounting<sup>3</sup></u> DM19ESX 1 at 90° DM28ESX 2 at 180° DM29ESX 2 at 90° DM39ESX 3 at 90° DM49ESX 4 at 90° <u>Arm drill mounting</u> To be added as series + drill orientations <b>EX:</b> SMAC19 for SMAC arm drilling 1 at 90°	<u>Shipped installed</u> VD Vibration damper <sup>4</sup> JHxy J-Hook for cable strain relief <sup>5</sup> HAXy Horizontal arm bracket (1 fixture) <sup>5,6</sup> FDLxy Festoon outlet less electrical <sup>5,7</sup> FDLGFCLxy Festoon with GFCI outlet and in-use cover <sup>5,8</sup> CPL12/xy 1/2" coupling <sup>5</sup> CPL34/xy 3/4" coupling <sup>5</sup> CPL1/xy 1" coupling <sup>5</sup> NPL12/xy 1/2" threaded nipple <sup>5</sup> NPL34/xy 3/4" threaded nipple <sup>5</sup> NPL1/xy 1" threaded nipple <sup>5</sup> EHHxy Extra handhole <sup>5,9</sup> STLTMP Steel anchor bolt template (standard is paper) STLHHC Steel handhole cover (standard is plastic, finish is smooth) <sup>10</sup> FBCSTL2PC 2 Piece steel base cover (standard is plastic) <sup>10</sup> IC Interior coating <sup>11</sup> L/AB Less anchor bolts (Include when anchor bolts are not needed) TP Tamper resistant handhole cover fasteners NEC NEC 410.30 compliant gasketed handhole (Not UL Labeled) UL UL listed with label (Includes NEC compliant cover) BAA Buy America(n) Act Compliant <sup>12</sup> VM/original order# Match pole to prior order or project <sup>13</sup>	<u>Super durable paint colors</u> DDBXD Dark bronze <b>DBLXD</b> <b>Black</b> DNAXD Natural aluminum DWHXD White DSSXD Sandstone DGCXD Charcoal gray DTGXD Tennis green DBRXD Bright red DSBXD Steel blue DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white <u>Other finishes</u> GALV Galvanized finish <u>Architectural colors and special finishes<sup>14</sup></u> [PAINT] GALV Paint over galvanizing VP30 3 year warranty extension VP53 5 year warranty extension RAL#### Use designated Lithonia Lighting nomenclature in <a href="#">brochure</a>  Custom color Nomenclature assigned through Customer Care "Custom Color Process"

<b>Accessories:</b> Order as separate catalog number.	
PL DT20	Plugs for ESX drillings
PL DT8	Plugs for DMxxAS drillings
FVD xxFT	Field installed vibration damper (snake style)

- NOTES:**
1. Wall thickness will be signified with a "C" (11 Gauge) or a "G" (7-Gauge) in nomenclature. "C" - 0.120" | "G" - 0.179".

2. PT open top poles include top cap. When ordering tenon mounting and drill mounting for the same pole, specify as drilling option/tenon option. The combination includes a required extra handhole.  
Example: DM28/T20.

3. Refer to the fixture spec sheet for the correct drilling template pattern and orientation compatibility.

4. On 4" and 5" poles, VD cannot be installed if provisions (EHH, FDL, NPL, CPL) are located higher than 2/3 of the pole's total height.  
Example: Pole height is 25ft, A provision cannot be placed above 16ft.

5. Specify location and orientation when ordering option.  
**For "x":** Specify the height above the base of pole in feet or feet and inches; separate feet and inches with a "-".  
Example: 5ft = 5 and 20ft 3in = 20-3  
**For "y":** Specify orientation from handhole (A,B,C,D) Refer to the Handhole Orientation diagram below.  
Example: 1/2" coupling at 5' 8", orientation C = CPL12/5-8C

6. Horizontal arm is 18" x 2-3/8" O.D. tenon standard, with radius curve providing 12" rise and 2-3/8" O.D. If ordering two horizontal arm at the same height, specify with HAXxy.  
Example: HA20BD.

7. FDL does not come with GFCI outlet or handhole cover. These must be supplied by contractor or electrician.

8. Festoon option that comes with GFCI and in-use cover. GFCI and in-use cover ship separately from pole.

9. Combination of tenon-top and drill mount includes extra handhole. EHH includes cover.

10. Plastic hand hole cover and base covers come standard with all poles. Items ship separately. Additional parts can be ordered as replacements.

11. N/A with GALV.

12. Use when mill certifications are required.

13. Must add original order number. Not for replacement parts or post sales issues, contact tech support or post sales teams. VM is used to ensure poles match in appearance exactly from order to order, on a single project site. A common use case would be a multi-phase project with multiple orders. Example: VM/010-36784

14. Must be quoted through AQD. Finishes do not require RFA. RAL colors available are shown in "Architectural Colors brochure". Lead times may be extended up to 2 weeks due to paint procurement.
- 
- POLE-SSS
- OUTDOOR: One Lithonia Way Conyers, GA 30012 Phone: 800-705-SERV (7378) TechSupport-Lighting@Acuitybrands.com www.lithonia.com ©1994-2025 Acuity Brands Lighting, Inc. All rights reserved. Rev. 02/27/25



# SSS Square Straight Steel Poles

TECHNICAL INFORMATION — EPA (ft²) with 1.3 gust											
Catalog Number	Nominal Shaft Length (ft.)*	Pole Shaft Size (Base in. x Top in. x ft.)	Wall thick (in.)	Gauge	EPA (ft²) with 1.3 gust						Approximate ship weight (lbs.)
					80 MPH	Max. weight	90 MPH	Max. weight	100 MPH	Max. weight	
SSS 10 4C	10	4.0 x 10.0	0.120"	11	30.6	765	23.8	595	18.9	473	75
SSS 12 4C	12	4.0 x 12.0	0.120"	11	24.4	610	18.8	470	14.8	370	90
SSS 14 4C	14	4.0 x 14.0	0.120"	11	19.9	498	15.1	378	11.7	293	100
SSS 16 4C	16	4.0 x 16.0	0.120"	11	15.9	398	11.8	295	8.9	223	115
SSS 18 4C	18	4.0 x 18.0	0.120"	11	12.6	315	9.2	230	6.7	168	125
SSS 20 4C	20	4.0 x 20.0	0.120"	11	9.6	240	6.7	167	4.5	150	140
SSS 20 4G	20	4.0 x 20.0	0.179"	7	14	350	11	275	8	200	198
SSS 20 5C	20	5.0 x 20.0	0.120"	11	17.7	443	12.7	343	9.4	235	185
SSS 20 5G	20	5.0 x 20.0	0.179"	7	28.1	703	21.4	535	16.2	405	265
SSS 25 4C	25	4.0 x 25.0	0.120"	11	4.8	150	2.6	100	1	50	170
SSS 25 4G	25	4.0 x 25.0	0.179"	7	10.8	270	7.7	188	5.4	135	245
SSS 25 5C	25	5.0 x 25.0	0.120"	11	9.8	245	6.3	157	3.7	150	225
SSS 25 5G	25	5.0 x 25.0	0.179"	7	18.5	463	13.3	333	9.5	238	360
SSS 30 4G	30	4.0 x 30.0	0.179"	7	6.7	168	4.4	110	2.6	65	295
SSS 30 5C	30	5.0 x 30.0	0.120"	11	4.7	150	2	50	--	--	265
SSS 30 5G	30	5.0 x 30.0	0.179"	7	10.7	267	6.7	167	3.9	100	380
SSS 30 6G	30	6.0 x 30.0	0.179"	7	19	475	13.2	330	9	225	520
SSS 35 5G	35	5.0 x 35.0	0.179"	7	5.9	150	2.5	100	--	--	440
SSS 35 6G	35	6.0 x 35.0	0.179"	7	12.4	310	7.6	190	4.2	105	540
SSS 39 6G	39	6.0 x 39.0	0.179"	7	7.2	180	3	75	--	--	605

NOTE: EPA values are based ASCE 7-93 wind map.  
\* For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.



TECHNICAL INFORMATION — EPA (ft²) WITH 3-SECOND GUST PER AASHTO 2013																	
Series	Mounting Height (ft.)*	Shaft Base Size	90 MPH	Max. weight	100 MPH	Max. weight	110 MPH	Max. weight	120 MPH	Max. weight	130 MPH	Max. weight	140 MPH	Max. weight	150 MPH	Max. weight	Approximate ship weight (lbs.)
SSS	10	4C	20	500	16	400	13	325	10.5	263	8.5	213	7	175	6	150	75
SSS	12	4C	16	400	13	325	10	250	8	200	6.5	163	5	125	4	100	90
SSS	14	4C	13.5	338	10	250	7.5	188	6	150	4.5	113	3.5	88	2.5	63	100
SSS	16	4C	10.5	263	7.5	188	5.5	138	4	100	3	75	1.5	38	1	25	115
SSS	18	4C	8	200	5.5	138	4	100	2.5	63	1.5	38	0.5	13	-	-	125
SSS	18	4G	13	325	9.5	238	7	175	5	125	3.5	88	2.5	63	1.5	38	185
SSS	18	5C	13	325	9.5	238	6.5	163	4.5	113	3	75	1.5	38	.5	13	170
SSS	20	4C	6	150	4	100	2.5	63	1	25	-	-	-	-	-	-	140
SSS	20	4G	10.5	263	7.5	188	5.5	138	3.5	88	2	50	1	25			205
SSS	20	5C	10	250	7	175	4.5	113	2.5	63	1	25	-	-	-	-	185
SSS	20	5G	20	500	15	375	11.5	288	8.5	213	6	150	4.5	113	3	75	265
SSS	25	4C	2	50	0.5	13	-	-	-	-	-	-	-	-	-	-	170
SSS	25	4G	5.5	138	3	75	1.5	38	-	-	-	-	-	-	-	-	245
SSS	25	5C	4.5	113	2	50	-	-	-	-	-	-	-	-	-	-	225
SSS	25	5G	12	300	8.5	213	5.5	138	3	75	1.5	38	-	-	-	-	360
SSS	25	6G	19	475	13.5	338	9	225	5.5	138	3	75	1	25			445
SSS	30	4G	1.5	38	-	-	-	-	-	-	-	-	-	-	-	-	291
SSS	30	5C	-	-	-	-	-	-	-	-	-	-	-	-	-	-	265
SSS	30	5G	6.5	163	3.5	88	1	25	-	-	-	-	-	-	-	-	380
SSS	30	6G	11	275	6	150	2.5	63	-	-	-	-	-	-	-	-	520
SSS	35	5G	2	50	-	-	-	-	-	-	-	-	-	-	-	-	440
SSS	35	6G	4	100	-	-	-	-	-	-	-	-	-	-	-	-	540
SSS	39	6G	-	-	-	-	-	-	-	-	-	-	-	-	-	-	605

NOTE: AASHTO 2013 design criteria is the most common EPA and uses wind map ASCE7-05. Please review the project Spec document to determine the correct design criteria for the poles on your jobsite.  
\*For 1/2 ft increments, add -6 to the pole height. Ex: 20-6 equals 20ft 6in.

# SSS Square Straight Steel Poles

ANCHORAGE AND TEMPLATE INFORMATION								
Shaft base size	Bolt circle A	Bolt projection B	Base square C	Base plate thickness	Template description *	Anchor bolt description	Bolt size (in.) D x L x C	Anchor bolt/Template Combo
4"C	8" – 9"	3.25" - 3.75"	8" - 8.25"	0.75"	ABTEMPLATE PJ50004	AB18-0	3/4 x 18 x 3	ABSSS-4C
4"G	8" – 9"	3.38" - 3.75"	8" - 8.25"	0.875"	ABTEMPLATE PJ50004	AB30-0	3/4 x 30 x 3	ABSSS-4G
5"	10" – 12"	3.5" - 4"	11"	1"	ABTEMPLATE PJ50010	AB36-0	1 x 36 x 4	ABSSS-5
6"	11" – 13"	4" - 4.50"	12.5"	1"	ABTEMPLATE PJ50011	AB36-0	1 x 36 x 4	N/A

\* Paper template standard. Add STL to end of description for the steel template.

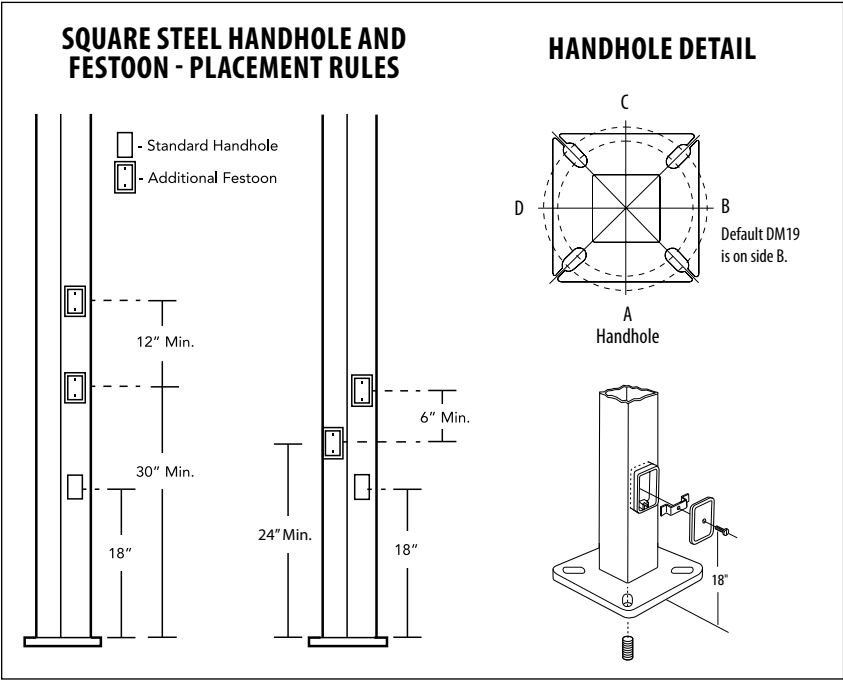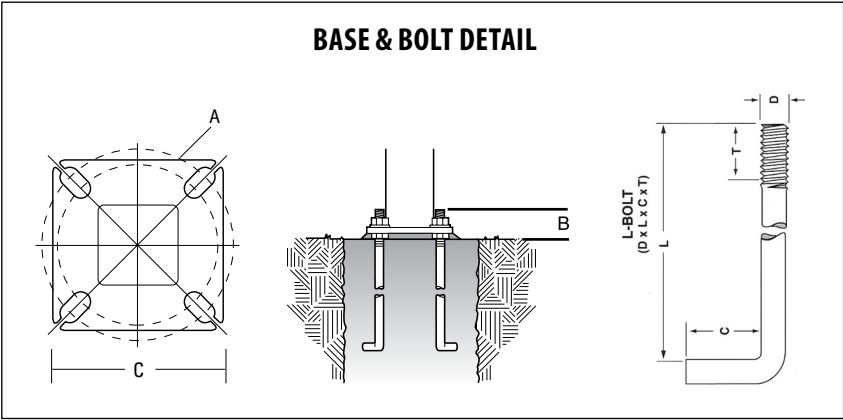

**IMPORTANT INSTALLATION NOTES:**

- **Do not** erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia Lighting will not accept claim for incorrect anchorage placement due to failure to use Lithonia Lighting factory templates.
- If poles are stored outside, all protective wrapping must be removed immediately upon delivery to prevent finish damage.
- Lithonia Lighting is not responsible for the foundation design.
- Bolt circles have +/- 1/2" tolerance.

**CAUTION:** These specifications are intended for general purposes only. Lithonia Lighting reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.






# D-Series Size 0 LED Area Luminaire



d<sup>s</sup>series

## Specifications

EPA:	0.44 ft <sup>2</sup> (0.04 m <sup>2</sup> )
Length:	26.18" (66.5 cm)
Width:	14.06" (35.7 cm)
Height H1:	2.26" (5.7 cm)
Height H2:	7.46" (18.9 cm)
Weight:	23 lbs (10.4 kg)

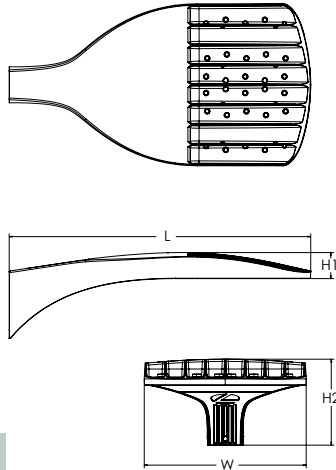

**ds** Design Select options indicated by this color background.

Catalog  
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE:** DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED											
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution		Voltage	Mounting				
DSX0 LED	Forward optics	(this section 70CRI only)		AFR	Automotive front row	T5M	Type V medium	MVOLT	(120V-277V) <sup>4</sup>	Shipped included	
	P1 P5	30K 3000K	70CRI	T1S	Type I short	T5LG	Type V low glare	HVOLT	(347V-480V) <sup>5,6</sup>	SPA	Square pole mounting (#8 drilling, 3.5" min. SQ pole)
	P2 P6	40K 4000K	70CRI	T2M	Type II medium	T5W	Type V wide	XVOLT	(277V-480V) <sup>7,8</sup>	RPA	Round pole mounting (#8 drilling, 3" min. RND pole)
	P3 P7	50K 5000K	70CRI	T3M	Type III medium	BLC3	Type III backlight control <sup>3</sup>	120 <sup>16, 24</sup>	208 <sup>16, 24</sup>	SPA5	Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup>
	P4			T3LG	Type III low glare <sup>3</sup>	BLC4	Type IV backlight control <sup>3</sup>	240 <sup>16, 24</sup>	277 <sup>16, 24</sup>	RPAS	Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup>
	Rotated optics	27K 2700K	80CRI	T4M	Type IV medium	LCCO	Left corner cutoff <sup>3</sup>	347 <sup>16, 24</sup>	480 <sup>16, 24</sup>	SPA8N	Square narrow pole mounting (#8 drilling, 3" min. SQ pole)
	P10 <sup>1</sup> P12 <sup>1</sup>	30K 3000K	80CRI	T4LG	Type IV low glare <sup>3</sup>	RCCO	Right corner cutoff <sup>3</sup>			WBA	Wall bracket <sup>10</sup>
	P11 <sup>1</sup> P13 <sup>1</sup>	35K 3500K	80CRI	TFTM	Forward throw medium					MA	Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)
		40K 4000K	80CRI								
		50K 5000K	80CRI								

Control options	Other options	Finish (required)
<b>Shipped installed</b>	<b>Shipped installed</b>	<b>DDBXD</b> Dark Bronze
<b>NLTAIR2 PIRHN</b> nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc <sup>11, 12, 18, 19</sup>	<b>HS</b> Houseside shield (black finish standard) <sup>20</sup>	<b>DBLXD</b> Black
<b>PIR</b> High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc <sup>13, 18, 19</sup>	<b>L90</b> Left rotated optics <sup>1</sup>	<b>DNAXD</b> Natural Aluminum
<b>PER</b> NEMA twist-lock receptacle only (controls ordered separate) <sup>14</sup>	<b>R90</b> Right rotated optics <sup>1</sup>	<b>DWHXD</b> White
<b>PERS</b> Five-pin receptacle only (controls ordered separate) <sup>14, 19</sup>	<b>CCE</b> Coastal Construction <sup>21</sup>	<b>DDBTXD</b> Textured dark bronze
<b>PER7</b> Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>	<b>HA</b> 50°C ambient operation <sup>22</sup>	<b>DBLBXD</b> Textured black
<b>FAO</b> Field adjustable output <sup>15, 19</sup>	<b>BAA</b> Buy America(n) Act and/or Build America Buy America Qualified	<b>DNATXD</b> Textured natural aluminum
<b>BL30</b> Bi-level switched dimming, 30% <sup>16, 19</sup>	<b>SF</b> Single fuse (120, 277, 347V) <sup>24</sup>	<b>DWHGXD</b> Textured white
<b>BL50</b> Bi-level switched dimming, 50% <sup>16, 19</sup>	<b>DF</b> Double fuse (208, 240, 480V) <sup>24</sup>	
<b>DMG</b> 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	<b>Shipped separately</b>	
	<b>EGSR</b> External Glare Shield (reversible, field install required, matches housing finish)	
	<b>BSDB</b> Bird Spikes (field install required)	



1 Acuity Way • Decatur, Georgia 30035 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2025 Acuity Brands Lighting, Inc. All rights reserved.

DSX0-LED  
Rev. 08/28/25  
Page 1 of 9



## Ordering Information

### Accessories


Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>23</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>23</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>23</sup>
DSHORT SBK	Shorting cap <sup>23</sup>
DSX0HS P#	House-side shield (enter package number P1-7, P10-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSX0EGSR (FINISH)	External glare shield (specify finish)
DSX0BDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in packages P1, P2, or P10. XVOLT not available with fusing (SF or DF). XVOLT also not available in packages P3, P4, P5, P7, P11, P13 when combined with NLTAIR2 PIRHN or PIR.
- SPAS and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1 using MVOLT.
- PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using HVOLT. PIR not available with P1 using MVOLT.
- PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, or DMG.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG. BL30 or BL50 must specify 120 or 277V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50 and FAO.
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option BS and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P6, P7, P12 and P13.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories




External Glare Shield (EGSR)




House Side Shield (HS)

## Drilling

### HANDHOLE ORIENTATION (from top of pole)

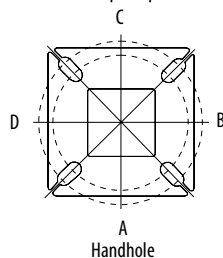

Handhole

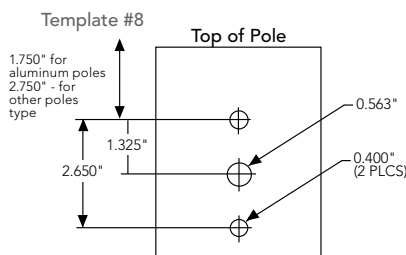

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
Minimum Acceptable Outside Pole Dimension							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPAS	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX0 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX0 with SPA	0.44	0.88	0.96	1.18	---	1.16
DSX0 with SPAS, SPA8N	0.51	1.02	1.06	1.26	---	1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93
















# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [homepage](#).

Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').

## LEGEND

- 0.1 fc
- 0.5 fc
- 1.0 fc

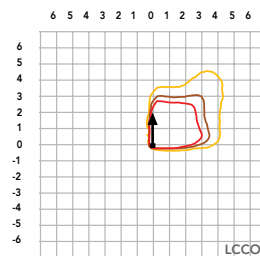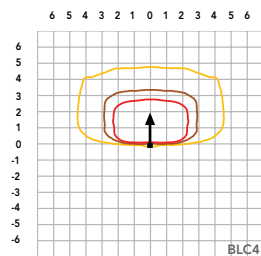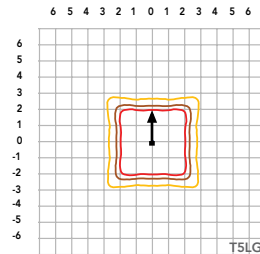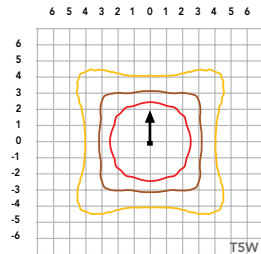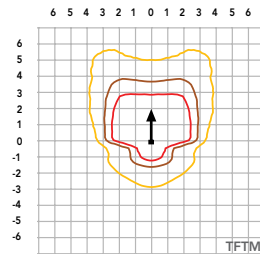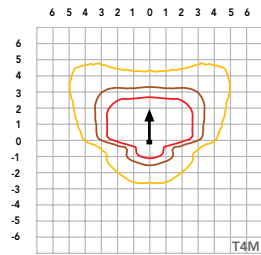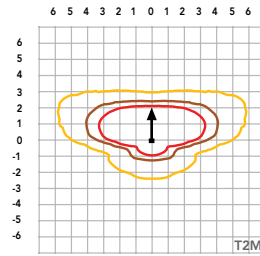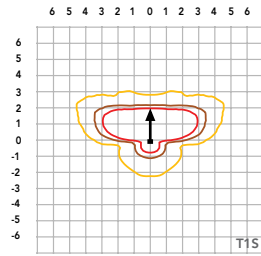

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°F</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor override when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

### Electrical Load

					Current (A)					
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
Rotated Optics (Requires L90 or R90)	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

#### Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P1	33W	20	530	T1S	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149
				T4LG	4,244	1	0	1	128	4,423	1	0	1	133	4,509	1	0	1	136
				TFTM	4,698	1	0	2	141	4,896	1	0	2	147	4,992	1	0	2	150
				T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108
				LCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157
P2	45W	20	700	T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
				T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138
				T3M	5,930	1	0	3	131	6,180	1	0	3	137	6,301	1	0	3	140
				T3LG	5,297	1	0	1	117	5,521	1	0	1	122	5,628	1	0	1	125
				T4M	6,018	1	0	3	133	6,272	1	0	3	139	6,395	1	0	3	142
				T4LG	5,474	1	0	1	121	5,705	1	0	1	126	5,816	1	0	1	129
				TFTM	6,060	1	0	3	134	6,316	1	0	3	140	6,439	1	0	3	143
				T5M	6,192	3	0	1	137	6,453	3	0	2	143	6,579	3	0	2	146
				T5W	6,293	3	0	2	139	6,558	3	0	2	145	6,686	3	0	2	148
				T5LG	6,210	2	0	1	138	6,472	3	0	1	143	6,598	3	0	1	146
				BLC3	4,313	0	0	2	96	4,495	0	0	2	100	4,583	0	0	2	102
				BLC4	4,455	0	0	2	99	4,643	0	0	2	103	4,733	0	0	2	105
				RCCO	4,352	0	0	2	96	4,536	0	0	2	100	4,624	0	0	2	102
				LCCO	4,352	0	0	2	96	4,536	0	0	2	100	4,624	0	0	2	102
				AFR	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149
P3	69W	20	1050	T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
				T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130
				T3LG	7,539	1	0	2	109	7,857	1	0	2	114	8,010	1	0	2	116
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133
				T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136
				BLC3	6,139	0	0	2	89	6,398	0	0	2	93	6,522	0	0	2	95
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139
P4	93W	20	1400	T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130
				T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121
				T3M	10,680	2	0	3	115	11,130	2	0	3	120	11,347	2	0	3	122
				T3LG	9,540	1	0	2	103	9,942	1	0	2	107	10,136	1	0	2	109
				T4M	10,839	2	0	3	117	11,296	2	0	3	121	11,516	2	0	4	124
				T4LG	9,858	1	0	2	106	10,274	1	0	2	110	10,474	1	0	2	113
				TFTM	10,914	2	0	3	117	11,374	2	0	3	122	11,596	2	0	3	125
				T5M	11,152	4	0	2	120	11,622	4	0	2	125	11,849	4	0	2	127
				T5W	11,332	4	0	3	122	11,811	4	0	3	127	12,041	4	0	3	129
				T5LG	11,184	3	0	1	120	11,656	3	0	2	125	11,883	3	0	2	128
				BLC3	7,768	0	0	2	83	8,096	0	0	2	87	8,254	0	0	2	89
				BLC4	8,023	0	0	3	86	8,362	0	0	3	90	8,524	0	0	3	92
				RCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90
				LCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90
				AFR	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

#### Forward Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P5	90W	40	700	T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140
				T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				LCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
P6	137W	40	1050	T1S	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
				T2M	16,253	3	0	4	119	16,939	3	0	4	124	17,269	3	0	4	126
				T3M	16,442	2	0	4	120	17,135	3	0	4	125	17,469	3	0	4	128
				T3LG	14,687	2	0	2	107	15,306	2	0	2	112	15,605	2	0	2	114
				T4M	16,687	2	0	4	122	17,391	3	0	5	127	17,730	3	0	5	129
				T4LG	15,177	2	0	2	111	15,817	2	0	2	115	16,125	2	0	2	118
				TFTM	16,802	2	0	4	123	17,511	2	0	4	128	17,852	2	0	5	130
				T5M	17,168	4	0	2	125	17,893	5	0	3	131	18,241	5	0	3	133
				T5W	17,447	5	0	3	127	18,183	5	0	3	133	18,537	5	0	3	135
				T5LG	17,218	4	0	2	126	17,944	4	0	2	131	18,294	4	0	2	134
				BLC3	11,959	0	0	3	87	12,464	0	0	3	91	12,707	0	0	3	93
				BLC4	12,352	0	0	4	90	12,873	0	0	4	94	13,124	0	0	4	96
				RCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				LCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				AFR	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
P7	171W	40	1300	T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
				T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124
				T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129



## Performance Data


### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.



#### Rotated Optics

Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P10	51W	30	530	T1S	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
				TFTM	7,086	3	0	3	139	7,385	3	0	3	145	7,529	3	0	3	148
				T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154
P11	68W	30	700	T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
				T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
				T3M	8,768	3	0	3	129	9,138	3	0	3	134	9,316	3	0	3	137
				T3LG	7,833	3	0	3	115	8,164	3	0	3	120	8,323	3	0	3	122
				T4M	8,899	3	0	3	131	9,274	3	0	3	136	9,455	3	0	3	139
				T4LG	8,093	3	0	3	119	8,435	3	0	3	124	8,599	3	0	3	126
				TFTM	8,962	3	0	3	132	9,340	3	0	3	137	9,522	3	0	3	140
				T5M	9,156	4	0	2	135	9,542	4	0	2	140	9,728	4	0	2	143
				T5W	9,304	4	0	2	137	9,696	4	0	2	143	9,885	4	0	2	145
				T5LG	9,182	3	0	1	135	9,569	3	0	1	141	9,756	3	0	1	143
				BLC3	6,378	3	0	3	94	6,647	3	0	3	98	6,777	3	0	3	100
				BLC4	6,587	3	0	3	97	6,865	3	0	3	101	6,999	3	0	3	103
				RCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101
				LCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101
				AFR	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
P12	103W	30	1050	T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
				T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
P13	129W	30	1300	T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
				T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
				T3M	14,714	4	0	4	114	15,335	4	0	4	119	15,634	4	0	4	121
				T3LG	13,145	3	0	3	102	13,700	3	0	3	106	13,967	3	0	3	108
				T4M	14,933	4	0	4	116	15,563	4	0	4	121	15,867	4	0	4	123
				T4LG	13,582	3	0	3	105	14,155	3	0	3	110	14,431	3	0	3	112
				TFTM	15,039	4	0	4	117	15,673	4	0	4	122	15,979	4	0	4	124
				T5M	15,364	4	0	2	119	16,013	4	0	2	124	16,325	4	0	2	127
				T5W	15,613	5	0	3	121	16,272	5	0	3	126	16,589	5	0	3	129
				T5LG	15,409	3	0	2	120	16,059	3	0	2	125	16,372	4	0	2	127
				BLC3	10,703	4	0	4	83	11,155	4	0	4	87	11,372	4	0	4	88
				BLC4	11,054	4	0	4	86	11,520	4	0	4	89	11,745	4	0	4	91
				RCCO	10,800	1	0	2	84	11,256	1	0	2	87	11,475	1	0	3	89
				LCCO	10,800	1	0	2	84	11,255	1	0	2	87	11,475	1	0	3	89
				AFR	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130



## Dimensions

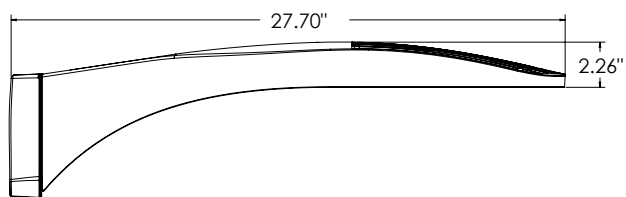


**DSX0 with RPA, RPA5, SPA5, SPA8N mount**  
Weight: 25 lbs

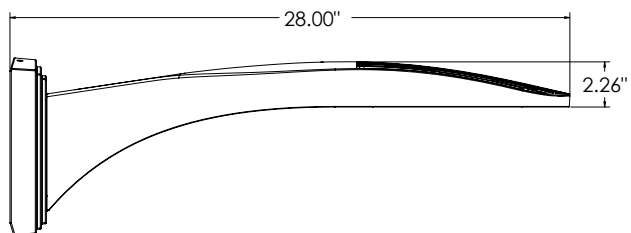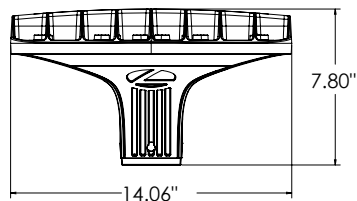


**DSX0 with WBA mount**  
Weight: 27 lb

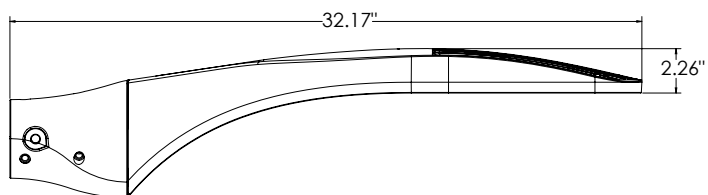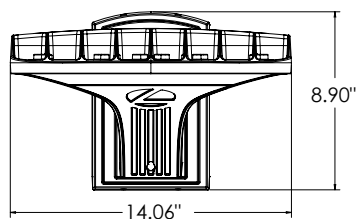


**DSX0 with MA mount**  
Weight: 28 lbs

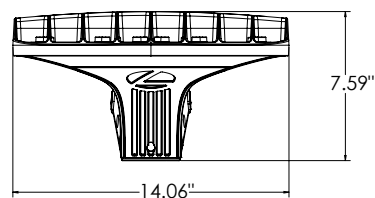


**SPA (STANDARD ARM)**

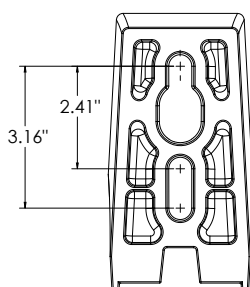


**RPA**

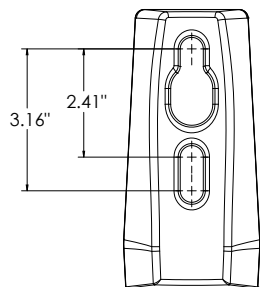


**SPA5**

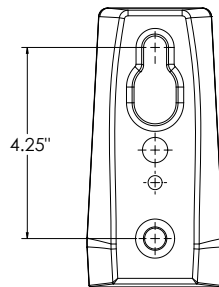

**RPA5**



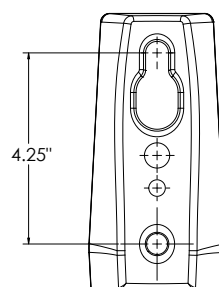


**SPA8N**

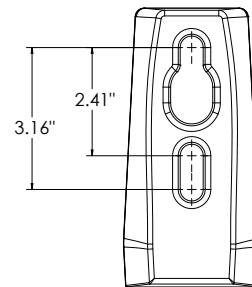

## nLight Sensor Coverage Pattern

### NLTAIR2 PIRHN

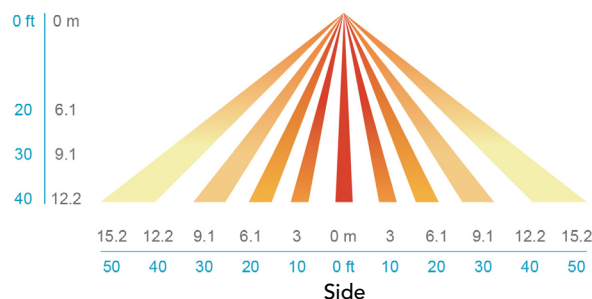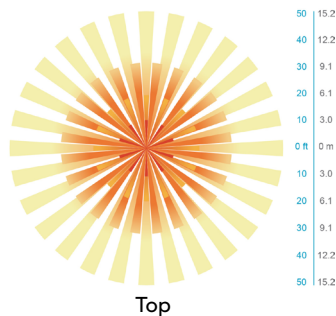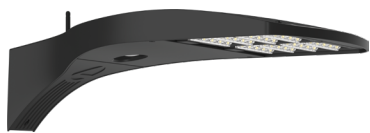

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft²) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





# Juno SlimForm™ LED with Selectable CCT

5" and 7" Round Downlight for JBox Installation

## JSF Series



## Dimensions

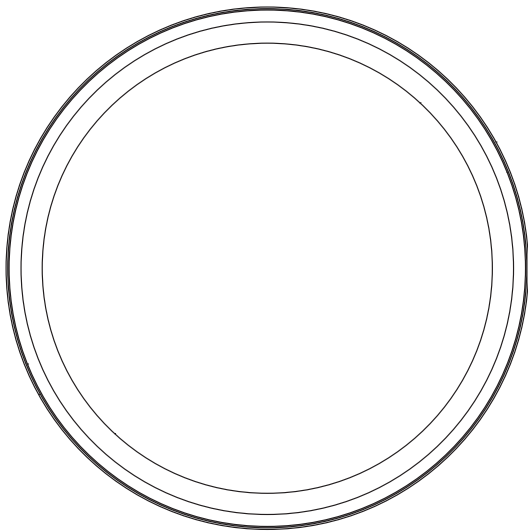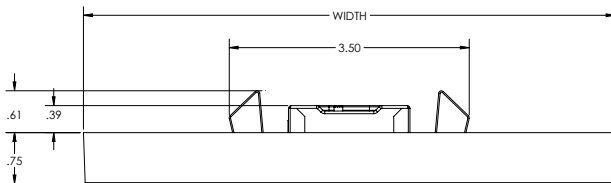

Project:

Fixture Type:

Location:

Contact/Phone:

## Product Features

Sleek, ultra-low profile energy efficient LED surface mount downlights available in 5" and 7" sizes. Optional finish trims available for custom, designer look similar to standard recessed downlights. Provides general illumination in residential and commercial applications including multi-family and hospitality. Ideal for use in corridors, living spaces, closets, hallways, pantries, stairways, outdoor covered areas and much more.

With the newly added selectable CCT switch, the JSF gives the ultimate in flexibility for both the distributor as well as the end user.

## Applications

- Suitable for wet locations (indoor covered ceilings): perfect for closets, showers, bathrooms, outdoor soffits, and covered ceiling applications.
- Residential and Light Commercial applications including multi-family and hospitality
- Ideal for use in corridors, foyers, living spaces, closets, hallways, pantries, stairways and much more
- Installs directly into industry standard junction boxes
- Suitable for use within closet storage spaces when installed per NEC requirements. *Junction box sizes vary - Verify compatibility with fixture prior to installation*

## Performance

Delivered Lumens	JSF 5IN = 791L - 854L JSF 7IN = 1182L - 1324L
Led Color Temperature	Switchable White (2700K, 3000K, 3500K, 4000K, 5000K) Default set at 3000K
CRI	90+
Voltage	Dedicated 120V and MVOLT (120V-277V)
Dimming	Phase Dimming down to 10%. 0-10V and phase dimming available.

## Specifications

	Width	Depth
JSF 5IN	5.25 (13.34)	0.75 (1.91)
JSF 7IN	7.77 (19.74)	0.75 (1.91)

All dimensions are in Inches (centimeters unless otherwise indicated).



# Juno SlimForm™ LED with Selectable CCT

5" and 7" Round Downlight for JBox Installation



JSF

## ORDERING INFORMATION

### SlimForm LED Downlight

Example: JSF 5IN 07LM SWW5 90CRI 120 FRPC WH

Series	Size/Lumens	Color Temperature	CRI	Voltage/Driver	Finish <sup>1</sup>
<b>JSF</b> SlimForm Surface Mount Downlight - Round	<b>5IN 07LM</b> 5", 791-854 Lumens <b>7IN 10LM</b> 7", 1182-1324 Lumens	<b>SWW5</b> Switchable White (2700K, 3000K, 3500K, 4000K, 5000K)	<b>90CRI</b> 90+ CRI	<b>120 FRPC</b> Dedicated 120V, Forward Reverse Phase Dimming <b>MVOLT ZT</b> Universal Voltage 120V-277V, 0-10V Dimming	<b>WH</b> White <b>WH LGL<sup>2</sup></b> White Low Glare Lens <b>BL LGL<sup>2</sup></b> Black Low Glare Lens <b>BZ LGL<sup>2</sup></b> Bronze Low Glare Lens <b>SN LGL<sup>2</sup></b> Satin Nickel Low Glare Lens

#### Note:

- Trim Accessories must be ordered separately with white finish only. Not available with LGL option.
- Trim finishes with LGL option ship complete. See Accessories if ordering without LGL.

## ACCESSORIES<sup>1</sup>

**TRIM** — Optional, field installable finish trim rings available to change the exterior finish of fixture.

Example: JSFTRIM 5IN BZ

Series	Size	Finish
JSFTRIM SlimForm Accessory- Trim	5IN 5 inches	WH White
	7IN 7 inches	BL Black
		BZ Bronze
		SN Satin Nickel

#### Note:

\* SN not available for 5IN



BLACK



BRONZE



SATIN NICKEL

## REMOTE EMERGENCY IOTA INVERTERS FOR FIELD INSTALLATION

Inverter Part Number	Description
<a href="#">IIS 25 I</a>	Emergency Inverter, 25W output
<a href="#">IIS 50 I</a>	Emergency Inverter, 50W output
<a href="#">IIS 35 HE</a>	Emergency Inverter, 35W output, High Efficiency (meets CA T20 efficiency requirement)

Must be ordered on a separate line. For Emergency Battery related questions contact us at [techsupport@iotaengineering.com](mailto:techsupport@iotaengineering.com)





# Juno SlimForm™ LED with Selectable CCT

5" and 7" Round Downlight for JBox Installation



JSF

## Specifications

### Construction

Shallow, less than 1", solid ring with white finish • Non conductive construction allows for light shower applications • Optional, field installable finish trims available for 5" and 7" versions to change the exterior finish of fixture

### Optics

Light guide technology combined with diffusing lens conceals the LEDs from direct view and provides uniform lens luminance.

### LED Light Engine

LEDs mounted directly to heatsink designed to provide superior thermal management and ensure long life • Selectable CCT with steps at 27K, 30K, 35K, 40K, 50K • LEDs binned for 4-step MacAdam ellipse color consistency • 90 CRI minimum.

### LED Driver

Choice of dedicated 120 volt (120) driver or universal voltage (MVOLT) driver that accommodates input voltages from 120-277 volts AC at 50/60Hz • Power factor > 0.9 at 120V input • 120 volt driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • Universal voltage driver is dimmable with the use of most 0-10V wall box dimmers • External driver is only available on 5" and 7" models • For a list of compatible dimmers, see [JUNOSLIMFORM-DIM](#).

### Installation

#### Junction Box Mounting

Fixture provided with leads for direct wire connection in j-box • Installs directly to industry standard junction boxes • Compatible junction boxes include 4" metal standard and IC1JB junction box housing (3 1/2" junction box screw-hole spacing required for installation) • Minimum 1 3/4" depth and minimum 3 1/2" width of junction box required for installation for 5" and 7" fixtures • Quick mount bracket provides fast installation of fully assembled fixture to junction box • Suitable for ceiling mount • Suitable for use within closet storage spaces when installed per NEC requirements. Junction box sizes vary - Verify compatibility with fixture prior to installation

### Life

Rated for 50,000 hours at >70% lumen maintenance.

### Labels

Certified to the high efficacy requirements of California T24 JA8-2019 • CSA listed for US and Canada • Suitable for wet locations (covered ceilings).

### Testing

All reports are based on published industry procedures; field performance may differ from laboratory performance.

### Warranty

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

## ELECTRICAL DATA

### Dedicated 120V Only Driver Option (120 FRPC)

	5IN 07LM	7IN 10LM
Input Power	9.2W (+/-5)	12.3W (+/-5)
Input Current	0.08A	0.10A
Frequency	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)
Minimum Starting Temp	-20°C	-20°C

### Universal Voltage MVOLT ZT

	5IN 07LM		7IN 10LM	
	120V	277V	120V	277V
Input Power	9.2W (+/-5)	9.2W (+/-5)	12.3W (+/-5)	12.3W (+/-5)
Input Current	0.08A	0.03A	0.10A	0.04A
Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
EMI/RFI	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)	FCC Title 47, Part 15 Class B (consumer)
Minimum Starting Temp	-20°C	-20°C	-20°C	-20°C

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C.



# Juno SlimForm™ LED with Selectable CCT


5" and 7" Round Downlight for JBox Installation



JSF


## PHOTOMETRICS

JSF 5IN 07LM SWW5 - 27K Input Watts: 9.2, Delivered Lumens: 791, LPW: 86.0, S/MH: 1.25, Test No: ISF 231051P1

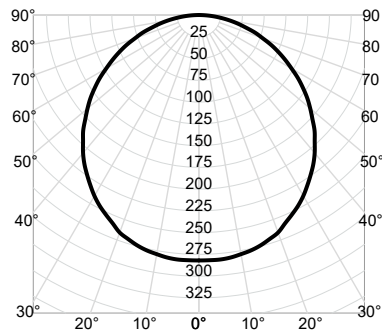


CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
						pf	80%			70%			50%			Mounting Height	Initial FC Center Beam	Beam Diameter		
	0°	Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%				Average Luminance		
0°	282	0° - 30°	220	28%	0	119	119	119	116	116	116	111	111	111	6.0	7.8	17.9	0°	31,550	
5°	282	0° - 40°	358	45%	1	104	100	96	102	98	94	98	94	91	8.0	4.4	23.8	45°	29,745	
15°	274	0° - 60°	625	79%	2	91	84	78	89	82	77	85	80	75	10.0	2.8	29.8	55°	28,478	
25°	253	0° - 90°	791	100%	3	80	71	65	78	70	64	75	69	63	12.0	2.0	35.8	65°	26,737	
35°	224	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	1.4	41.7	75°	24,207	
45°	188	0° - 180°	791	100%	5	63	54	47	62	54	47	60	52	47	Beam Angle: 112.3° Field Angle: 163.9°			85°	21,822	
55°	146				6	57	48	41	56	47	41	54	47	41						
65°	101				7	52	43	37	51	42	36	49	42	36						
75°	56				8	47	39	33	46	38	33	45	38	32						
85°	17				9	43	35	29	43	35	29	42	34	29						
90°	0				10	40	32	27	39	32	27	38	31	27						

JSF 5IN 07LM SWW5 - 30K Input Watts: 9.1, Delivered Lumens: 814, LPW: 89.5, S/MH: 1.25, Test No: ISF 231051P2

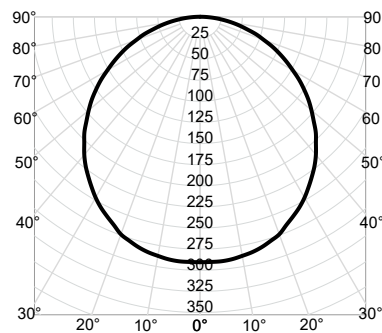

CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)				
						pf	80%				70%				50%				Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance	
0°		Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%									
0°	290	0° - 30°	227	28%	0	119	119	119	116	116	116	111	111	111				6.0	8.1	17.9	0°	32,496	
5°	290	0° - 40°	369	45%	1	104	100	96	102	98	94	98	94	91				8.0	4.5	23.8	45°	30,638	
15°	282	0° - 60°	643	79%	2	91	84	78	89	82	77	85	80	75				10.0	2.9	29.8	55°	29,332	
25°	261	0° - 90°	814	100%	3	80	71	65	78	70	64	75	69	63				12.0	2.0	35.8	65°	27,539	
35°	231	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54				14.0	1.5	41.7	75°	24,933	
45°	194	0° - 180°	814	100%	5	63	54	47	62	54	47	60	52	47							85°	22,477	
55°	150				6	57	48	41	56	47	41	54	47	41				Beam Angle: 112.3° Field Angle: 163.9°					
65°	104				7	52	43	37	51	42	36	49	42	36									
75°	58				8	47	39	33	46	38	33	45	38	32									
85°	18				9	43	35	29	43	35	29	42	34	29									
90°	0				10	40	32	27	39	32	27	38	31	27									

JSF 5IN 07LM SWW5 - 35K Input Watts: 8.9, Delivered Lumens: 846, LPW: 95.1, S/MH: 1.25, Test No: ISF 231051P3

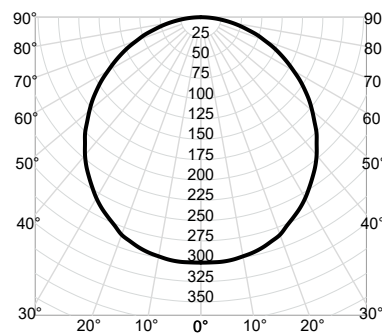

CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
						pf					20%						Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance
						pc	80%		70%		50%									
	0°	Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%						
0°	302	0° - 30°	236	28%	0	119	119	119	116	116	111	111	111	111	6.0	8.4	17.9	0° 33,758		
5°	302	0° - 40°	383	45%	1	104	100	96	102	98	94	98	94	91	8.0	4.7	23.8	45° 31,827		
15°	293	0° - 60°	668	79%	2	91	84	78	89	82	77	85	80	75	10.0	3.0	29.8	55° 30,471		
25°	271	0° - 90°	846	100%	3	80	71	65	78	70	64	75	69	63	12.0	2.1	35.8	65° 28,609		
35°	240	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	1.5	41.7	75° 25,901		
45°	201	0° - 180°	846	100%	5	63	54	47	62	54	47	60	52	47	Beam Angle: 112.3° Field Angle: 163.9°			85° 23,350		
55°	156				6	57	48	41	56	47	41	54	47	41						
65°	108				7	52	43	37	51	42	36	49	42	36						
75°	60				8	47	39	33	46	38	33	45	38	32						
85°	18				9	43	35	29	43	35	29	42	34	29						
90°	0				10	40	32	27	39	32	27	38	31	27						



# Juno SlimForm™ LED with Selectable CCT


5" and 7" Round Downlight for JBox Installation



JSF


## PHOTOMETRICS

**JSF 5IN 07LM SWW5 - 40K** Input Watts: 9.1, Delivered Lumens: 854, LPW: 93.8, S/MH: 1.25, Test No: ISF 231051P4

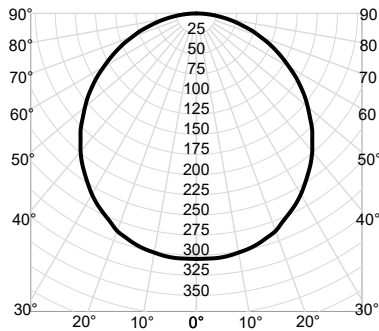


CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
						pf					20%				Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance		
						pc	80%				70%									
	0°	Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%						
0°	305	0° - 30°	238	28%	0	119	119	119	116	116	116	111	111	111	6.0	8.5	17.9	0°	34,074	
5°	305	0° - 40°	386	45%	1	104	100	96	102	98	94	98	94	91	8.0	4.8	23.8	45°	32,125	
15°	296	0° - 60°	675	79%	2	91	84	78	89	82	77	85	80	75	10.0	3.0	29.8	55°	30,756	
25°	273	0° - 90°	854	100%	3	80	71	65	78	70	64	75	69	63	12.0	2.1	35.8	65°	28,876	
35°	242	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	1.6	41.7	75°	26,143	
45°	203	0° - 180°	854	100%	5	63	54	47	62	54	47	60	52	47	Beam Angle: 112.3° Field Angle: 163.9°			85°	23,568	
55°	158				6	57	48	41	56	47	41	54	47	41						
65°	109				7	52	43	37	51	42	36	49	42	36						
75°	60				8	47	39	33	46	38	33	45	38	32						
85°	18				9	43	35	29	43	35	29	42	34	29						
90°	0				10	40	32	27	39	32	27	38	31	27						

**JSF 5IN 07LM SWW5 - 50K** Input Watts: 9.2, Delivered Lumens: 854, LPW: 92.8, S/MH: 1.25, Test No: ISF 231051P5

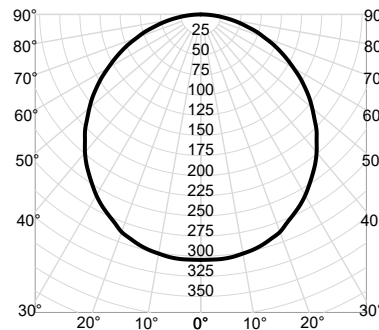

CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
						pf					20%						Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance
						pc	80%				70%		50%							
	0°	Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%						
0°	305	0° - 30°	238	28%	0	119	119	119	116	116	116	111	111	111	6.0	8.5	17.9	0° 34,074		
5°	305	0° - 40°	386	45%	1	104	100	96	102	98	94	98	94	91	8.0	4.8	23.8	45° 32,125		
15°	296	0° - 60°	675	79%	2	91	84	78	89	82	77	85	80	75	10.0	3.0	29.8	55° 30,756		
25°	273	0° - 90°	854	100%	3	80	71	65	78	70	64	75	69	63	12.0	2.1	35.8	65° 28,876		
35°	242	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	1.6	41.7	75° 26,143		
45°	203	0° - 180°	854	100%	5	63	54	47	62	54	47	60	52	47	Beam Angle: 112.3° Field Angle: 163.9°			85° 23,568		
55°	158				6	57	48	41	56	47	41	54	47	41						
65°	109				7	52	43	37	51	42	36	49	42	36						
75°	60				8	47	39	33	46	38	33	45	38	32						
85°	18				9	43	35	29	43	35	29	42	34	29						
90°	0				10	40	32	27	39	32	27	38	31	27						

**JSF 7IN 10LM SWW5 - 27K** Input Watts: 12.0, Delivered Lumens: 1182, LPW: 98.5, S/MH: 1.24, Test No: ISF 23588P1

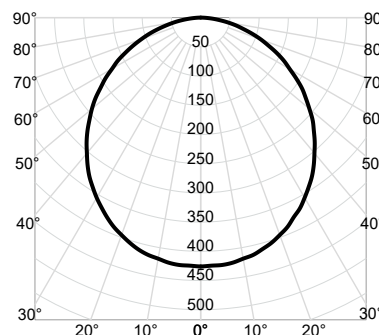

CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)			
						pf					20%						Mounting Height	Initial FC	Beam Diameter			
						pc	80%				70%		50%					Center Beam		Average Luminance		
0°		Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%								
0°	426	0° - 30°	331	28%	0	119	119	119	116	116	116	111	111	111	6.0	11.8	16.9	0°	18,617			
5°	425	0° - 40°	538	45%	1	104	100	96	102	98	94	97	94	91	8.0	6.7	22.5	45°	16,934			
15°	410	0° - 60°	937	79%	2	91	84	78	89	83	77	85	80	75	10.0	4.3	28.2	55°	16,153			
25°	377	0° - 90°	1,182	100%	3	80	72	65	78	71	64	75	69	63	12.0	3.0	33.8	65°	14,891			
35°	332	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	2.2	39.5	75°	12,833			
45°	274	0° - 180°	1,182	100%	5	63	54	48	62	54	47	60	52	47				85°	10,029			
55°	212				6	57	48	42	56	47	41	54	47	41	Beam Angle: 109.3° Field Angle: 161.5°							
65°	144				7	52	43	37	51	42	37	49	42	36								
75°	76				8	47	39	33	46	38	33	45	38	32								
85°	20				9	43	35	29	43	35	29	42	34	29								
90°	0				10	40	32	27	39	32	27	38	31	27								



# Juno SlimForm™ LED with Selectable CCT


5" and 7" Round Downlight for JBox Installation



JSF


## PHOTOMETRICS

**JSF 7IN 10LM SWW5 - 30K** Input Watts: 12.3, Delivered Lumens: 1218, LPW: 99.0, S/MH: 1.24, Test No: ISF 23588P2

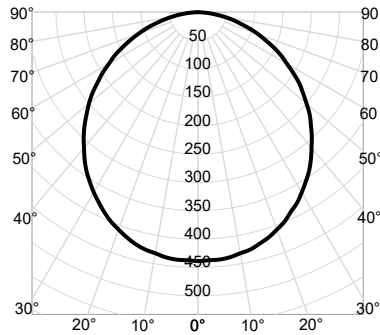


CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
						pf					20%						Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance
0°		Zone	Lumens	% Fixture	pc	50%	30%	10%	50%	30%	10%	50%	30%	10%						
0°	439	0° - 30°	341	28%	0	119	119	119	116	116	116	111	111	111	6.0	12.2	16.9	0°	19,176	
5°	438	0° - 40°	554	45%	1	104	100	96	102	98	94	97	94	91	8.0	6.9	22.5	45°	17,442	
15°	422	0° - 60°	966	79%	2	91	84	78	89	83	77	85	80	75	10.0	4.4	28.2	55°	16,637	
25°	388	0° - 90°	1,218	100%	3	80	72	65	78	71	64	75	69	63	12.0	3.0	33.8	65°	15,338	
35°	342	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	2.2	39.5	75°	13,218	
45°	282	0° - 180°	1,218	100%	5	63	54	48	62	54	47	60	52	47	Beam Angle: 109.3° Field Angle: 161.5°				85°	10,329
55°	218				6	57	48	42	56	47	41	54	47	41						
65°	148				7	52	43	37	51	42	37	49	42	36						
75°	78				8	47	39	33	46	38	33	45	38	32						
85°	21				9	43	35	29	43	35	29	42	34	29						
90°	0				10	40	32	27	39	32	27	38	31	27						

**JSF 7IN 10LM SWW5 - 35K** Input Watts: 12.1, Delivered Lumens: 1265, LPW: 104.5, S/MH: 1.24, Test No: ISF 23588P3

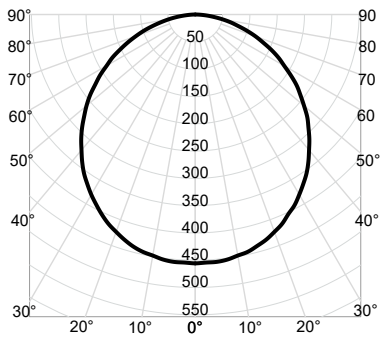

CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)		
						pf	80%			20%			50%				Mounting Height	Initial FC Center Beam	Beam Diameter	Average Luminance	
0°		Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%							
0°	456	0° - 30°	354	28%	0	119	119	119	116	116	116	111	111	111	6.0	12.7	16.9	0°	19,920		
5°	455	0° - 40°	575	45%	1	104	100	96	102	98	94	97	94	91	8.0	7.1	22.5	45°	18,120		
15°	439	0° - 60°	1,003	79%	2	91	84	78	89	83	77	85	80	75	10.0	4.6	28.2	55°	17,284		
25°	403	0° - 90°	1,265	100%	3	80	72	65	78	71	64	75	69	63	12.0	3.2	33.8	65°	15,933		
35°	355	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	2.3	39.5	75°	13,731		
45°	293	0° - 180°	1,265	100%	5	63	54	48	62	54	47	60	52	47	Beam Angle: 109.3° Field Angle: 161.5°					85°	10,731
55°	227				6	57	48	42	56	47	41	54	47	41							
65°	154				7	52	43	37	51	42	37	49	42	36							
75°	81				8	47	39	33	46	38	33	45	38	32							
85°	21				9	43	35	29	43	35	29	42	34	29							
90°	0				10	40	32	27	39	32	27	38	31	27							

**JSF 7IN 10LM SWW5 - 40K** Input Watts: 12.2, Delivered Lumens: 1301, LPW: 106.6, S/MH: 1.24, Test No: ISF 23588P4

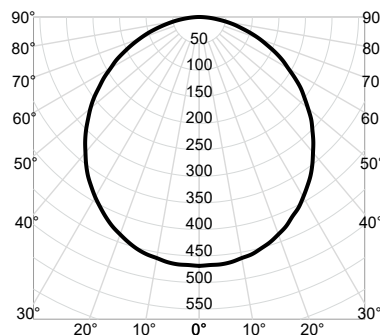

CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)	
						pf					20%						Mounting Height	Initial FC	Beam Diameter	
						pc	80%					70%						Center Beam		Average Luminance
0°		Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%						
0°	469	0° - 30°	364	28%	0	119	119	119	116	116	116	111	111	111	6.0	13.0	16.9	0°	20,479	
5°	468	0° - 40°	592	45%	1	104	100	96	102	98	94	97	94	91	8.0	7.3	22.5	45°	18,628	
15°	451	0° - 60°	1,031	79%	2	91	84	78	89	83	77	85	80	75	10.0	4.7	28.2	55°	17,768	
25°	415	0° - 90°	1,300	100%	3	80	72	65	78	71	64	75	69	63	12.0	3.3	33.8	65°	16,380	
35°	365	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54	14.0	2.4	39.5	75°	14,116	
45°	301	0° - 180°	1,301	100%	5	63	54	48	62	54	47	60	52	47	Beam Angle: 109.3° Field Angle: 161.5°			85°	11,031	
55°	233				6	57	48	42	56	47	41	54	47	41						
65°	158				7	52	43	37	51	42	37	49	42	36						
75°	84				8	47	39	33	46	38	33	45	38	32						
85°	22				9	43	35	29	43	35	29	42	34	29						
90°	0				10	40	32	27	39	32	27	38	31	27						



# Juno SlimForm™ LED with Selectable CCT


5" and 7" Round Downlight for JBox Installation



JSF

## PHOTOMETRICS

JSF 7IN 10LM SSW5 - 50K Input Watts: 12.3, Delivered Lumens: 1324, LPW: 107.6, S/MH: 1.24, Test No: ISF 23588P5

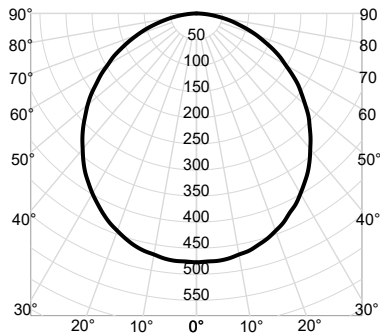

CP Summary		Zonal Lumen Summary				Coefficients of Utilization										Cone of Light			Luminance (cd/sq.m)		
						pf						20%					Mounting Height	Initial FC Center Beam	Beam Diameter		
						pc	80%		70%			50%			Average Luminance						
	0°	Zone	Lumens	% Fixture	pw	50%	30%	10%	50%	30%	10%	50%	30%	10%							
0°	477	0° - 30°	370	28%	0	119	119	119	116	116	116	111	111	111		6.0	13.3	16.9	0°	20,851	
5°	476	0° - 40°	602	45%	1	104	100	96	102	98	94	97	94	91		8.0	7.5	22.5	45°	18,967	
15°	459	0° - 60°	1,050	79%	2	91	84	78	89	83	77	85	80	75		10.0	4.8	28.2	55°	18,091	
25°	422	0° - 90°	1,324	100%	3	80	72	65	78	71	64	75	69	63		12.0	3.3	33.8	65°	16,678	
35°	372	90° - 180°	0	0%	4	71	62	55	69	61	55	67	60	54		14.0	2.4	39.5	75°	14,373	
45°	307	0° - 180°	1,324	100%	5	63	54	48	62	54	47	60	52	47					85°	11,232	
55°	237				6	57	48	42	56	47	41	54	47	41							
65°	161				7	52	43	37	51	42	37	49	42	36							
75°	85				8	47	39	33	46	38	33	45	38	32							
85°	22				9	43	35	29	43	35	29	42	34	29							
90°	0				10	40	32	27	39	32	27	38	31	27							

Beam Angle: 109.3°  
Field Angle: 161.5°





# WDGE1 LED

## Architectural Wall Sconce



Catalog  
Number


Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Specifications

**Depth (D1):** 5.5"  
**Depth (D2):** 1.5"  
**Height:** 8"  
**Width:** 9"  
**Weight:** 9 lbs  
 (without options)

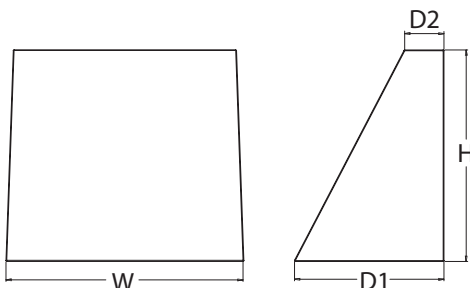

### Introduction

The WDGE1 LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing true site-wide solution.

WDGE1 delivers up to 2,000 lumens with a soft, non-pixelated light source, creating a visually comfortable environment. The compact size of WDGE1, with its integrated emergency battery backup option, makes it an ideal over-the-door wall-mounted lighting solution.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
 \*See ordering tree for details

### WDGE LED Family Overview

Luminaire	Optics	Standard EM, 0°C	Cold EM, -20°C	Sensor	Approximate Lumens (4000K, 80CRI)						
					P0	P1	P2	P3	P4	P5	P6
WDGE1 LED	Visual Comfort	4W		--	750	1,200	2,000	--	--	--	--
WDGE2 LED	Visual Comfort	10W	18W	Standalone / nLight	--	1,200	2,000	3,000	4,500	6,000	--
WDGE2 LED	Precision Refractive	10W	18W	Standalone / nLight	700	1,200	2,000	3,200	4,200	--	--
WDGE3 LED	Precision Refractive	15W	18W	Standalone / nLight	6,000	7,500	8,500	10,000	12,000	--	--
WDGE4 LED	Precision Refractive			Standalone / nLight	--	12,000	16,000	18,000	20,000	22,000	25,000

### Ordering Information

**EXAMPLE:** WDGE1 LED P2 40K 80CRI VF MVOLT SRM PE DDBXD

Series	Package	Color Temperature	CRI	Distribution	Voltage	Mounting
WDGE1 LED	P0 P1 P2	27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K <sup>1</sup> 5000K	80CRI 90CRI	VF Visual comfort forward throw VW Visual comfort wide	MVOLT 347 <sup>2</sup>	<b>Shipped included</b> SRM Surface mounting bracket ICW Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) <sup>3</sup> <b>Shipped separately</b> AWS 3/8inch Architectural wall spacer <sup>4</sup> PBBW Surface-mounted back box (top, left, right conduit entry) Use when there is no junction box available. <sup>4</sup>

#### Options

**E4WH** Emergency battery backup, Certified in CA Title 20 MAEDBS (4W, 0°C min)<sup>5</sup>  
**PE** Photocell, Button Type<sup>6</sup>  
**DS** Dual switching (comes with 2 drivers and 2 light engines; see page 3 for details)<sup>7</sup>  
**DMG** 0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately)  
**BCE** Bottom conduit entry for back box (PBBW). Total of 4 entry points.  
**DSLE** Dual Switching (1 Driver, 2 Light Engines)  
**CCE** Coastal Construction<sup>4</sup>

#### Finish

**DDBXD** Dark bronze  
**DBLXD** Black  
**DNAXD** Natural aluminum  
**DWHXD** White  
**DSSXD** Sandstone  
**DDBTXD** Textured dark bronze  
**DBLTXD** Textured black  
**DNATXD** Textured natural aluminum  
**DWHGXD** Textured white  
**DSSTXD** Textured sandstone



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
 © 2019-2025 Acuity Brands Lighting, Inc. All rights reserved.

WDGE1 LED  
 Rev. 04/02/25

## Accessories

Ordered and shipped separately.

WDGEAWS DDBXD	WDGE 3/8inch Architectural Wall Spacer (specify finish)
WDGE1PBBW DDBXD U	WDGE1 surface-mounted back box (specify finish)

## NOTES

- 1 50K not available in 90CRI.
- 2 347V not available with E4WH, DS, DSLE or PE.
- 3 Not qualified for DLC. Not available with E4WH.
- 4 For PBBW and AWS with CCE option, require an RFA.
- 5 E4WH not available with PE or DS.
- 6 PE not available with DS.
- 7 DS is not available with P0.

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	Dist. Type	27K (2700K, 80 CRI)					30K (3000K, 80 CRI)					35K (3500K, 80 CRI)					40K (4000K, 80 CRI)					50K (5000K, 80 CRI)				
			Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P0	7W	VF	693	99	0	0	0	718	103	0	0	0	739	106	0	0	0	759	108	0	0	0	764	109	0	0	0
		VW	694	99	0	0	0	720	103	0	0	0	740	106	0	0	0	760	109	0	0	0	766	109	0	0	0
P1	10W	VF	1,120	112	0	0	0	1,161	116	0	0	0	1,194	119	0	0	0	1,227	123	0	0	0	1,235	123	0	0	0
		VW	1,122	112	0	0	0	1,163	116	0	0	0	1,196	120	0	0	0	1,229	123	0	0	0	1,237	124	0	0	0
P2	15W	VF	1,806	120	1	0	0	1,872	125	1	0	0	1,925	128	1	0	0	1,978	132	1	0	0	1,992	133	1	0	0
		VW	1,809	120	1	0	0	1,876	125	1	0	0	1,929	128	1	0	0	1,982	132	1	0	0	1,996	133	1	0	0

### Electrical Load

Performance Package	System Watts	Current (A)				
		120V	208V	240V	277V	347V
P0	7W	0.060	0.035	0.030	0.026	--
	9W	--	--	--	--	0.026
P1	10W	0.082	0.049	0.043	0.038	--
	13W	--	--	--	--	0.046
P2	15W	0.132	0.081	0.072	0.064	--
	18W	--	--	--	--	0.056

### Lumen Multiplier for 90CRI

CCT	Multiplier
27K	0.845
30K	0.867
35K	0.845
40K	0.885
50K	0.898

### Lumen Output in Emergency Mode (4000K, 80 CRI)

Option	Dist. Type	Lumens
E4WH	VF	646
	VW	647

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.03
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.96	>0.95	>0.91



COMMERCIAL OUTDOOR


One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2019-2025 Acuity Brands Lighting, Inc. All rights reserved.

WDGE1 LED  
Rev. 04/02/25


## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

### LEGEND



MH = 8ft  
Grid = 8ft x 8ft

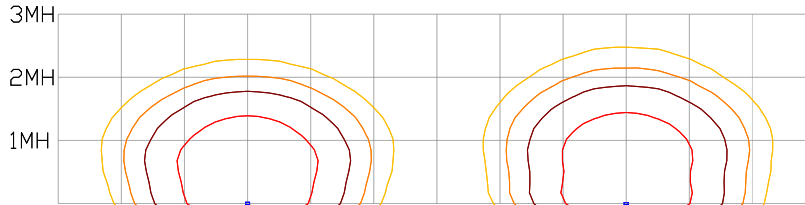

WDGE1 LED P2 40K 80CRI VW

WDGE1 LED P2 40K 80CRI VF


## Emergency Egress Options

### Emergency Battery Backup

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90 minutes.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9

The example below shows illuminance of 1 fc average and 0.1 fc minimum in emergency mode with E4WH and VF distribution.

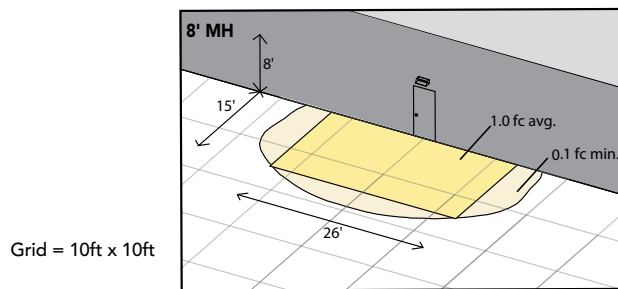


WDGE1 LED xx 40K 80CRI VF MVOLT E4WH

### Dual Switching (DS) Option

The dual switching option offers operational redundancy that certain codes require. With this option the luminaire comes integrated with two drivers and two light engines. These work completely independent to each other so that a failure of any individual component does not cause the whole luminaire to go dark.


Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9



### Dual Switching Light Engine (DSLE) Option

The dual switching option offers operational redundancy that certain codes require. With this option the luminaire comes integrated with one driver and two light engines. These work completely independent to each other so that a failure of either light engine does not cause the whole luminaire to go dark.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9





**E4WH – 4W Emergency Battery Backup**

D = 5.5"

H = 8"

W = 9"



**PBBW – Surface-Mounted Back Box**

**Use when there is no junction box available.**

D = 1.75"

H = 8"

W = 9"



**AWS – 3/8inch Architectural Wall Spacer**

D = 0.38"

H = 4.4"

W = 7.5"

## FEATURES & SPECIFICATIONS

### INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

### CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP66 rating for the luminaire.

### FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

### OPTICS

Well crafted reflector optics allow the light engine to be recessed within the luminaire, providing visual comfort, superior distribution, uniformity, and spacing in wall-mount applications. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine consists of high-efficiency LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2). Fixture ships standard with 0-10v dimmable driver.

### INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 2700K and 3000K color temperature only and SRM mounting only.

### GOVERNMENT PROCUREMENT

BABA – Build America Buy America: Product qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.