
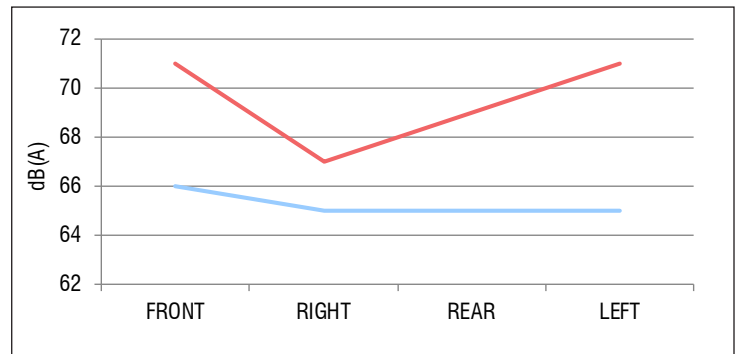


LEVEL 2 SOUND ATTENUATED ENCLOSURE

D4.5L SD050

60Hz NO-LOAD, dB(A)										DISTANCE: 7 METERS
MICROPHONE LOCATION	OCTAVE BAND CENTER FREQUENCY (Hz)									
	31.5	63	125	250	500	1,000	2,000	4,000	8,000	dB(A)
FRONT	31	56	59	58	62	58	54	50	42	66
RIGHT	31	58	55	58	59	55	50	47	41	65
REAR	29	60	54	56	60	54	49	45	38	65
LEFT	30	55	57	58	60	57	53	49	43	65
AVERAGE	30	57	57	57	60	56	51	48	41	65

60Hz FULL-LOAD, dB(A)										DISTANCE: 7 METERS
MICROPHONE LOCATION	OCTAVE BAND CENTER FREQUENCY (Hz)									
	31.5	63	125	250	500	1,000	2,000	4,000	8,000	dB(A)
FRONT	31	61	67	59	64	60	57	56	50	71
RIGHT	30	57	62	60	61	58	55	52	46	67
REAR	27	65	60	61	61	56	52	51	43	69
LEFT	29	65	67	60	63	58	58	55	49	71
AVERAGE	30	62	64	60	62	58	55	53	47	69

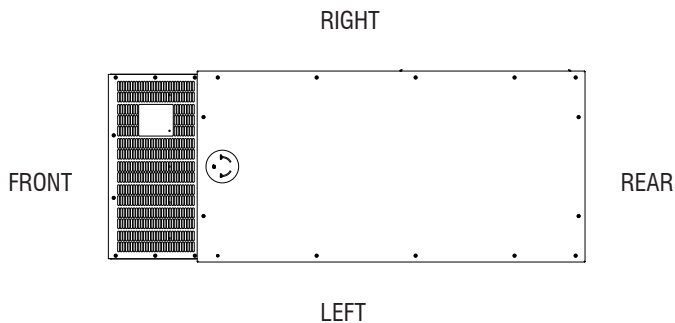

- All positions at 23 feet (7 meters) from side faces of generator set.
- Test conducted on a 100 foot diameter asphalt surface.
- Sound pressure levels are subject to instrumentation, installation and testing conditions.
- Sound levels are ± 2 dB(A).