



SITE TREE SCHEDULE

QTY	BOTANICAL NAME	COMMON NAME	SIZE
3	ACER X FREEMANII 'MARMO'	RED MAPLE	2.5"
3	ACER SACCHARUM 'GREEN MOUNTAIN'	SUGAR MAPLE	2.5"
5	AMELANCHIER 'AUTUMN BRILLIANCE'	SERVICEBERRY	6'
5	BETULA NIGRA	RIVER BIRCH	6'
2	CELTIS OCCIDEN. 'CHICAGOLAND'	HACKBERRY	2.5"
6	CRATAEGUS 'INERMIS'	THORNLESS HAWTHORN	2"
8	MALUS SP. 'PROFUSION'	PROFUSION CRAB	2"
6	MALUS SP. 'SPRING SNOW'	SPRING SNOW CRAB	2"
5	PICEA PUNGENS 'GLAUCA'	BLUE SPRUCE	6'
4	PINUS STROBUS	WHITE PINE	6'
7	PSEUDOTSUGA MENZIESII	DOUGLAS FIR	6'
4	QUERCUS RUBRA	RED OAK	2.5"
2	SYRINGA RETICULATA 'IVORY SILK'	JAPANESE TREE LILAC	2"
3	TILIA CORDATA 'GREENSPIRE'	LITTLE LEAF LINDEN	2.5"
2	ULMUS SP. 'HOMESTEAD'	HOMESTEAD ELM	2.5"

NOTES AND SPECIFICATIONS

1. ALL LANDSCAPING SHALL BE INSTALLED IN ACCORDANCE WITH CITY, VILLAGE OR OTHER LOCAL LANDSCAPING OR CONSTRUCTION SPECIFICATIONS
2. ALL INDIVIDUAL TREES TO RECEIVE 3" CLEAN SHREDDED HARDWOOD BARK MULCH IN A 5' DIAMETER MOW RING.
3. ALL PLANTING BEDS TO RECEIVE 3" MIN. SHREDDED BARK MULCH.
4. ALL PLANTING BEDS TO BE SPADE EDGED.
5. ALL PLANT MATERIAL TO BE OF SPECIMEN QUALITY AND MEET THE AMERICAN STANDARDS FOR NURSERY STOCK, WHICH IS PUBLISHED BY THE ANA (AMERICAN ASSOCIATION OF NURSERYMEN).
6. ALL PLANTS (UNLESS OTHERWISE SPECIFIED) ARE TO BE BALLED & BURLAPPED OR APPROVED CONTAINER STOCK
7. CONTRACTOR TO SUBMIT IN WRITING TO PROPERTY OWNERS, A ONE YEAR-100% -PLANT GUARANTEE TO COMMENCE ON THE DAY OF PROJECT COMPLETION.
8. CONTRACTOR RESPONSIBLE FOR CALLING DIGGERS HOTLINE 1-800-242-8511 TO LOCATE ALL UTILITIES PRIOR TO STARTING PROJECT.
9. CONTRACTOR RESPONSIBLE FOR OBTAINING ANY AND ALL PERMITS REQUIRED FOR PROJECT INSTALLATION.
10. CONTRACTOR TO ADJUST PLANTINGS FOR UNDERGROUND UTILITY LINES, ESCAPE WINDOWS, CONDENSER UNITS AND UTILITY METERS AND OVERHEAD UTILITY LINES.


RIVER ROAD VILLAS

CITY OF WAUKESHA, WISCONSIN

AUGUST 22, 2025

BY: SIS

**BIELINSKI**  
HOMES

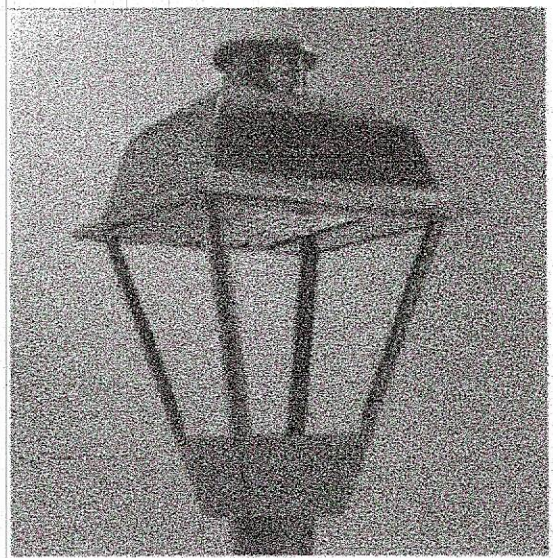

STREET LIGHT FIXTURES-BLACK

SITE LANDSCAPING