



TRACKPAD DETAILS

NO SCALE


CONSTRUCTION SEQUENCE CONSTRUCTION START: 04/01/2021 construction end: 09/01/2021
TYPE OF ACTION
1. CONTRACTOR TO CALL DIGGERS HOTLINE AT A MINIMUM OF 3 DAYS PRIOR TO CONSTRUCTION.  2. PLACE ALL SILT FENCE AND TEMPORARY EROSION CONTROL  3. CONSTRUCT TRACKING STONE ENTRANCES AS NEEDED.  4. CONSTRUCT PERMANENT PERMANENT STORMWATER CONVEYANCE SYSTEMS.  5. STABILIZE ALL TEMPORARY AND PERMANENT EROSION CONTROL AND STORMWATER CONVEYANCE SYSTEMS BEFORE TOPSOIL CAN BE STRIPPED.
1. SITE DEMOLITION AS REQUIRED.  2. STRIP AND RELOCATE TOPSOIL TO THE DESIGNATED TOPSOIL STOCKPILE. FINAL LOCATION BY CONTRACTOR (VERIFY W/ OWNER). PROVIDE PERIMETER SILT FENCE UNTIL STABLIZED.  3. BEGIN MASS EARTH WORK FOR THE BUILDING PAD AND PAVEMENT AREAS.
<ol> <li>CONSTRUCT ANY REMAINING STORMWATER CONVEYANCE SYSTEMS, AND INSTALL ALL OTHER UTILITIES ON SITE.</li> <li>DIG AND POUR ALL BUILDING FOOTINGS.</li> <li>PLACE GRAVEL FOR ALL PROPOSED PAVEMENT AREAS, INCLUDING FIRE LANES.</li> <li>TOPSOIL, SEED, AND MULCH ALL DISTURBED AREAS OUTSIDE THE BUILDING AND PROPOSED PAVEMENT AREAS.</li> <li>CONSTRUCT BUILDING.</li> <li>PAVE DRIVEWAYS AND PARKING AREAS.</li> </ol>
10. TOPSOIL, SEED, AND MULCH ALL OTHER DISTURBED AREAS. PLACE EROSION MATTING AND RIP RAP.  1. CONTRACTOR TO REMOVE TEMPORARY EROSION CONTROL MEASURES UPON SITE STABILIZATION.  2. SEE THE POST CONSTRUCTION MAINTENANCE PLAN FOR PERMANENT STORMWATER MANAGEMENT SYSTEMS.

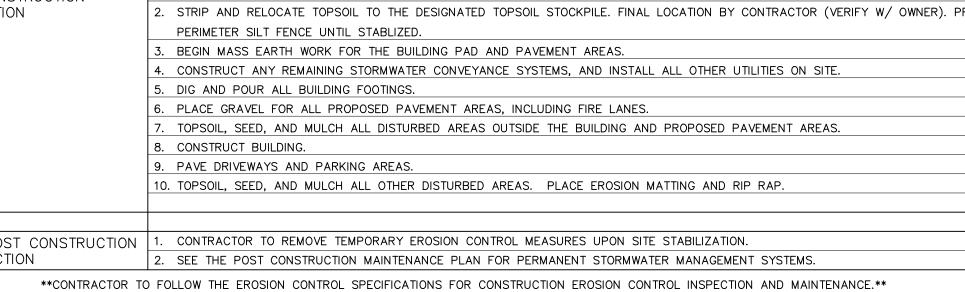

SPECIFICATION NOTE: SEE SHEET CO.1 FOR PLAN SPECIFICATIONS AND REQUIREMENTS

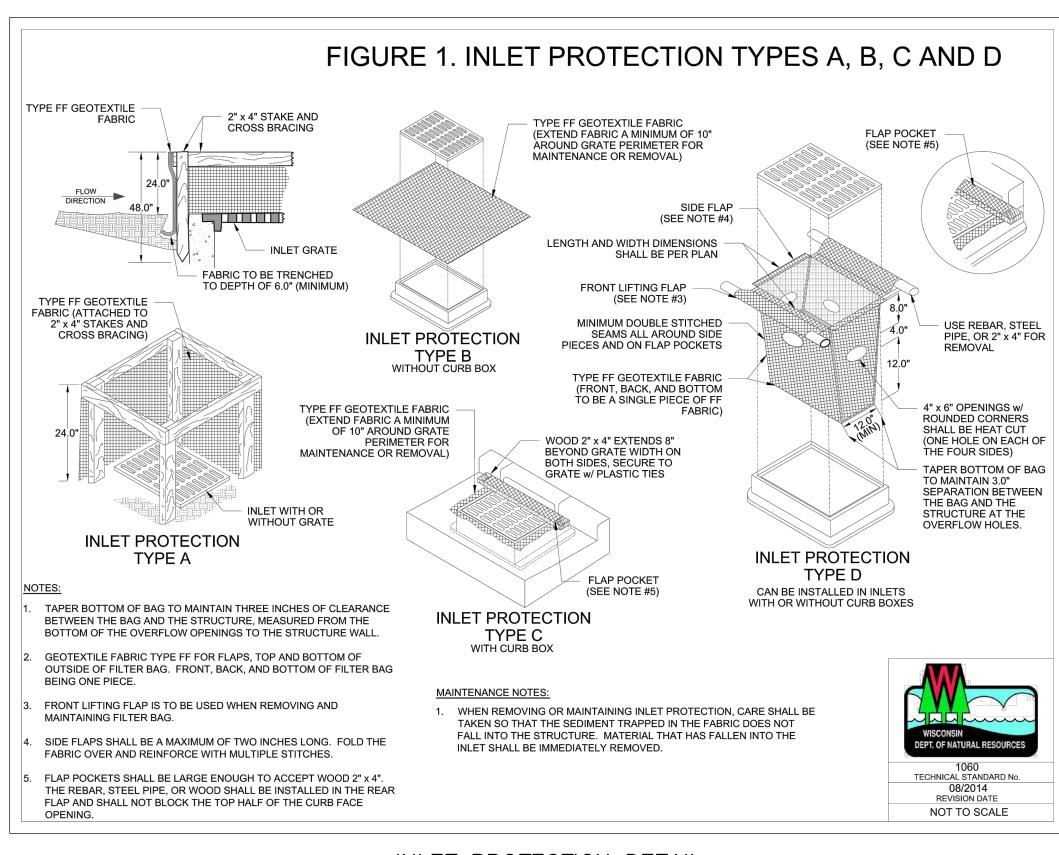

INLET PROTECTION DETAIL
NO SCALE

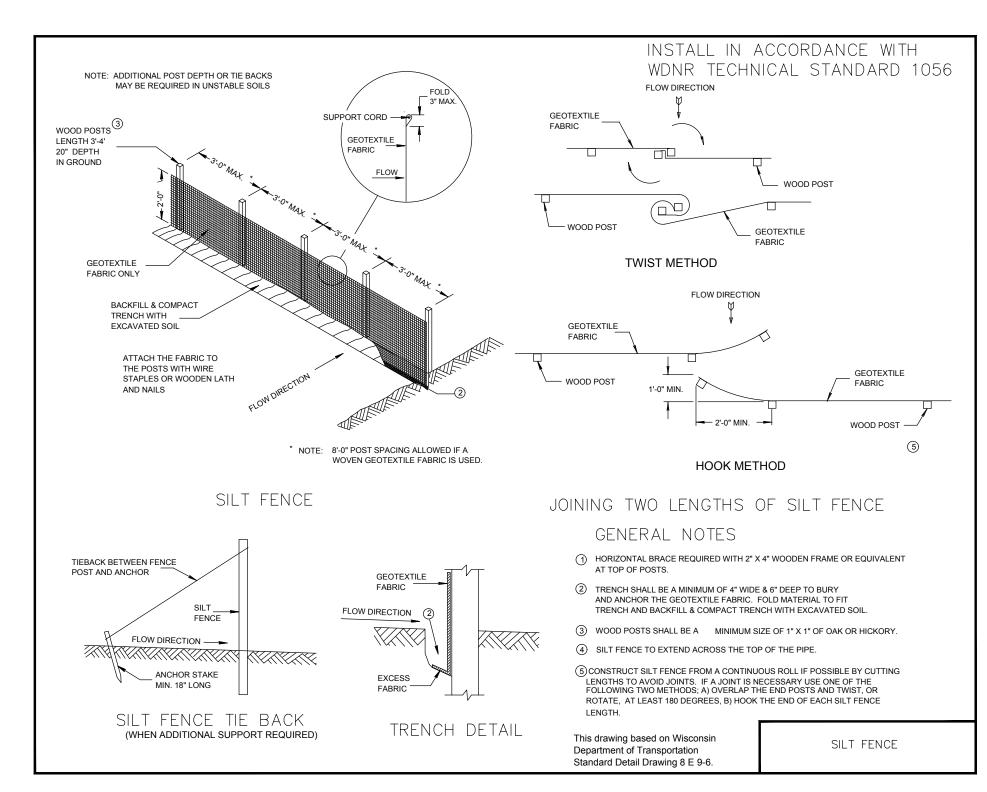

SILT FENCE — INSTALLATION DETAIL NO SCALE

ARCHITECTS ● ENGINEERS ● SURVEYORS Always a **Better Plan** 100 Camelot Drive Fond Du Lac, WI 54935 Phone: (920) 926-9800 www.EXCELENGINEER.com

PROJECT INFORMATION

0

Ы STER S

PROFESSIONAL SEAL

SHEET DATES	
SHEET ISSUE	MAR. 25, 2
REVISIONS	

JOB NUMBER 2053880

SHEET NUMBER

2021 © EXCEL ENGINEERING, INC.