



fulcrum
ACOUSTIC®

product specification

GX1226

12 inch Coaxial Loudspeaker

tq^{install}_{SERIES}™



Overview

The GX1226 is a coaxial loudspeaker that provides the output capability and pattern control of a conventional premium 2-way system, but with the directional consistency and crisp transient response that only a coaxial transducer can provide. Its single-ceramic-magnet coaxial transducer and 120° x 60° horn can be rotated in 45° increments, which allows its coverage to be tailored to an application's requirements. The compact enclosure's 40° trapezoidal angle allows it to be mounted near walls or ceilings with minimal effect on sight lines. Its unusually broad pattern is uniquely suited for use as the center channel in L-C-R systems, to solve difficult fill problems, and in many other applications.

Fulcrum Acoustic's **TQ™** processing is an integral part of the GX1226 design. Sound, innovative acoustical design combined with state of the art digital processing leads to exceptional clarity and precise transient response, even at very high sound pressure levels. The required digital signal processing can be provided by one of many supported platforms.

The GX1226 is particularly effective in systems where targeted pattern control is desirable, and is an excellent solution for high fidelity, foreground distributed systems. Its neat appearance and familiar format facilitates acceptance by interior designers and architects. This makes it the perfect choice for houses of worship, theaters, restaurants, transportation facilities, theme parks, and more.

Performance Specifications¹

Operating Mode

Single-amplified w/ DSP

Operating Range²

49 Hz to 20 kHz

Nominal Beamwidth (rotatable)

120° x 60°

Transducers

HF/LF: Coaxial 3.0" titanium diaphragm compression driver; 12.0" woofer, 3.0" voice coil; single ceramic magnet

Power Handling @ Nominal Impedance³

57 V / 400 W @ 8 Ω

Nominal Sensitivity @ Input Voltage⁴ (whole space)

101 dB @ 2.83 V

Nominal Maximum SPL (peak / continuous)

133 dB / 127 dB

Equalized Sensitivity @ Input Voltage⁵

97 dB @ 2.83 V

Equalized Maximum SPL⁶ (peak / continuous)

129 dB / 123 dB

Recommended Power Amplifier

400 W to 800 W @ 8 Ω

Physical Specifications

Connections

(2) Neutrik NL4 Speakon

Pin 1+/-: Full Range

Pin 2+/-: NC

Mounting / Suspension Points

(12) M10 x 1.5 eye bolt angle points, (2) M10 x 1.5 yoke points,

(1) M10 x 1.5 pull back point

Dimensions / Weight

See page 5

Finish

Black painted enclosure w/ matte black grille, or

White painted enclosure w/ matte white grille


Options

YK-GX12 yoke bracket, Terminal strip input, Custom color finish,


Weather-resistant (WR) enclosure & hardware




Axial Sensitivity (dB SPL, 2.83 V @ 1 m)^{7,8}

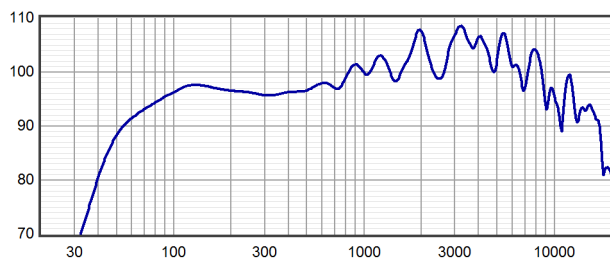


Horizontal Off Axis Response^{7,11}

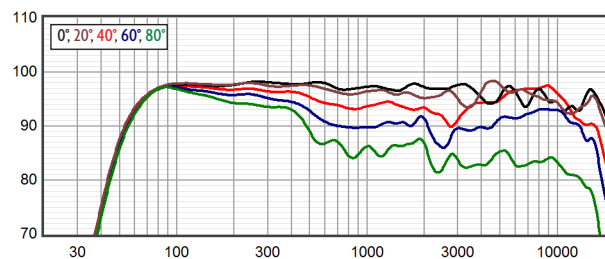


Axial Processed Response (dB)^{7,9}

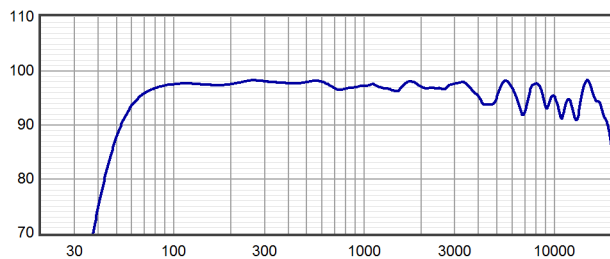


Vertical Off Axis Response^{7,11}

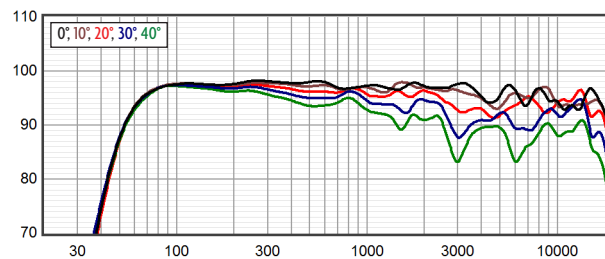


Axial Processed Phase Response (degrees)^{7,10}

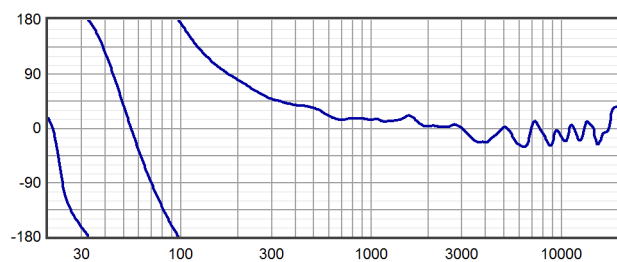


Beamwidth^{7,12}

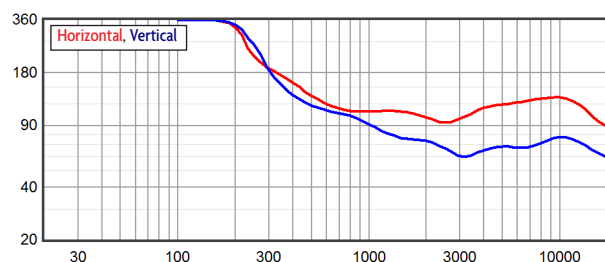

Impedance (ohms)

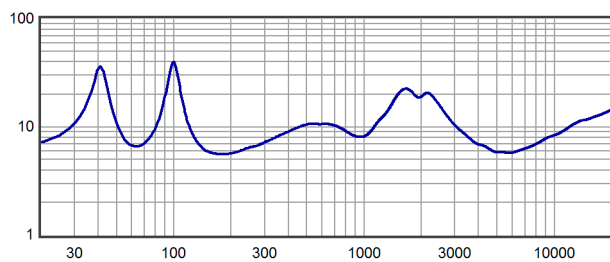


Directivity Index (dB)¹³

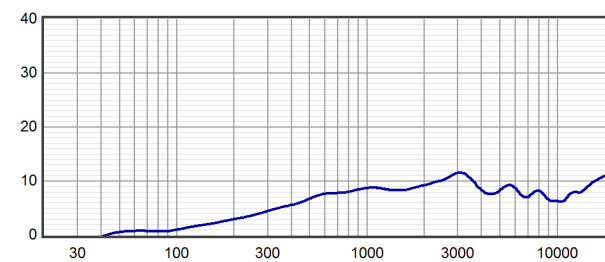




Horizontal Polar Response (30 dB Scale, 6 dB per Major Division)

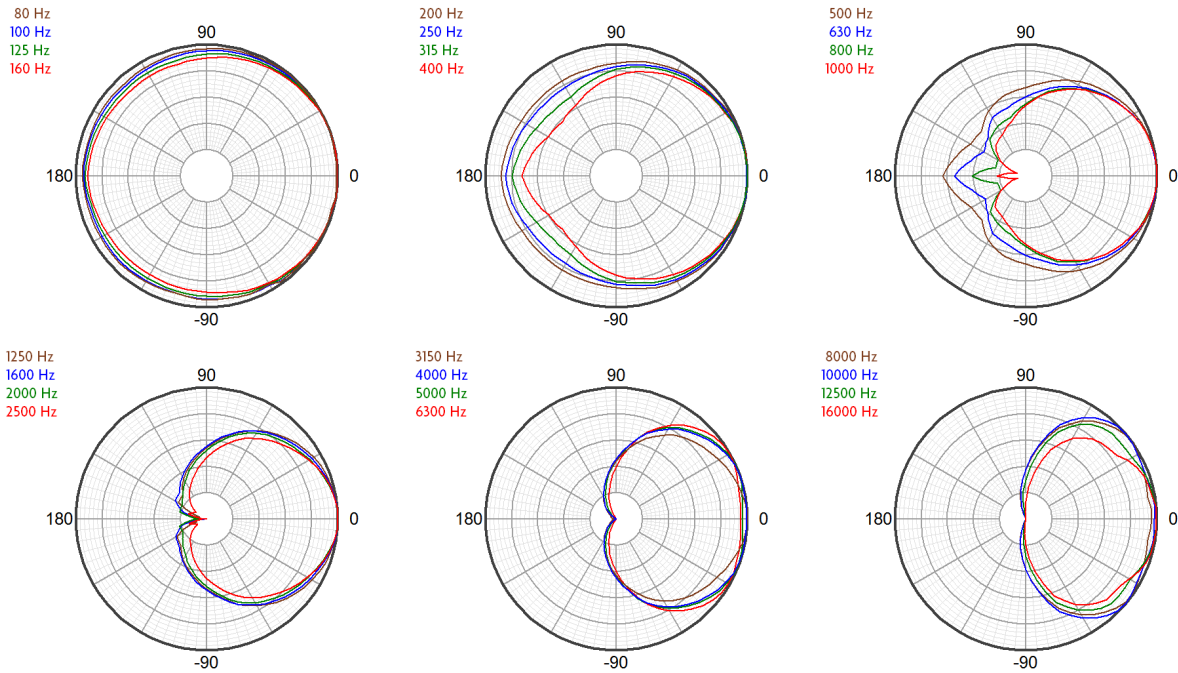

Vertical Polar Response (30 dB Scale, 6 dB per Major Division)

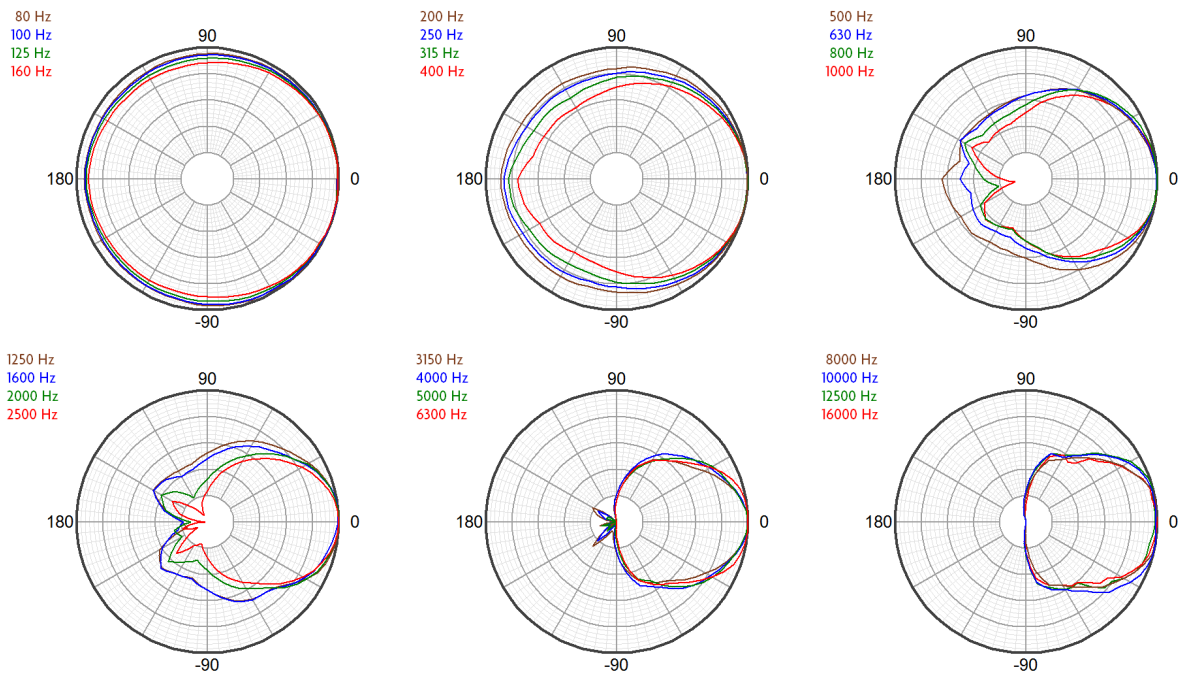



Technologies

The proprietary horns employed in the GX Series represent a modern digital-signal-processing-aware update to the traditional horn-loaded coaxial loudspeaker concept. The well-known benefits of the coaxial approach have been realized without the familiar shortcomings of historical designs. Fulcrum Acoustic's **Temporal Equalization™ (TQ™)** digital signal processing techniques eliminate midrange colorations and high frequency harshness while producing a smooth, seamless coverage pattern through the crossover range. In fact, the coaxial transducers were designed from the ground up to take advantage of the unique capabilities of TQ™.


The coaxial transducer in the GX1226 includes a 3 inch diaphragm compression driver. The large diaphragm area permits the compression driver to operate at frequencies too low for smaller

compression drivers to handle. This allows the high frequency horn to smooth the polar response of the low frequency section in the frequency range where the horn would otherwise cause shadowing. It also allows the compression driver to produce extreme sound pressure levels with an effortless sonic character.

The coaxial woofer's large radiating surface works in conjunction with the HF horn to improve directional control at the bottom of the horn's operating range, increasing directional control beyond what can be accomplished by the horn alone. The coaxial transducer's single-ceramic-magnet, dual-gap geometry not only minimizes cost and weight; it also allows very tight spacing between the compression driver and woofer voice coils. The delay between the driver outputs is thereby minimized, which allows the coaxial device to work well with a passive crossover.

Connection Diagram

2-way, Single-Amp

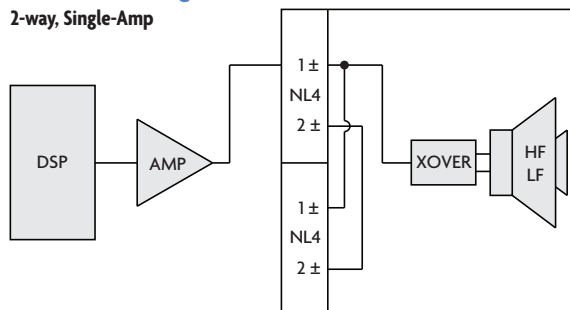

Mechanical Specification Drawings

2D and 3D DWG dimensional drawings are available for download at www.fulcrum-acoustic.com/support.

Notes

- ¹ **Performance Specifications** All acoustic specifications rounded to nearest whole number. External DSP with Fulcrum Acoustic-provided settings is required to achieve the specified performance.
- ² **Operating Range** The frequency range within which the processed response is within 10 dB of the average.
- ³ **Power Handling** Based on the AES power handling of the transducers.
- ⁴ **Nominal Sensitivity** The 1-meter-referenced SPL produced by a 1 watt band limited pink noise signal, with no processing applied.
- ⁵ **Equalized Sensitivity** The 1-meter-referenced SPL produced when an EIA-426-B signal is applied to an equalized loudspeaker system, at a level which produces a total power of 1 watt, in sum, to the loudspeaker subsections.
- ⁶ **Equalized Maximum SPL** The 1-meter-referenced SPL produced when an EIA-426-B signal is applied to an equalized loudspeaker system, at a level which drives at least one subsection to its rated power.
- ⁷ **Resolution** All response graphs are subjected to 1/6 octave cepstral smoothing with a gaussian weighting function.
- ⁸ **Axial Sensitivity** The SPL plotted against frequency for a 1 watt swept sine wave, referenced to 1 m with no signal processing.
- ⁹ **Axial Processed Response** The axial magnitude response with recommended signal processing applied.
- ¹⁰ **Axial Processed Phase Response** The axial phase response with recommended signal processing applied, and latency removed.
- ¹¹ **Horizontal / Vertical Off Axis Responses** The magnitude response at various angles off axis, with recommended signal processing applied.
- ¹² **Beamwidth** The angle between the -6 dB points in a loudspeaker's polar response.
- ¹³ **Directivity Index (Di)** The ratio of the on-axis sound pressure squared to the spherical average of the sound pressure squared at a particular frequency expressed in dB. To convert the directivity index to directivity factor (Q) use the formula $10^{Di/10}$.




product specification

Notes:

1. Net Weight = Approx. 43.0 lb / 19.5 kg
2. Ship Weight = Approx. 51.0 lb / 23.1 kg
3. Symbol = M10x1.5 eye bolt angle point
4. Symbol = M10x1.5 nut plate
5. Symbol = CoG
6. Drawing representative of:
GX1200, GX1226, GX1265, GX1277, GX1295

REVISIONS

REV	DESCRIPTION	APPR / DATE
1	NEW ISSUE	RAF 5/8/12
2	ADD TRAP ANGLE DIM	RAF 11/21/12
3	ADD "GX1226" TO NOTE 6	RAF 7/22/13
4	ADD "GX1200" TO NOTE 6	RAF 9/16/15
5	ADD MTG PT THREAD PITCH TO NOTES	RAF 7/27/20

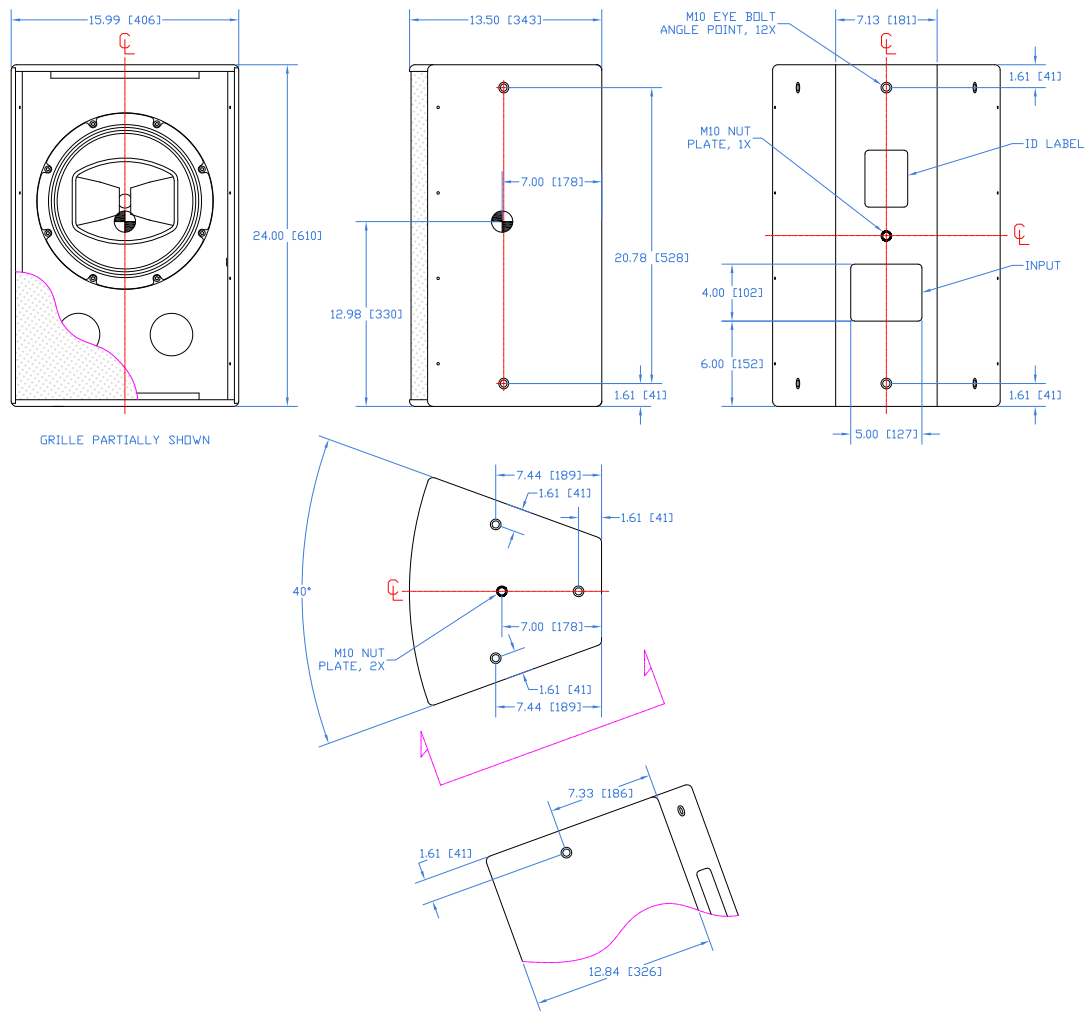


<p>THIRD ANGLE PROJECTION</p>	<p>UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES</p> <p>TOLERANCE IN INCHES .XX±.015 .XXX±.005 FRACTIONS ±1/32 ANGLES ±1/2°</p> <p>(XXX) = REF DIMS NO TOLERANCE IMPLIED</p> <p>TSC = THEORETICAL SHARP CORNER</p> <p>DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL</p>	<p>STATUS RELEASED</p>		<p>FULCRUM ACOUSTIC, LLC 670 LINWOOD AVE., LINWOOD, MA 01525 USA</p>
		<p>APPROVALS</p> <p>DRAWN: RAF</p> <p>CHECKED: DWG</p> <p>DES ENG:</p> <p>MFG ENG:</p>	<p>DATE</p> <p>5/8/12</p> <p>5/8/12</p>	
<p>THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.</p>		<p>A</p>	<p>SHEET 1 OF 1</p>	<p>SCALE: 1:12</p>
		<p>DWG. NO. 820-100-055</p>	<p>REV 5</p>	

Drawing is reduced. Do not scale.



product specification, weather-resistant (WR) version

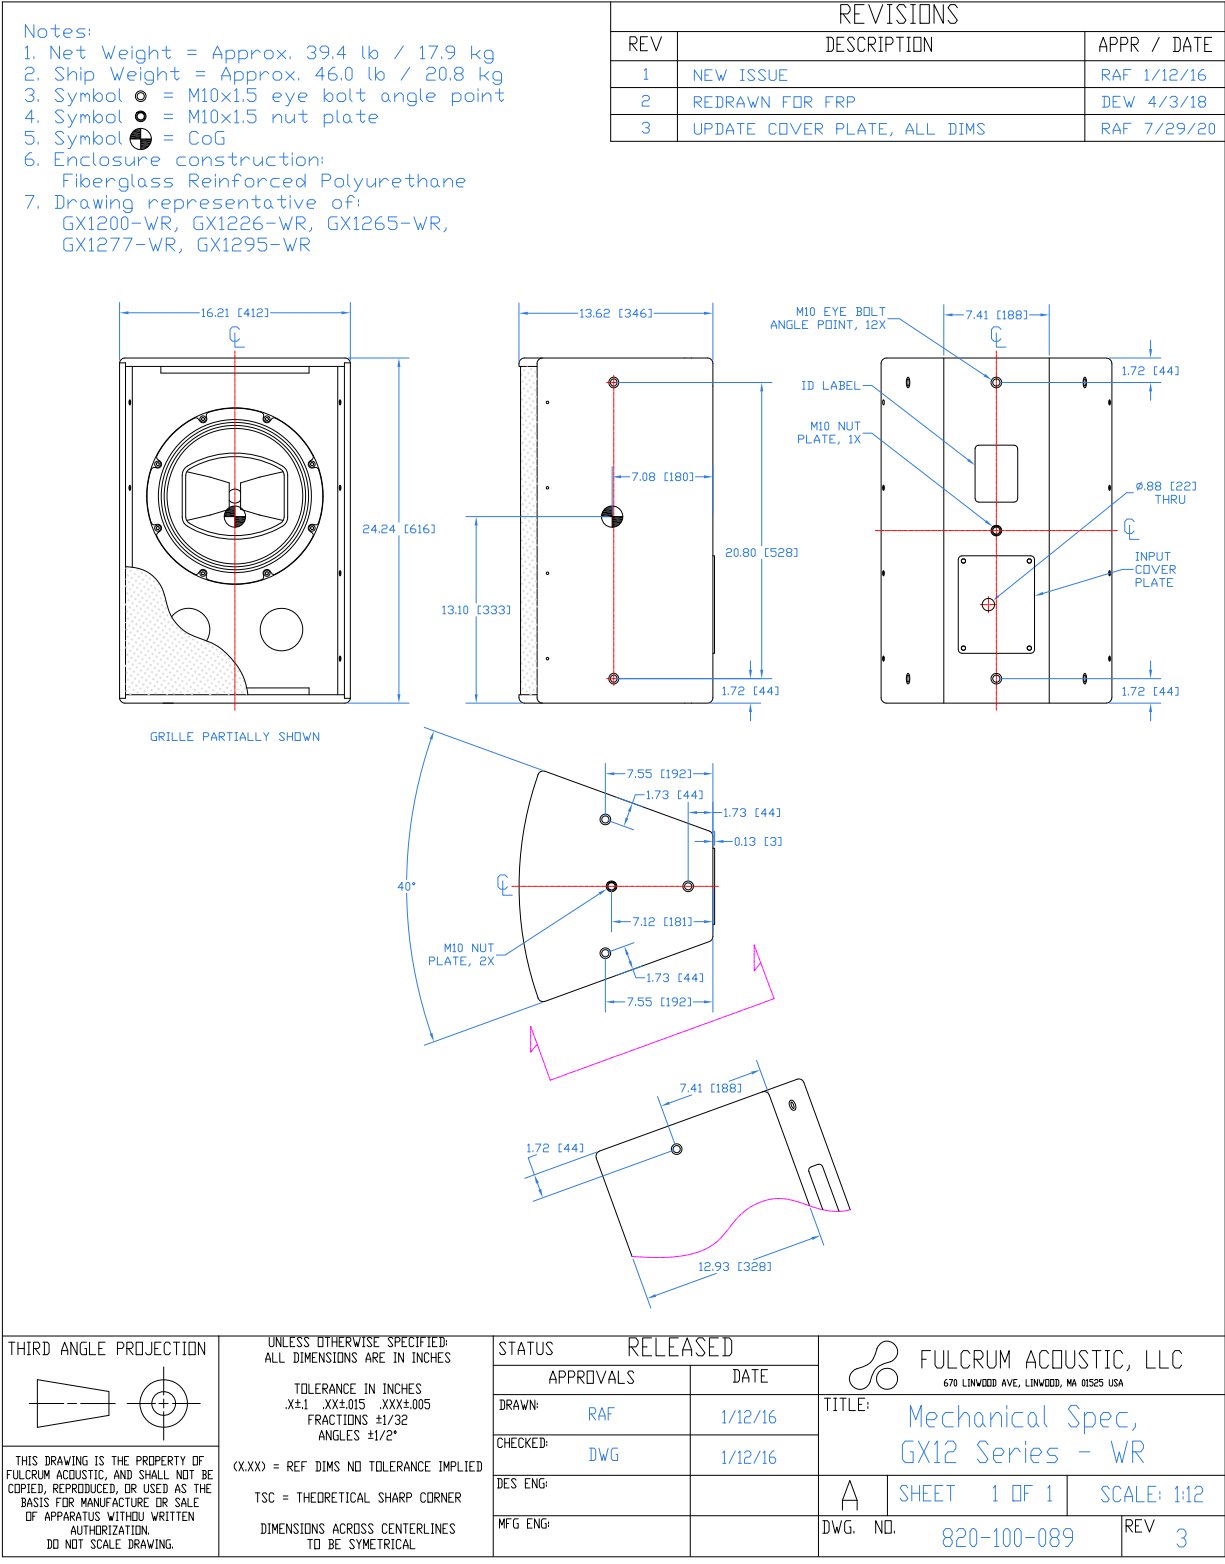

THIRD ANGLE PROJECTION

THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.

UNLESS OTHERWISE SPECIFIED:
ALL DIMENSIONS ARE IN INCHES

TOLERANCE IN INCHES
.XX1 .XX±.015 .XXX±.005
FRACTIONS ±1/32
ANGLES ±1/2°

(XXX) = REF DIMS NO TOLERANCE IMPLIED

TSC = THEORETICAL SHARP CORNER

DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL

STATUS		RELEASED	
APPROVALS		DATE	
DRAWN:	RAF	1/12/16	
CHECKED:	DWG	1/12/16	
DES ENG:			
MFG ENG:			

FULCRUM ACOUSTIC, LLC
670 LINWOOD AVE., LINWOOD, MA 01525 USA

TITLE: Mechanical Spec,
GX12 Series - WR

A SHEET 1 OF 1 SCALE: 1:12


DWG. NO. 820-100-089 REV 3


Drawing is reduced. Do not scale.

REVISIONS		
REV	DESCRIPTION	APPR / DATE
1	NEW ISSUE	06/26/20
2	UPDATE NOTES & WASHER QTY	01/12/21


Notes:

1. Fits: GX12 Series
2. Net Weight: Approx. 9.3 lb / 4.2 kg
3. Material: 8 GA ASTM A36 steel
4. Includes 2x each M10 socket head cap screws, split washers, and flat washers

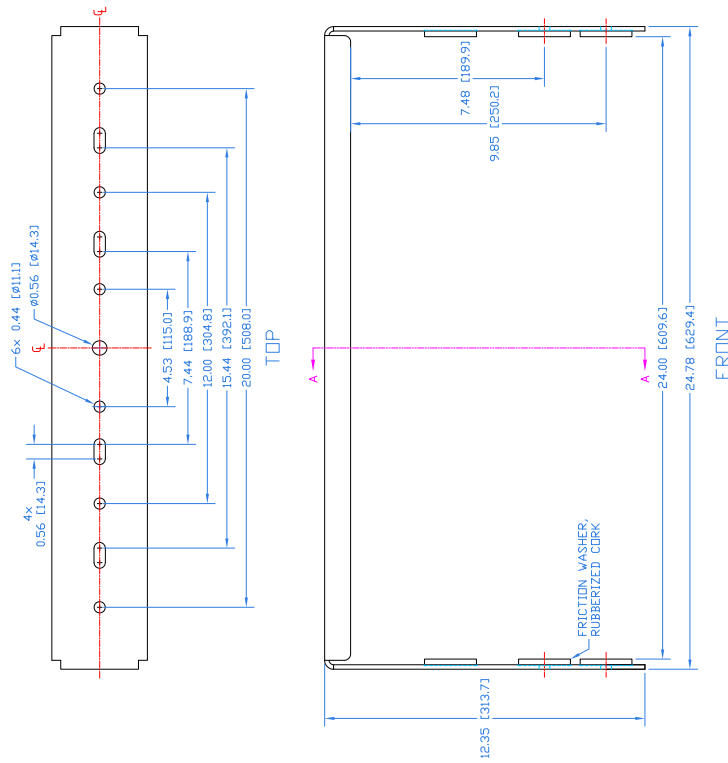

THIRD ANGLE PROJECTION		STATUS		RELEASED			
 <p>THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR FOR ANY APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.</p>		<p>UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES</p> <p>TOLERANCE IN INCHES .X41 .XXE.005 .XXX.005 FRACTIONS 1/32 ANGLES 1/2°</p> <p>Ø.XXX = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL</p>		<p>APPROVALS</p> <p>DRAWN: RAF</p> <p>CHECKED: DWG</p> <p>DRAWN: MFG ENG</p>		<p>DATE</p> <p>06/26/20</p> <p>06/30/20</p>	
<p>FULCRUM ACOUSTIC, LLC 670 LINCOLN AVE. WATKINSVILLE, MN 55981 USA</p>		<p>TITLE: Mechanical Spec, YK-GX12 Yoke Bracket</p>		<p>A SHEET 1 OF 1 SCALE: 1:6</p>			
		<p>DWG. NO. 820-300-032</p>		<p>REV 2</p>			

Drawing is reduced. Do not scale.

<p>Notes: The YK-GX12 yoke bracket is designed to mount GX12 Series loudspeakers in a horizontal orientation. It is fitted with two mounting holes which allow the installer to vary the distance between the loudspeaker enclosure and the mounting surface. Note that the range of motion is restricted when the enclosure is mounted closer to the yoke. The maximum range of motion is achieved when the enclosure is mounted to the holes nearest the end of the bracket arms.</p>	<table border="1"> <tr> <th>REV</th> <th>DESCRIPTION</th> <th>APPR / DATE</th> </tr> <tr> <td>1</td> <td>NEW ISSUE</td> <td>RAF 06/26/20</td> </tr> </table>	REV	DESCRIPTION	APPR / DATE	1	NEW ISSUE	RAF 06/26/20												
REV	DESCRIPTION	APPR / DATE																	
1	NEW ISSUE	RAF 06/26/20																	
	<table border="1"> <tr> <td>STATUS</td> <td>RELEASED</td> <td>DATE</td> </tr> <tr> <td>APPROVALS</td> <td>RAF</td> <td>06/26/20</td> </tr> <tr> <td>DRAWN</td> <td>RAF</td> <td>06/30/20</td> </tr> <tr> <td>CHECKED</td> <td>DVG</td> <td></td> </tr> <tr> <td>DWG ENG</td> <td></td> <td></td> </tr> <tr> <td>MFG ENG</td> <td></td> <td></td> </tr> </table>	STATUS	RELEASED	DATE	APPROVALS	RAF	06/26/20	DRAWN	RAF	06/30/20	CHECKED	DVG		DWG ENG			MFG ENG		
STATUS	RELEASED	DATE																	
APPROVALS	RAF	06/26/20																	
DRAWN	RAF	06/30/20																	
CHECKED	DVG																		
DWG ENG																			
MFG ENG																			
<p>THIRD ANGLE PROJECTION</p>  <p>UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCE IN INCHES .X41 .XX4.015 .XXX4.005 FRACTIONS 1/16 1/32 ANGLES 1/2°</p> <p>XXX = REF DIMS NO TOLERANCE IMPLIED TSC = THEORETICAL SHARP CORNER DIMENSIONS ACROSS CENTERLINES TO BE SYMMETRICAL</p> <p>THIS DRAWING IS THE PROPERTY OF FULCRUM ACOUSTIC, AND SHALL NOT BE COPIED, REPRODUCED, OR USED AS THE BASIS FOR MANUFACTURE OR REPAIR OF APPARATUS WITHOUT WRITTEN AUTHORIZATION. DO NOT SCALE DRAWING.</p>	<p>FULCRUM ACOUSTIC, LLC 670 LINDOOD AVE. WHITINSVILLE, MA 01388 USA</p> <p>TITLE: Mechanical Spec, YK-GX12 + GX12xx Assembly</p> <p>A SHEET 1 OF 1 SCALE: 1:8 DWG. NO. 820-300-033 REV 1</p>																		

Drawing is reduced. Do not scale.